

SPEAKMAN® SE-8000

Emergency Tank Shower

EYE/FACE WASH FEATURES:

- Yellow Plastic Bowl
- (2) yellow plastic spray outlets with flip-top dust caps
- ½" NPT female brass, chrome-plated, full flow stay-open ball valve
- Stainless steel push handle activator

SHOWER FEATURES:

- Insulated 528 gallon (2000 ltr) Polyethylene Tank
- Support frame constructed from 1-1/2 x 1-1/2 x 1/8 hot dipped galvanized tubular steel, with fixed bolt down brackets
- Ø10-1/4" stainless steel showerhead
- 1-1/2" NPT female stainless steel full flow ball valve, activated by yellow steel Push Bar
- Mechanical water level gauge
- 1" NPT water fill inlet, with valve and ball float for automatic shutoff when tank is full
- 1" NPT water overflow outlet
- 240 Volt, Single Phase, 50/60Hz, 13.88 Amps
- 3kw Immersion Heater that will maintain an approximate water temperature of 86° F at an ambient temperature of 14 °F.
- Heat Tracing for Shower and Eyewash Piping
- PIR Sensor & Area Downlight
- Thermal cutoff to shutoff electrical power to prevent overheating conditions
- Universal emergency signage
- Weights:
 - 1598 lbs. (un-filled)
 - 6004 lbs. (filled)

OPTIONS:

- Treadle plate activator for main shower
 - Water Collection Bund
 - Eyewash with Stainless Steel Bowl
 - Privacy Screens (3) Sides
 - Stainless Steel Support Frame
 - Digital Water Lever & Water Temperature Gauge
 - Alarm System for both Shower & Eyewash
- TS-TREADLE
 - TS-BUND
 - TS-SSEYEWASH
 - TS-SCREENS
 - TS-SSSUPPORT
 - TS-GAUGE
 - TS-ALARM

COMPLIANCE:


- Complies to ANSI/ISEA Z358.1
- Constructed using UL Approved Electrical Components

WARRANTY:

- 3 year (general mechanical) limited
- 1 year (electrical equipment) limited



NOTE: 1. All dimensions are in millimeters unless otherwise specified and are subject to change without notice.

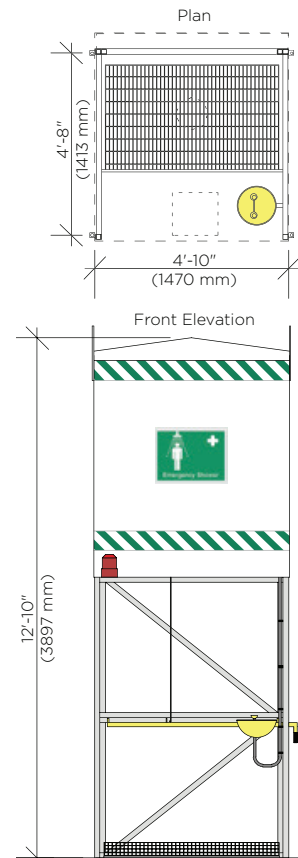

Architect/Engineer Approval Space:

SPEAKMAN
400 ANCHOR MILL ROAD
NEW CASTLE, DE 19720

P: 800-537-2107
F: 800-977-2747
W: WWW.SPEAKMAN.COM
R: JULY 2017