



Installation Guide

Wall-Mount Lavatories

K-2005, K-2006, K-2007



K-2053, K-2054, K-2084

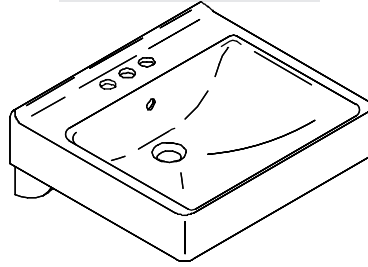

M product numbers are for Mexico (i.e. K-12345**M**)
Los números de productos seguidos de
M corresponden a México (Ej.
K-12345**M**)
Français, page "Français-1"
Español, página "Español-1"

1018370-2-B

THE BOLD LOOK
OF **KOHLER**®

Tools and Materials




Safety Glasses



Pencil



Tape Measure



Adjustable Wrench



Drill



Screwdriver

Plus:


- 3/8" Lag Bolts and Washers

Thank You For Choosing Kohler Company


We appreciate your commitment to Kohler quality. Please take a few minutes to review this manual before you start installation. If you encounter any installation or performance problems, please don't hesitate to contact us. Our phone numbers and website are listed on the back cover. Thanks again for choosing Kohler Company.

Before You Begin

- Observe all local plumbing and building codes.
- Prior to installation, unpack the new lavatory and inspect it for damage. Return the lavatory to its protective carton until you are ready to install it.
- Inspect the drain and supply tubing. Replace if necessary.
- These instructions are for installing the lavatory to wood frame construction. For other installations, supply suitable bracing and fastening devices of sufficient size and strength.
- The walls and floor must be square, plumb, and level.



Hanger Installation

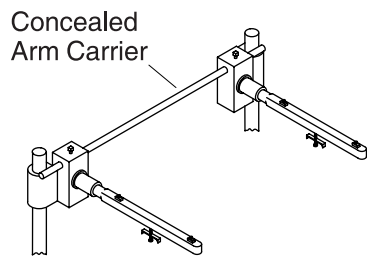

Arm Carrier Installation

1. Preparation


- Install the water supplies and drain piping according to the roughing-in information.
- Install sufficient backing behind the finished wall to provide a secure material for the anchoring devices.

Hanger (provided) Installation

- Install the hanger according to the roughing-in information. Use 1/4" lag bolts and washers (neither is provided) or other suitable fasteners to secure the hanger to the finished wall and backing material. Make sure the hanger is level.

Concealed Arm Carrier Installation

- Install the concealed arm carrier according to the roughing-in information. Follow the installation information included with the carrier. Make sure the carrier is level.

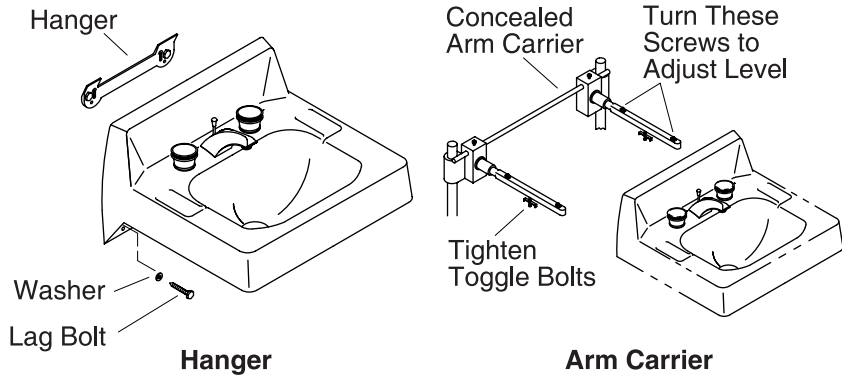

2. Install the Lavatory

- Install the faucet and drain to the lavatory according to the manufacturer's instructions.

Installation With Hanger

- Temporarily position the lavatory on the hanger, and level. Use a pencil to mark the anchoring hole locations on the finished wall. Remove the lavatory.
- Drill 1/4" mounting holes at the marked locations on the wall.



CAUTION: Risk of product damage. Do not overtighten the hardware. Overtightening may damage the product.

- Position the lavatory on the hanger, and level. Use 3/8" lag bolts and washers (not provided) to secure the lavatory to the finished wall and backing material.
- Connect and tighten the trap to the drain, and complete the water supply connections to the faucet according to the instructions packed with the faucet.
- Run water into the lavatory and check for leaks.
- Clean up with a non-abrasive cleaner.

Installation With Concealed Arm Carrier



CAUTION: Risk of product damage. Do not overtighten the hardware. Overtightening may damage the product.

Install the Lavatory (cont.)

- Slide the lavatory completely onto the carrier arms. Adjust the level of the lavatory by turning the front and rear carrier arm screws in or out as needed. The lavatory should not rock after it has been leveled.
- Carefully tighten the toggle screws until the lavatory is securely held in place.
- Connect and tighten the trap to the drain, and complete the water supply connections to the faucet according to the instructions packed with the faucet.
- Run water into the lavatory and check for leaks.
- Clean up with a non-abrasive cleaner.