


12-OUTLET SURGE PROTECTOR

B1206

USER MANUAL

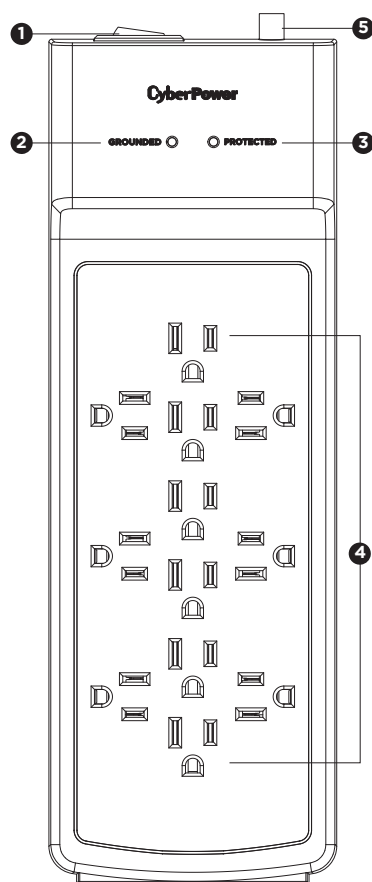

FEATURES

1. ON/OFF Reset Control Switch and Circuit Breaker

Controls power to all outlets. The switch is also a 15 A breaker. When an overload occurs, it will automatically switch off. To resume operation, ensure the overload condition is removed and reset the surge protector by switching the unit ON.

2. Grounded LED Indicator

Illuminated when the surge protector is properly grounded.

3. Protected LED Indicator

Illuminated when the surge protection feature is working properly.

4. Standard Grounded Outlets (12)

5. Power Cord

SPECIFICATIONS

Model Number:	B1206
Outlets:	Standard Grounded Outlets (12)
Power Cord Length:	6 ft
Surge Protection:	3000 Joules
Electrical Rating:	125 V/15 A/60 Hz/1875 W
UL Clamping Voltage:	UL 1449 4th/600V (L-N, L-G, N-G)
Maximum Peak Current:	90000A
3 AC Lines Protected:	L-N: 60000 A; L-G: 15000 A; N-G: 15000A
Response Time:	Less than 1 nanosecond
Circuit Breaker:	Resettable 15 Amp

⚠ WARNING: This product can expose you to chemicals including bisphenol A (BPA) and styrene (ABS), which is known to the State of California to cause reproductive harm and cancer. For more information, go to www.P65Warnings.ca.gov.

CAUTION

TO REDUCE THE RISK OF ELECTRIC SHOCK:

Use only in dry locations and only indoors.

DO NOT plug into another relocatable power tap.

DO NOT "daisy chain" surge protectors.

DO NOT use with any aquarium equipment.

DO NOT use if properly grounded outlets are not available.

DO NOT install this device if there is less than 10 meters (30 feet) of wire between the electrical outlet and electrical service panel.

DO NOT use for medical or life support equipment. This device features an internal protection that will disconnect the surge protective component at the end of its useful life, but it will maintain unprotected power to the load.

TROUBLESHOOTING

If the ON/OFF is switched OFF, the 15 Amp circuit breaker may have tripped. Examine your connected equipment and remove the device that is overloading the circuit. Then, turn the ON/OFF switch back to RESET.

If the grounded indicator does not light when you plug in the surge protector, move the surge protector to a different grounded three-prong AC outlet. If it still does not light, return the product to the retailer for assistance. If the surge protector appears to be working properly, your outlets may not be properly grounded and need to be repaired by a professional electrician.

If the protected indicator does not light, the surge protector's AC lines are no longer protected from surge. The surge protector may have received a power surge or spike beyond its specified limits that overloaded the protection circuitry and rendered it inactive. The surge protector has protected your connected equipment as designed, but it will not protect against future surges and spikes. It should be replaced.

FOR MORE INFORMATION

Visit CyberPowerSystems.com for more information regarding:

- Product information and certifications
- Product warranty
- Connected equipment guarantee

TECHNICAL SUPPORT

Visit: CyberPowerSystems.com/support

Toll-Free: 1-877-297-6937

Hours of Operation: Monday - Friday: 7:00am - 6:00pm CST

© 2022 Cyber Power Systems (USA), Inc. All rights reserved.
All other trademarks are the property of their respective owners.

Cyber Power Systems (USA), Inc.

4241 12th Avenue East, Suite 400 | Shakopee, MN 55379

CyberPowerSystems.com