


6-OUTLET SURGE PROTECTOR

B6032PK/B604/B604BK/B608/B6012

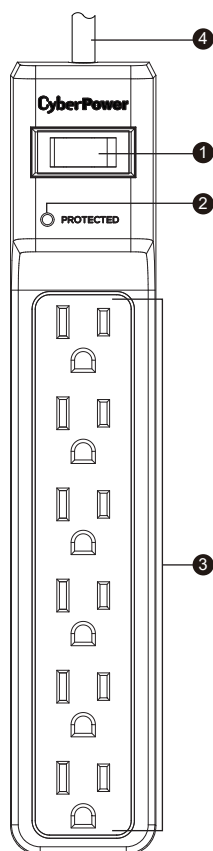

FEATURES

1. ON/OFF Reset Control Switch and Circuit Breaker

Controls power to all outlets. The switch is also a 15A breaker. When an overload occurs, it will automatically switch off. To resume operation, ensure the overload condition is removed and reset the surge protector by switching the unit ON.

2. Protected LED Indicator

Illuminated when the surge protection feature is working properly.

3. Standard Grounded Outlets (6)**4. Power Cord**

SPECIFICATIONS

Model Number:	B6032PK/B604/B604BK/ B608/B6012
Outlets:	Standard Grounded Outlets (6),
Power Cord Length:	B6032PK: 3 ft B604/B604BK: 4ft B608: 8 ft B6012: 12 ft
Surge Protection:	600 Joules
Electrical Rating:	125V/15A/1875W
UL Clamping Voltage:	UL1449 4th/800V(L-N)
Maximum Peak Current:	L-N 15,000 A
Response Time:	Less than 1 nanosecond
Circuit Breaker:	Resettable 15 Amp

⚠WARNING: This product can expose you to chemicals including vinyl chloride and bisphenol A (BPA), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

CAUTION

TO REDUCE THE RISK OF ELECTRIC SHOCK:

Use only in dry locations and only indoors.

DO NOT plug into another relocatable power tap.

DO NOT "daisy chain" surge protectors.

DO NOT use with any aquarium equipment.

DO NOT use if properly grounded outlets are not available.

DO NOT install this device if there is less than 10 meters (30 feet) of wire between the electrical outlet and electrical service panel.

DO NOT use for medical or life support equipment. This device features an internal protection that will disconnect the surge protective component at the end of its useful life, but it will maintain unprotected power to the load.

TROUBLESHOOTING

If the ON/OFF Reset Control switches to the OFF position, the 15-amp circuit breaker may have been tripped. Examine your connected equipment and remove the device overloading the circuit, causing the trip. Then, turn the ON/OFF Reset Control back to RESET.

If the PROTECTED indicator does not light, the surge protector's outlets are no longer protected from power surges or spikes. The surge protector may have received a power surge or spike beyond its specified limits that have overloaded the protection circuitry and rendered it inactive. The surge protector has protected your connected equipment as designed, but it will not protect against future surges and spikes. It should be replaced.

FOR MORE INFORMATION

Visit CyberPowerSystems.com for more information regarding:

- Product information and certifications
- Product warranty
- Connected equipment guarantee

TECHNICAL SUPPORT

Visit: CyberPowerSystems.com/support

Toll-Free: 1-877-297-6937

© 2025 Cyber Power Systems (USA), Inc. All rights reserved.

CyberPower and the CyberPower logo are trademarks of Cyber Power Systems, Inc., and/or affiliates, which are registered in many countries and regions. All other trademarks are the property of their respective owners.