



Thank you for your purchase. Questions, comments or feedback? We'd love to hear from you. Visit [feit.com/help](https://www.feit.com/help) for support.




Works with
Feit Electric App



Only supports
2.4GHz Wi-Fi
Networks

CAMERA DOORBELL

IMPORTANT SAFETY INSTRUCTIONS AND INSTALLATION GUIDE

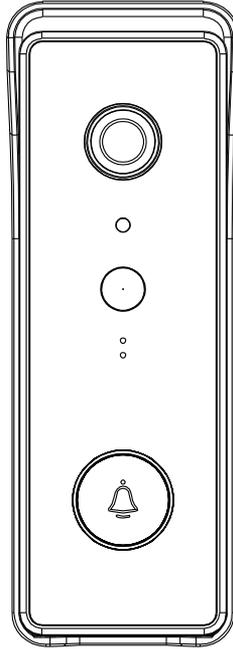

**READ BEFORE INSTALLATION.
SAVE THESE INSTRUCTIONS.**



Table of Contents

Safety Information	2	Unboxing	3
FCC Statement	2	Wireless Door Chime Installation	3
Warranty	2	USB Chime Setup	3
Pre-Assembly	3	App Setup	3
Description	3	Troubleshooting Tips	3

Safety Information

PLEASE READ BEFORE INSTALLING!

IMPORTANT SAFEGUARDS:

ALWAYS FOLLOW BASIC SAFETY PRECAUTIONS WHEN USING ELECTRICAL PRODUCTS.



CAUTION: This product is not user-serviceable. Do not attempt to open the product enclosure for any reason. Before installing your smart video doorbell, thoroughly review the enclosed installation guide. Operating temperature range is 32°F to 113°F (0°C to 45°C). This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and hazards involved.



NOTE: Intended for outdoor use. May be used indoors.



CAUTION: Contains 18650 Lithium Ion Batteries.



WARNING: This product may represent a possible shock or fire hazard if improperly installed or attached in any way. Product should be installed in accordance with the owner's manual, current electrical codes and/or the current National Electric Code (NEC).

Supplier's Declaration of Conformity: 47 CFR § 2.1077 Compliance Information
Responsible Party: Feit Electric Company, 4901 Gregg Road, Pico Rivera, CA 90660, USA
www.feit.com
Unique Identifier: CAM/DOOR/WIFI/BATG3

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement.
The device can be used in portable exposure condition without restriction.
The device can be used in mobile (min 7.87 in.) exposure condition without restriction.



Radiation Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment. This device should be installed and operated with a minimum distance of 20cm between the radiator and your body.

Limited Warranty



This product is warranted to be free from defects in workmanship and materials for up to 1 year from date of purchase. If the product fails within the warranty period, please visit feit.com/help for instructions on replacement/refund. REPLACEMENT OR REFUND IS YOUR SOLE REMEDY. EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTIES ARE LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IS HEREBY EXPRESSLY EXCLUDED. Some states and provinces do not allow the exclusion of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state or province to province.

TOOLS REQUIRED TO MOUNT CAMERA




NOTE: Hardware not shown to actual size.

HARDWARE INCLUDED



Part	Description	Quantity
AA	Camera Doorbell	1
BB	Mounting Bracket	1
CC	USB-A Chime	1
DD	18650 2200mAh batteries	2
EE	Mounting Screws	2
FF	Mounting Anchors	2
GG	Small Bracket Locking Screws	2
HH	Hex Key	1
II	USB-C Charging Cable	1

Description

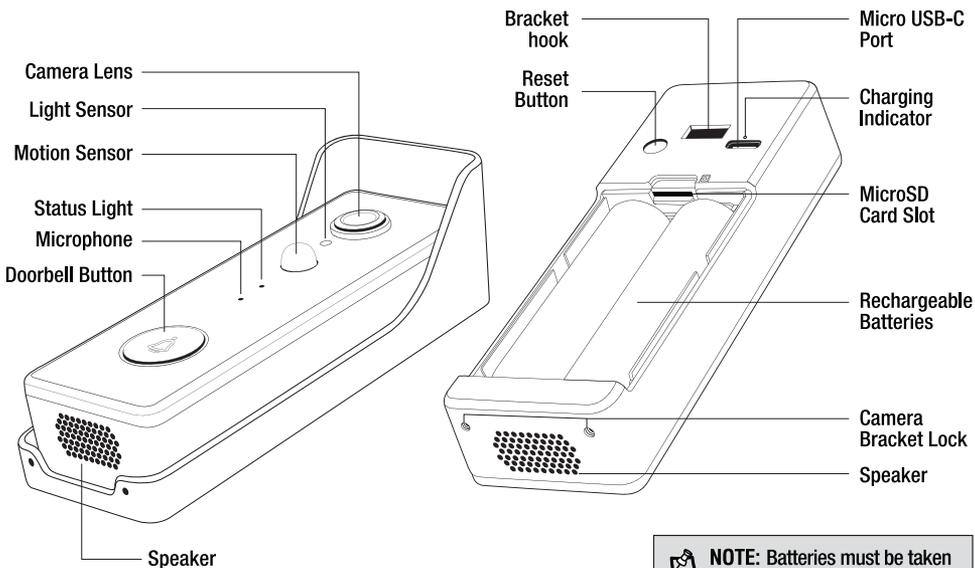


 **NOTE:** Batteries must be taken out before installing the SD card.

Item	Description
Doorbell Button	Press to activate the doorbell.
Status Light	<ul style="list-style-type: none"> • Blinking red = Pairing Mode • Solid red = Rebooting • Blinking blue = Connecting to Wi-Fi • Solid blue = Connected to Wi-Fi
SD Card Slot	Use up to a 128GB MicroSD card to enable recording (sold separately). Only supports MicroSD card with FAT32 format.
Reset Button	Push the reset button found on the back of the doorbell or until you hear an audible tone.
USB-C Power	5VDC, Max. 1A
Charging LED Indicator	<ul style="list-style-type: none"> • Solid red: Battery is charging. • No light: Charging is Complete.
Battery Capacity	4400mAh (contains two 18650 replaceable lithium-ion batteries).
Charging/ Discharging Time	10 hours to fully charge. Can last up to 35 days. (Based on 10 motion triggers per day)


1 Removing the Camera Doorbell

Remove the Camera Doorbell (AA) from the mounting bracket (BB).



2 Connecting to the USB Port

Charge the unit fully using the supplied USB-C cord (II) and power adapter. The charging indicator light will turn red when charging then turn off when fully charged.

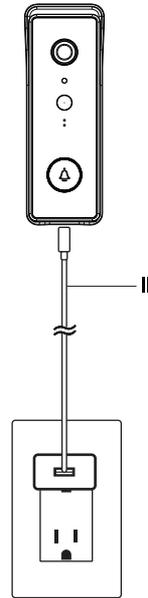


3 Inserting MicroSD card

Remove the back cover plate and rechargeable batteries to insert a 128 GB MicroSD card (sold separately).




NOTE: Can store up to 10 days of continuous recording on a 128 GB MicroSD card (sold separately). Storage duration will vary based on video quality settings.

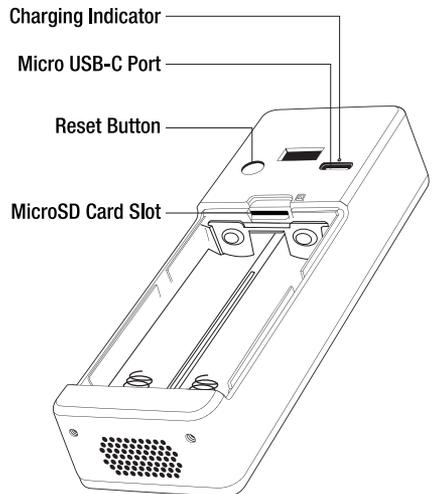


1 Pre-installation

Remove the mounting bracket (BB) from the Camera Doorbell (AA).

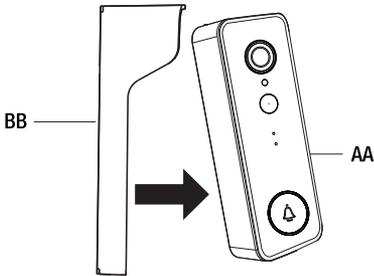


2 Position Mounting Bracket

Mark screw positions using the mounting bracket (BB) on your wall.




3 Installing Anchors

Drill 1/4 inch holes at the marked points if installing on a hard surface such as concrete or brick. Insert mounting anchors (FF) into holes. You can skip this step if installing on wood, siding or attaching with tape.




4 Attaching the Mounting Bracket

Use the mounting screws (EE) to attach the mounting bracket (BB) to the wall.




5 Placing the Doorbell into the Mounting Bracket

Insert the Camera Doorbell (AA) into the mounting bracket (BB). Recharge as required.

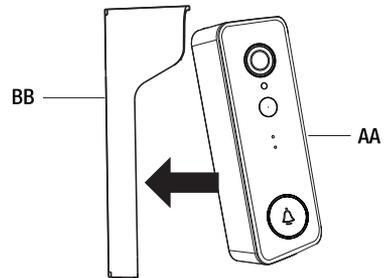

6 Securing the Doorbell to the Mounting Bracket

Use the supplied hex shaped key (HH) and hex shaped screws (GG) to secure the Camera Doorbell (AA) to the mounting bracket (BB).




 **NOTE:** Refer to Page 7 for app setup.

1 Supply Power

Supply power to your Wireless Chime (CC) with the USB power adapter near the Camera Doorbell. You can relocate it after pairing the device.




NOTE: The USB power adapter is not included.

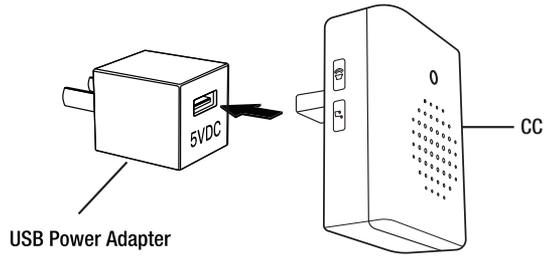



2 Confirm Status Light

Wait for the Status Light to blink twice then turn off.

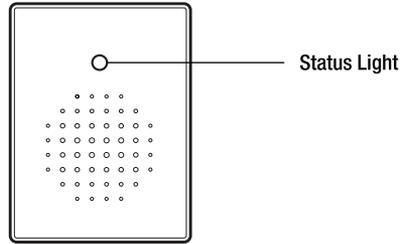

3 Pair with Camera Doorbell

Press and hold the volume button until the light indicator blinks quickly, then release the button and press the doorbell button on the front of the camera.





4 Complete Setup

Press it again to make sure it rings. You are now paired.



NOTE: Tapping on the Ring Tone Selection button cycles through all 20 tones. It will play by default once you have stopped cycling.



Download and install the Feit Electric app

- Search for the Feit Electric app in the App Store or Google Play Store.
- Download and install the Feit Electric app on your smart device.



Feit Electric
App



Set up the Camera Doorbell using the Feit Electric App

- Check to be sure the Camera Doorbell is in pairing mode. The red status light must be blinking rapidly to connect. If the light is not blinking, press and hold the reset button for five seconds (until you hear an audible tone). Use the Feit Electric App to complete the setup.
- Follow the directions in the Feit Electric App to pair your device using the QR code.
- You can find more pairing methods in the drop-down menu on the device setup page.

Be sure to connect to a 2.4 GHz Wi-Fi network that covers your installation location.



Need Help?

Thank you for your purchase.
Questions, comments or feedback?
We'd love to hear from you.
Visit feit.com/help for support
or connect with us:



@FeitElectric



@FeitElectricInc



feitelectriclighting

PROBLEM	CORRECTIVE ACTION
Doorbell will not power up	<ul style="list-style-type: none"> • Ensure the battery is fully charged by connecting the unit with the included cable. • Remove batteries and insert them again to ensure they are properly placed.
Doorbell will not connect to my Wi-Fi network	<ul style="list-style-type: none"> • Make sure the LED is blinking RED. If the LED is not blinking red, press and hold reset button on the back for five seconds or until you hear an audible tone. • Make sure the Wi-Fi network is a 2.4GHz network. Device will not connect to a 5GHz network. • Test your Wi-Fi network with other devices such as your phone or computer to make sure it is operating properly. • The Wi-Fi connection may be out of range during pairing. Use your phone to check the Wi-Fi signal strength, it is recommended to have at least two signal bars showing for proper connection. • Your Wi-Fi network password is case sensitive, make sure you are entering it correctly.
The doorbell is offline	<ul style="list-style-type: none"> • There could be a temporary issue with your internet connection (e.g., service disruption). Please try again in a few minutes. • Make sure your Wi-Fi router is turned on. • Make sure the doorbell is getting a good signal from your Wi-Fi router. Use your phone to check the Wi-Fi signal strength (at least two signal bars is recommended for reliable connection). • The doorbell may have been disconnected from your Wi-Fi network. Press and hold the reset button until you see a blinking red LED and hear an audible tone. Follow directions in the app setup section of the manual to re-connect the doorbell to your Wi-Fi network.
What do the blinking LEDs mean?	<ul style="list-style-type: none"> • Blinking RED = Pairing Mode • Solid RED = Rebooting • Blinking BLUE = Connecting to Wi-Fi • Solid BLUE = Connected to Wi-Fi
Live video stream is slow to load	<p>Doorbell streaming issues may be caused by any of the following:</p> <ul style="list-style-type: none"> • Your phone's cellular connection, which relies on mobile coverage. • Limited internet bandwidth at home. For example, other video streaming services running at the same time on your network can cause congestion slowing down the internet upload and download speeds. • Wi-Fi reception may not be stable or work reliably if the doorbell's Wi-Fi signal strength is less than two signal bars. You may need to install a Wi-Fi repeater or extender to boost the Wi-Fi signal.
How do I reset the doorbell to re-enter pairing mode?	<ul style="list-style-type: none"> • Press and hold the reset button found on the back of the device, until you see a blinking red LED and hear an audible tone.
The doorbell is not recording	<ul style="list-style-type: none"> • Under Advanced Settings, make sure motion Detection is set to Low, Middle or High. • Make sure that the MicroSD card is installed correctly. To confirm that the doorbell is recognizing the MicroSD card, go to the settings menu in the Feit Electric App. Then, go to the SD Card Settings menu and make sure the MicroSD card capacity menu shows total, used, and free space. If this does not appear, consider reformatting the MicroSD card. <p>WARNING: Reformatting MicroSD card will delete all videos stored on card. Please go through the troubleshooting section before doing so or contact our Customer Support Team.</p>
How can I check the available space on the MicroSD Card?	<ul style="list-style-type: none"> • In the settings menu under SD Card Settings, you will see Used Space and Free Space. Note: Doorbell only supports 128GB or less MicroSD cards with FAT32 format. (MicroSD card NOT INCLUDED.)
What happens when the MicroSD card reaches full capacity?	<ul style="list-style-type: none"> • Once the MicroSD card reaches full capacity, new videos will start rewriting (deleting) over the oldest videos.
Can I use a new MicroSD card if I do not want to record over existing videos?	<ul style="list-style-type: none"> • Yes, you can use a new MicroSD card if you do not want to record over existing videos. Remove the existing MicroSD card from the back of the doorbell and replace a new one not exceeding 128GB capacity. Once this is completed, format the new MicroSD card by going to the SD Card Settings and pressing Format SD Card, then Confirm. <div data-bbox="344 1344 938 1409" style="border: 1px solid black; padding: 5px;"> <p> WARNING: Reformatting the MicroSD card will delete all videos stored on the card. Please review the troubleshooting section before proceeding or contact our Customer Support Team.</p> </div>