


8 Aligning the Fixture


- Once desired color is selected tuck all supply wires into the junction box neatly to create enough space for the wired enclosure to fit properly without obstruction.
- Align the marked arrows on the top side of the fixture with the arrows (EE) placed on the ceiling so that the outer edge of the fixture (AA) is between both arrows on the ceiling and ensure the tabs of the fixture line up with open slots of the mounting bracket (BB).

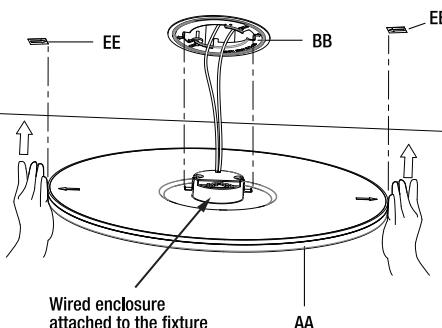

After Installation Operating Fixture


Selecting Modes

- Flip the wall switch ON to enter the Mode 1: Main Light.
- Flip the wall switch OFF and back ON again in less than 2 seconds to enter Mode 2: Night Light.

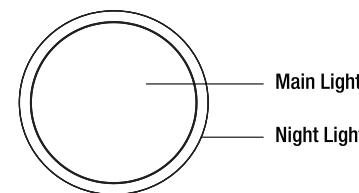

*Wire Gauge and Strip Length Requirements

Wire Type	Wire Range	Strip Length
Solid wire	24-12 AWG	0.43 - 0.50 in.
Tin bonded stranded wire	22-14 AWG	0.43 - 0.50 in.



 NOTE: If the jacket of the cable is not in the push-in wire connector ensure the strip length is correct and/or verify the wire is fully inserted.



Thank you for your purchase.
Questions, comments or feedback?
We'd love to hear from you.

Visit feit.com/help
for support or connect with us:



@FeitElectric



@FeitElectricInc




feitelectriclighting

Need Help?

9 Securing the Fixture

- Turn clockwise to secure the fixture (AA) on to the mounting bracket (BB).
- Remove the two labels with arrows from the ceiling.

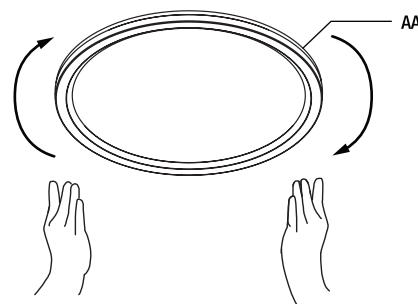

10 Turning On the Power

- Turn on the fusebox or circuit breaker and the power at the wall switch.



15 INCH ROUND CEILING FIXTURE

CHOOSE YOUR SHADE OF WHITE

IMPORTANT SAFETY INSTRUCTIONS AND INSTALLATION GUIDE

IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY

Safety Information

For your safety, always remember to:

- Turn off the power supply at the fuse or circuit breaker box before you install the fixture.
- The grounding conductor shall be properly connected to the branch circuit ground to avoid potential electrical shock.
- Double-check all connections to be sure they are tight and correct.
- Wear rubber soled shoes and work on a sturdy wooden ladder.
- Account for small parts and destroy packing material, as these may be hazardous to children.

This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.



CAUTION: Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.



CAUTION: Consult a certified electrician to ensure correct branch circuit conductor.



WARNING: RISK OF SHOCK. House electric current can cause painful shock or serious injury unless handled properly.

Product Specifications

- 120VAC, 60Hz, 23W
- Dimmable with standard LED dimmer
- Suitable for Damp Locations



CAUTION: RISK OF FIRE. Before installing your lighting fixture, thoroughly review this installation manual. If you do not have sufficient electrical wiring experience have your fixture installed by a certified electrician. Reliable operating temperature is -13°F to 113°F / -25°C to 45°C. Suitable for Damp Locations. This fixture may not be compatible with all dimmers. For more information including dimmer compatibility visit www.feit.com.

NOTICE: All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a certified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

FCC STATEMENT

Supplier's Declaration of Conformity: 47 CFR § 2.1077 Compliance Information

Responsible Party: Feit Electric Company, 4901 Gregg Road, Pico Rivera, CA 90660, USA, www.feit.com

Unique Identifier: FP15RND/5CCT/NL, ITM. / ART. 1938000

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

Limited Warranty

This product is warranted to be free from defects in workmanship and materials for up to 3 years from date of purchase. If the product fails within the warranty period, please contact Feit Electric at info@feit.com, visit feit.com/contact-us or call 1-866-326-BULB (2852) for instructions on replacement or refund. **REPLACEMENT OR REFUND IS YOUR SOLE REMEDY, EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW. ANY IMPLIED WARRANTIES ARE LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IS HEREBY EXPRESSLY EXCLUDED.** Some states and provinces do not allow the exclusion of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state or province to province.

Pre-Installation

TOOLS REQUIRED (NOT INCLUDED)



Phillips
Screwdriver



Measuring
Tape

NOTE: Hardware not shown to actual size.

HARDWARE INCLUDED




Part	Description	Quantity
AA	Fixture	1
BB	Mounting Bracket	1
CC	Junction Box Mounting Screws #8-32 x 1 in.	2
DD	Push-In Wire Connectors	3
EE	Arrow Labels	2

Color Settings



NOTE: Preselected color is Bright White (3000K).

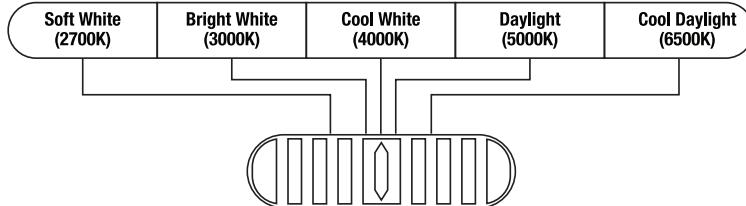

1. When the slide switch is set to 2700K, the color temperature is set to Soft White.
2. When the slide switch is set to 3000K, the color temperature is set to Bright White.
3. When the slide switch is set to 4000K, the color temperature is set to Cool White.
4. When the slide switch is set to 5000K, the color temperature is set to Daylight.
5. When the slide switch is set to 6500K, the color temperature is set to Cool Daylight.

Installation


1 Turning Off the Power

- Turn the power OFF at the switch and fusebox or the circuit breaker.



2 Identifying the Wires

Black - Hot/Live
White - Neutral
Green or Bare Copper - Ground





Installation (continued)

3 Installing the Mounting Bracket to the Junction Box


- Use the Push-In Wire Connector (DD) to connect the ground wire (green) attached to the mounting bracket (BB) to the house ground wire (bare or green).
- Feed the junction box wires through the center of the mounting bracket (BB).
- Attach the mounting bracket (BB) to the junction box using the two junction box mounting screws (CC).

NOTE: The marking on the mounting bracket "THIS SIDE FACE DOWN" should be facing downward away from the junction box.

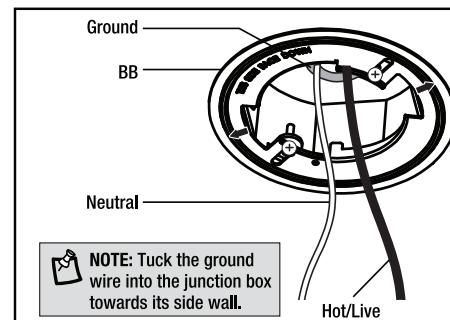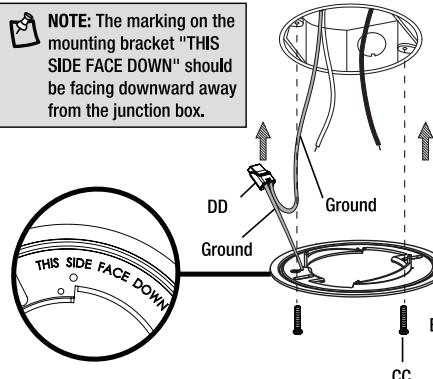

4 Arrow Placement


- Align a tape measure with the arrows marked on the mounting bracket (BB).
- Place one arrow label (EE) on each side of the mounting bracket (BB), approximately 7 3/4 inches from the center of the bracket. Ensure that each label's arrow points toward the arrows marked on the bracket.

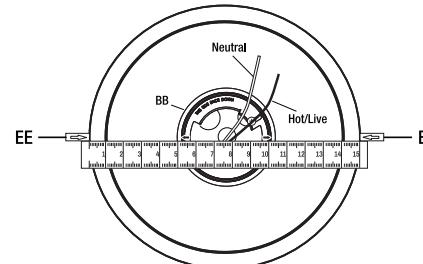

5 Connecting the Wires

- Use a Push-In Wire Connector (DD) to connect the black live wire coming out of the fixture (AA) to the live wire (usually black) coming from the junction box.
- Use a Push-In Wire Connector (DD) to connect the white neutral wire coming out of the fixture (AA) to the neutral wire (usually white) coming from the junction box.

NOTE: Wires inserted into the Push-In Wire Connectors must meet the *Wire Gauge and Strip Length Requirements. See page 4.



6 Checking the Connections

- After inserting the supply wires into the Push-In Wire Connectors (DD), double check the connection by following these simple tests:
- Hold the Push-In Wire Connector (DD) with one hand and with the other hand pull at the connected wires to ensure proper wire connection.
- Ensure a sufficient amount of wire is visible through the clear shell for visual verification.

7 Selecting the Color (CCT)

- Select the desired color (CCT) by sliding the switch located on the back of the fixture. See page 2 for color settings.

