


8-OUTLET SURGE PROTECTOR (6 AC OUTLETS & 2 USB PORTS)

P604URC1

USER MANUAL

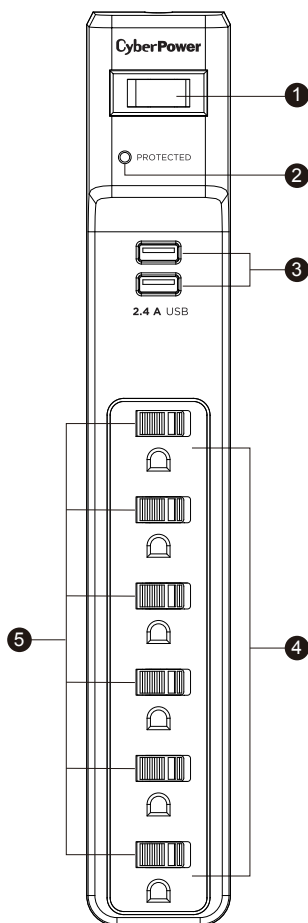

FEATURES

1. ON/OFF Reset Lighted Switch Breaker

Controls power to all outlets. The switch is also a 15A breaker. When an overload occurs, it will automatically switch off. To resume operation, ensure the overload condition is corrected and reset the surge protector by switching the unit ON.

2. Surge Protected Indicator

Illuminated when the surge protection is working properly.

3. USB Charging Ports*

Connect and charge up to two (2) USB devices using the surge protected USB charging ports.

*USB outlets cannot be used as a USB hub. This device does not transfer data.

4. Six Standard Outlets

5. Safety Covers

All AC outlets on this surge protector include safety covers. To ensure the safety of children and to avoid electric shock and damage from a high-dust environment, slide the plastic outlet cover closed on outlets that are not used.

SPECIFICATIONS

Model Number:	P604URC1
Outlets:	6 Standard Outlets, 2 USB Charger Ports
Surge Protection:	500 Joules
Electrical Rating:	125V / 15A / 1875W
USB Charger Rating:	5V / 2.4A total
UL Clamping Voltage:	UL 1449 3rd / 800V (L-N)
Maximum Peak Current:	15,000A
AC Lines Protected:	L-N: 800A
Response Time:	Less than 1 nanosecond
Circuit Breaker:	Resettable 15 Amp

⚠WARNING: This product can expose you to chemicals including bisphenol A (BPA) and styrene (ABS), which is known to the State of California to cause reproductive harm and cancer. For more information, go to www.P65Warnings.ca.gov.

CAUTION

TO REDUCE THE RISK OF ELECTRIC SHOCK:

Use only in dry locations and only indoors.

DO NOT plug into another relocatable power tap.

DO NOT "daisy chain" surge protectors.

DO NOT use with any aquarium equipment.

DO NOT use if properly grounded outlets are not available.

DO NOT install this device if there is less than 10 meters (30 feet) of wire between the electrical outlet and electrical service panel.

DO NOT use for medical or life support equipment. This device features an internal protection that will disconnect the surge protective component at the end of its useful life, but it will maintain unprotected power to the load.

FOR MORE INFORMATION

Visit CyberPowerSystems.com for more information regarding:

- Product information and certifications
- Product warranty
- Connected equipment guarantee

TROUBLESHOOTING

If the ON/OFF is switched OFF, the 15 AMP circuit breaker may have tripped. Examine your connected equipment and remove the device that is overloading the circuit. Then, turn the ON/OFF switch back to RESET.

If the Protected indicator does not light, the surge protector's AC line is no longer protected from a surge. Replace the surge protector. The surge protector may have received a power surge or spike beyond its specified limits that overloaded the protection circuitry and rendered it inactive. The surge protector has protected your connected equipment but it will not protect against future surges and spikes.

TECHNICAL SUPPORT

Visit: CyberPowerSystems.com/support

Toll-Free: 1-877-297-6937

© 2024 Cyber Power Systems (USA), Inc. All rights reserved.
All other trademarks are the property of their respective owners.



CONFORMANCE APPROVALS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against

harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Cyber Power Systems (USA), Inc.

4241 12th Avenue East, Suite 400 | Shakopee, MN 55379

CyberPowerSystems.com