


6-OUTLET SURGE PROTECTOR WITH NIGHT-LIGHT (6 AC & 3 USB PORTS)

P6WUCL

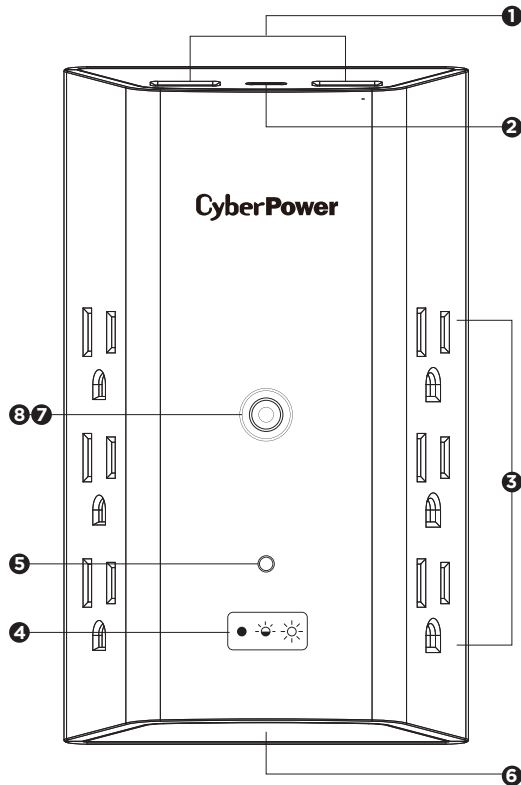

FEATURES

1. USB-A Charging Ports (2)
2. USB-C Charging Port (1)
3. Standard Grounded Outlets (6)
4. Night-Light Brightness Touch Control
5. Night-Light Photo Sensor
6. Night-Light
7. Mounting Screw Hole
8. Screw Hole Cap

SPECIFICATIONS

Model Number:	P6WUCL
Outlets:	Standard Grounded Outlets (6), USB-A Charging Ports (2), USB-C Charging Port (1)
Surge Protection:	900 Joules
USB Charging Output:	USB-A 2.4 A Shared, USB-C 18 W PD
Electrical Rating:	125 V/15 A/60 Hz/1875 W
UL Clamping Voltage:	UL1449 4th/800 V (L-N, L-G, N-G)
Maximum Peak Current:	24000A
3 AC Lines Protected:	L-N: 800 A ; L-G: 800 A ; N-G: 800 A
Response Time:	Less than 1 nanosecond
Night-Light Settings:	Off / Low / High

⚠ WARNING: This product can expose you to chemicals including bisphenol A (BPA) and styrene (ABS), which is known to the State of California to cause reproductive harm and cancer. For more information, go to www.P65Warnings.ca.gov.

CAUTION

TO REDUCE THE RISK OF ELECTRIC SHOCK:

Use only in dry locations and only indoors.

DO NOT plug into another relocatable power tap.

DO NOT "daisy chain" surge protectors.

DO NOT use with any aquarium equipment.

DO NOT use if properly grounded outlets are not available.

DO NOT install this device if there is less than 10 meters (30 feet) of wire between the electrical outlet and electrical service panel.

DO NOT use for medical or life support equipment. This device features an internal protection that will disconnect the surge protective component at the end of its useful life, but it will maintain unprotected power to the load.

NIGHT-LIGHT CONTROL

Photo sensor turns night-light on and off automatically.

3 stage night-light settings: Off / Low / High.

The default setting of the night-light is High.

Touch the control panel to cycle the night-light brightness from Off to Low to High.

FOR MORE INFORMATION

Visit CyberPowerSystems.com for more information regarding:

- Product information and certifications
- Product warranty
- Connected equipment guarantee

TECHNICAL SUPPORT

Visit: CyberPowerSystems.com/support

Toll-Free: 1-877-297-6937

© 2024 Cyber Power Systems (USA), Inc. All rights reserved.
All other trademarks are the property of their respective owners.



CONFORMANCE APPROVALS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against

harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Cyber Power Systems (USA), Inc.

4241 12th Avenue East, Suite 400 | Shakopee, MN 55379

CyberPowerSystems.com