



BP192VL2U01 EXTENDED BATTERY MODULE



Extend battery runtime for UPS systems during power outages.

The CyberPower BP192VL2U01 rack/tower convertible Extended Battery Module (EBM) extends battery runtimes during power outages and is designed for CyberPower UPS systems OL8KRTHD and OL10KRTHD.

The BP192VL2U01 takes 2U of rack space and can be installed in a rack or tower configuration to match the UPS form factor. Battery equalization technology improves battery life, and toolless front panel removal makes battery replacement easier. This unit comes with a three-year warranty.

COMPATIBLE APPLICATIONS

- OL8KRTHD UPS Systems
- OL10KRTHD UPS Systems

FEATURES


- Typical Recharge Time (0 to 90%): 4 hours
- Battery Type & Quantity: 12V / 5.7 Ah (16)
- Form factor: Rack/Tower
- Hot-swappable: Yes
- Battery Equalization Technology: Yes
- Smart Battery Management: Yes
- Fast Charge Technology: Yes
- Warranty: Three-year

SPECIFICATIONS

GENERAL	
Amperage	60 A
DC Voltage	192 VDC
BATTERY	
Battery Quantity	16
Battery Size	12 V / 5.7 Ah
Battery Type	Sealed Lead-Acid
Built-in Charger	Yes
Expansion Ready (Daisy-Chain)	Yes
Field-Serviceable Battery	Replaceable by qualified technician
Hot-Swappable	Yes
Replacement Battery	RB1260X8A (1) (Left) + RB1260X8B (1) (Right)
Typical Recharge Time	4 Hours (0% to 90% charged)

PHYSICAL	
Chassis Color	Unpainted
Form Factors	Rack / Tower
Front Panel Color	Black
Material of Construction	Metal
Mounting Hardware	Yes
ENVIRONMENTAL	
Operating Elevation	0 to 10,000 ft (0 to 3,048 m)
Operating Relative Humidity	0 to 90 % (non-condensing)
Operating Temperature	32 to 104 °F (0 to 40 °C)
Storage Elevation	0 to 50,000 ft (0 to 15,239 m)
Storage Relative Humidity	0 to 95 % (non-condensing)
Storage Temperature	-4 to 113 °F (-20 to 45 °C)

BP192VL2U01 EXTENDED BATTERY MODULE

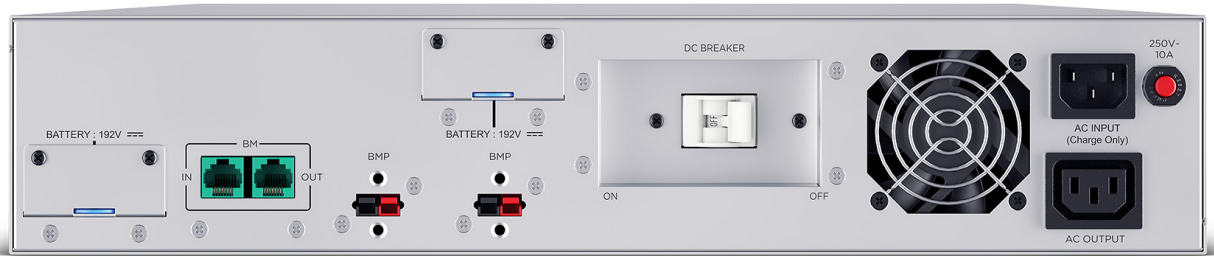

SPECIFICATIONS - CONTINUED

PHYSICAL DIMENSIONS

Physical Dimensions - Width/Height/Depth (cm) 43.31 x 8.64 x 71.88 cm

Physical Dimensions - Width/Height/Depth (mm) 433 x 86 x 719 mm

Physical Dimensions - Width/Height/Depth (in.) 17.05 x 3.4 x 28.3 in.

Weight (kg) 45.99 kg

Weight (lbs.) 101.40 lbs.

SHIPPING DIMENSIONS

Shipping Dimensions - Width/Height/Depth (cm) 59.79 x 21.31 x 109.8 cm

Shipping Dimensions - Width/Height/Depth (mm) 597.92 x 213.11 x 1098.04 mm

Shipping Dimensions - Width/Height/Depth (in.) 23.54 x 8.39 x 42.23 in.

Shipping Weight (kg) 54.11 kg

Shipping Weight (lbs.) 119.30 lbs.

CERTIFICATIONS

Environmental RoHS Compliant

Safety UL1778
CSA C22.2 No.107.3
FCC Part 15 Class A

WARRANTY

Extended Warranty Option WEXT5YR-BP5

Product Warranty Three-Year Limited