


PART#: 16/4 k5501

PART#: k5501 DESCRIPTION: 4C/16 AWG 65 STRAND OXYGEN FREE COPPER
SPEAKER CABLE,PVC JKT

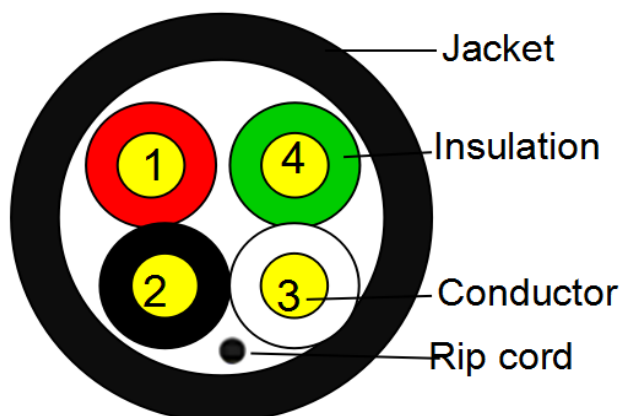

Regulatory

UL : UL 444 & UL 13,Type (UL) CMR/CL2R c(UL)

EU RoHS 2011/65/EU Compliant

EN50575: 2014 REACTION TO FIRE CLASS Eca

Application: Speaker cable

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	16AWG X 4C(2.11mm ²)
	Construction	65/0.16mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.30mm
	AVG.Thickness	0.33mm
	Diameter	2.0mm +/-0.10mm
	Colors	Black & Red & Green & White
Jacket	Material	PVC
	Min.Thickness	0.54mm
	AVG.Thickness	0.60mm
	Diameter	6.1mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius	Min 15D/95mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Conductor Resistance	Max 15.5 ohm/km at 20°C

Insulation Resistance		Min 50MΩ*km at 20°C	
Dielectric Strength		Min AC1.5KV	
Rated Voltage		Max 80Volts	
Marking:			
Packaging:			
Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
11.8kgs/26.014lbs	320X260X320	500ft/ Box	36