

## DS-2CE57H0T-VPIT 5 MP Outdoor Analog Dome Camera

### TurboHD™



- 5 MP (2560 x 1944) Resolution
- 2.8 mm, 3.6 mm, or 6 mm Lens
- Smart IR, 66 ft (20 m) Range
- 4-in-1 Video Output (Switchable TVI/AHD/CVI/CVBS)
- IP67, IK10

The Hikvision DS-2CE57H0T-VPITF 5 MP Outdoor Dome Camera provides high-definition analog output with a resolution of up to 2560 x 1944 pixels. TurboHD means that the analog signal can be sent over existing coaxial cable, eliminating the need to run new cables for high-definition video.

EXIR 2.0 is Hikvision's proprietary IR extended range technology, which has a range of 66 ft (20 m).

The 2.8 mm, 3.6 mm, and 6 mm fixed lens options are optimized for viewing angles that fit any situation. DWDR (Digital Wide Dynamic Range) ensures that ideal images are captured regardless of the lighting conditions. The camera also supports TVI, AHD, CVI, and CVBS video signals and is water, dust, and impact resistant (IP67 and IK10 rated).


**Available Models:**  
DS-2CE57H0T-VPITF



# Specifications

DS-2CE57HOT-VPITF	
<b>Camera</b>	
Image Sensor	5 MP CMOS
Signal System	PAL/NTSC
Resolution	2560 (H) × 1944 (V)
Frame Rate	5 MP @ 20 fps
	4 MP @ 30 fps
	TVI 4 MP @ 25 fps
	1080p @ 30 fps
	1080p @ 25 fps
	AHD 5 MP @ 20 fps
	4 MP @ 30 fps
	4 MP @ 25 fps
	CVI 4 MP @ 30 fps
	4 MP @ 25 fps
	CVBS PAL/NTSC
Minimum Illumination	0.01 lux @ (f/1.2, AGC on), 0 lux with IR
Shutter Speed	PAL 1/25 s to 1/50,000 s
	NTSC 1/30 s to 1/50,000 s
Field of View	Lens 2.8 mm, 3.6 mm, or 6 mm fixed lens
	Horizontal FOV: 85°
	2.8 mm Vertical FOV: 63°
	Diagonal FOV: 110°
	Horizontal FOV: 80°
	3.6 mm Vertical FOV: 63°
Diagonal FOV: 105°	
	Horizontal FOV: 57°
	6 mm Vertical FOV: 43°
	Diagonal FOV: 72°
Lens Mount	M12
Day/Night	ICR
WDR (Wide Dynamic Range)	Digital WDR
Angle Adjustment	Pan: 0 to 355°, tilt: 0 to 75°, rotation: 0 to 355°
<b>Menu</b>	
Image Mode	STD/HIGH-SAT
AGC	Yes
Day/Night Mode	Auto/color/BW (black and white)
White Balance	Auto/manual
AE (Auto Exposure) Mode	DWDR/BLC/HLC/Global
Noise Reduction	2D DNR
Language	English
Function	Brightness, sharpness, mirror, Smart IR
<b>Interface</b>	
Video Output	Switchable TVI/AHD/CVI/CVBS
<b>General</b>	
Operating Conditions	-40° to 140° F (-40° to 60° C), humidity 90% or less (non-condensing)
Power Supply	12 VDC ±25%
Power Consumption	Maximum 4.3 W
Protection Level	IP67, IK10
Material	Metal
IR Range	Up to 66 ft (20 m) range
Communication	HIKVISION-C
Dimensions	Ø4" × 3.2" (Ø100.4 mm × 82.4 mm)
Weight	Approximately 0.80 lb (362 g)

## Dimensions

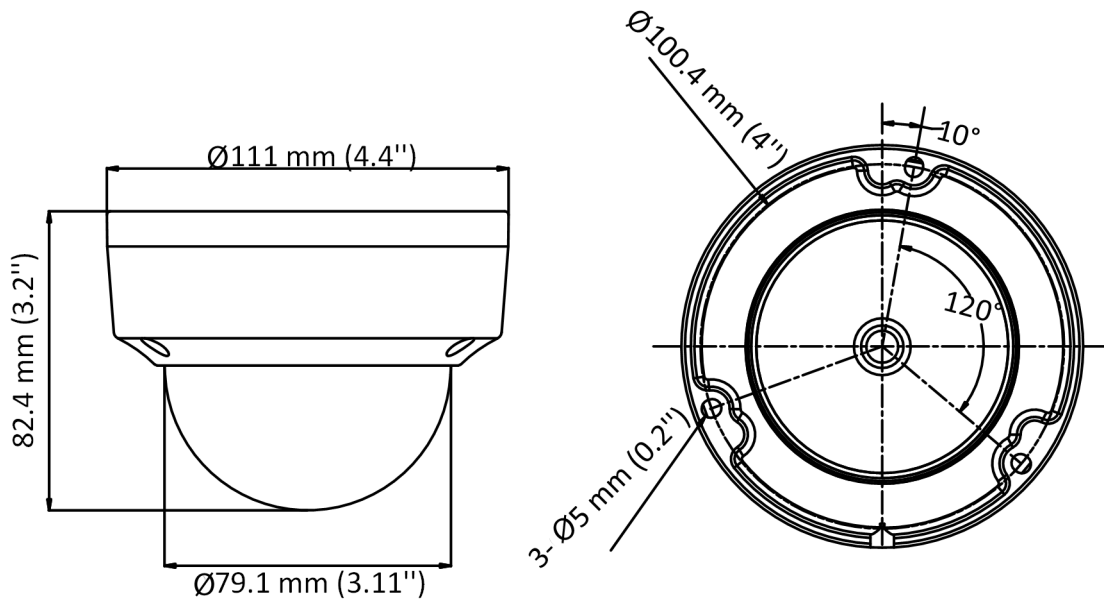

## Accessories

NOT INCLUDED				
				
<b>CPM</b> Ceiling Pendant Mount	<b>WMS</b> Wall Mount Short	<b>PC110</b> 110 mm Pendant Cap	<b>PM</b> Pole Mount Adaptor	<b>WM110</b> Plastic Wall Mount
				
<b>CB110</b> Conduit Box	<b>AB110</b> Angled Base	<b>CM</b> Corner Mount Adapter		