



FIGURE

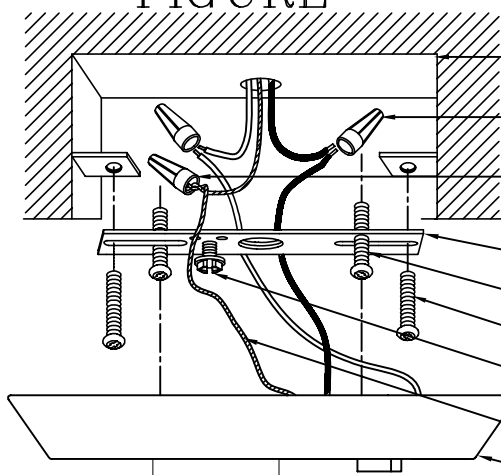


- ① OUTLET BOX IN THE BUILDING
- ⑥ WIRE CONNECTORS (OPTIONAL) 2pcs
- ⑪ WIRE CONNECTOR 1PC (FOR GROUND WIRE)
- ② CROSSBAR 1PC
- ④ LONG SCREWS 2pcs
- ③ SHORT SCREWS 2pcs
- ⑩ GREEN SCREW 1PC (OPTIONAL)
- ⑤ FIXTURE GROUND WIRE
- ⑦ FIXTURE
- ⑨ SHADE

FIGURE

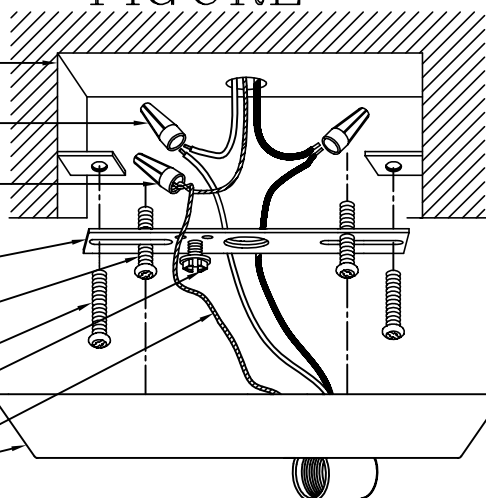


→ REVOLVING ON DIRECTION

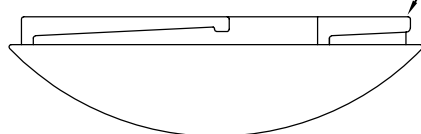

← TAKING OFF DIRECTION



NOTE: THE APPEARANCE OF FIXTURE AND QUANTITY OF SOCKET(S) IS SUBJECT TO THE ACTUAL FIXTURE YOU RECEIVED, WHICH IS DIFFERENT FROM THE FIGURE IN THIS INSTRUCTION SHEET, BUT IN SAME INSTALLING WAY AS BELOW.

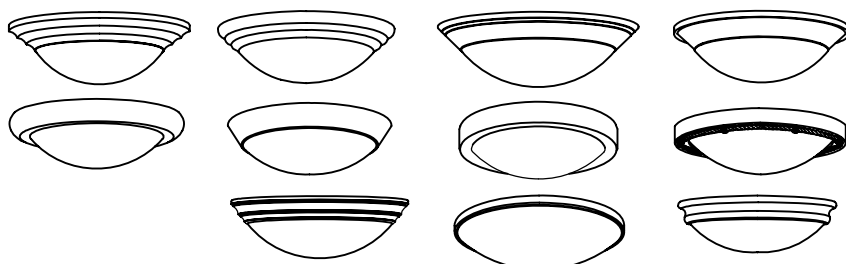

(3) INSTALLING WAY:

- ① OUTLET BOX IN THE BUILDING
- ② CROSSBAR 1PC
- ③ SHORT SCREWS 2PCS : FASTEN ② CROSSBAR TO ① OUTLET BOX WITH ③ SHORT SCREWS .
- ④ LONG SCREWS 2PCS : SCREW INTO THE SCREW HOLES OF ② CROSSBAR TO SECURE ⑦ FIXTURE .
- ⑤ FIXTURE GROUND WIRE : TWIST ⑤ FIXTURE GROUND WIRE AND GROUND WIRE FROM OUTLET BOX, FIX THEM WITH ⑪ WIRE CONNECTOR (PROVIDED).
- ⑥ WIRE CONNECTORS 2PCS(OPTIONAL): CONNECT FIXTURE WIRES WITH SUPPLY WIRES TOGETHER.
- ⑦ FIXTURE: ALLOWING ④ LONG SCREWS HEADS TO PROTRUDE THROUGH LARGE KEYHOLE SLOTS ON ⑦ FIXTURE, ROTATE ⑦ FIXTURE, TO MAKE THE SCREW HEADS OVER NARROW PARTS OF KEYHOLE SLOTS AND SECURE ⑦ FIXTURE AGAINST CEILING OR THE WALL BY TIGHTENING ④ LONG SCREWS USING TOOLING.
- ⑧ TURN ON ELECTRICITY AFTER ASSEMBLING THE BULBS, TO TEST IF THE ELECTRICITY CAN WORK NORMALLY. (MAKE SURE THE BULBS CAN WORK.)
- ⑨ SHADE: PUT NECK OF ⑨ SHADE IN PLACE BY INSERTING DIMPLES LOCATED IN ⑦ FIXTURE, REVOLVE ⑨ SHADE CLOCKWISE GENTLY & SLOWLY UNTIL IT CAN NOT BE REVOLVED ANY MORE. BUT DO NOT REVOLVE SHADE WITH STRONG FORCE AND TOO FAST TO AVOID OVER TIGHTNESS OF SHADE AND CAUSE DIFFICULTY WHEN TAKING OFF SHADE IN THE FUTURE. REVOLVE SHADE BY OPPOSITE DIRECTION WHEN TAKING OFF SHADE. TAKE CARE WHEN ASSEMBLING OR DISASSEMBLING ⑨ SHADE TO AVOID BREAKAGE OF ⑨ SHADE .

READ AND SAVE THIS INSTRUCTION SHEET

(1) ATTENTION


- 1.1 To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.
- 1.2 All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code. If you are unfamiliar with the methods of installing electrical wiring, secure the services of a qualified licensed electrician.
- 1.3 These fixtures are intended to be building mounted and must be supported by the building structure.
- 1.4 Do not operate the lighting fixture close to any combustible material.
- 1.5 Ensure that the fitting is cool and switched off before changing the bulb.
- 1.6 Do not use bulbs exceeding maximum wattage as marked on lighting fixture.

(2) CAUTION BEFORE INSTALLATION

- 2.1 Prepare tools and materials required, e.g.: Ladder, Wrench, Wire cutter, Screw driver, Bulbs and Wiring supplies as required by electrical code.
- 2.2 Before starting the installation, disconnect the power by opening the circuit breaker or by removing the fuse at the fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.
- 2.3 If you are replacing an existing fixture, disconnect and remove the old fixture. Expose the supply wiring.
- 2.4 No rough or sharp edges are in contact with any of the wire, to ensure the insulation on any of the wires has not been damaged during installation.
- 2.5 The bare or green insulated wire are for grounding, do not connect with current carrying wires.
- 2.6 Firstly connect white (or rough) fixture wire with white supply wire and then connect black (or smooth) fixture wire with black supply wire. After fixture wires are connected with supplier wires, the bare parts of wires need to be completely covered by connector, to prevent from causing short circuit and electric leakage.

The method of wiring and operation refer to circuit diagram 1 and circuit diagram 2:

Circuit diagram 1

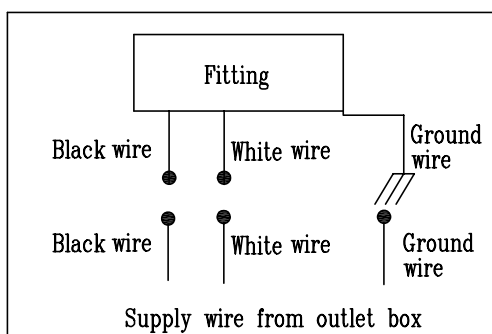

Circuit diagram 2

