


DWG. NO.		362-974-0630H	
REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER ECR 7405	7/10/02	9/1/02

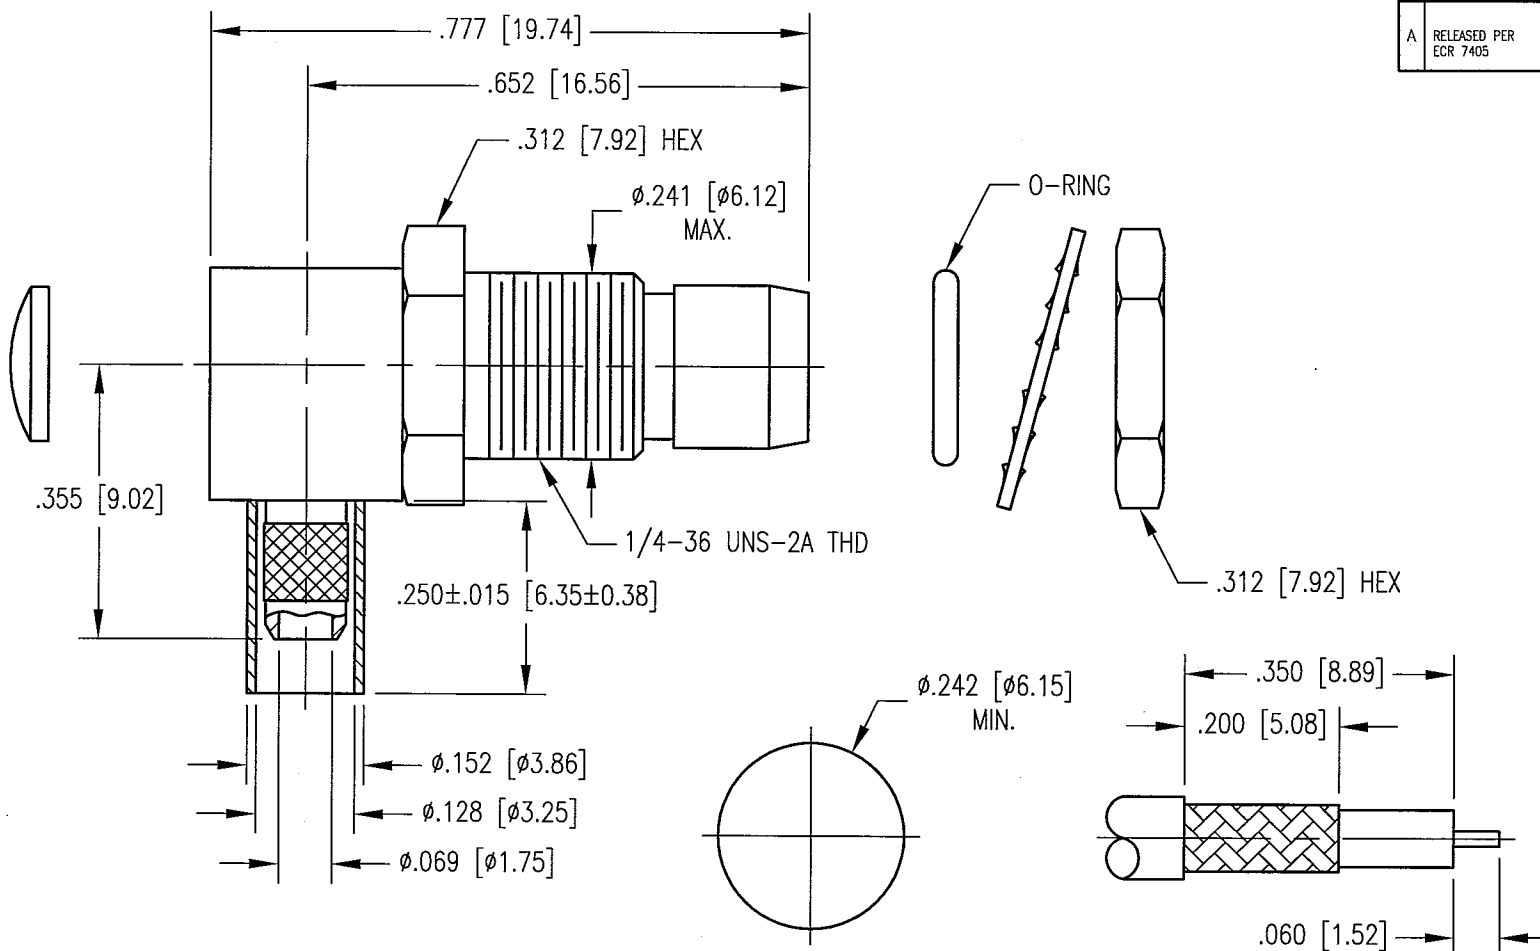

NOTES:

1. MATERIALS:

ALL METAL PARTS: BRASS PER ASTM B16
 INSULATOR: TEFLON PER ASTM D1710
 O-RING: SILICONE RUBBER PER ZZ-R-765

2. FINISH:

CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 ALL OTHER METAL PARTS: .000005 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290

3. FOR USE WITH RG-316 CABLE OR EQUIVALENT.

4. FOR CABLING PROCEDURES USE CAP 9-12 WITH TRIMMING DIMENSIONS SHOWN.

5. CRIMP FERRULE USING .128 HEX DIE.

RECOMMENDED MOUNTING HOLE

CABLE TRIMMING DIMENSIONS

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]		NORTHROP GRUMMAN Winchester Electronics 400 Park Road Watertown, CT 06795	
TOLERANCES: DECIMALS .XX ± .01 [0.254] .XXX ± .005 [0.127] ANGLES ± 2°		SCALE: 4:1	
CUSTOMER DRAWING		TITLE BMA RIGHT ANGLE BULKHEAD PLUG	
DRAWN JED	DATE 7/10/02	CHECKED 7/10/02	DATE 7/10/02
APPROVED 9/1/02	DATE 7/10/02	APPROVED 7/10/02	DATE 7/10/02
A 362-974-0630H		SH. 1	OF 1
REV. A		REV. A	