



DWG. NO.		361-500-0850H	
REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER ECR 7401	JED 7/12/02	<i>[Signature]</i>

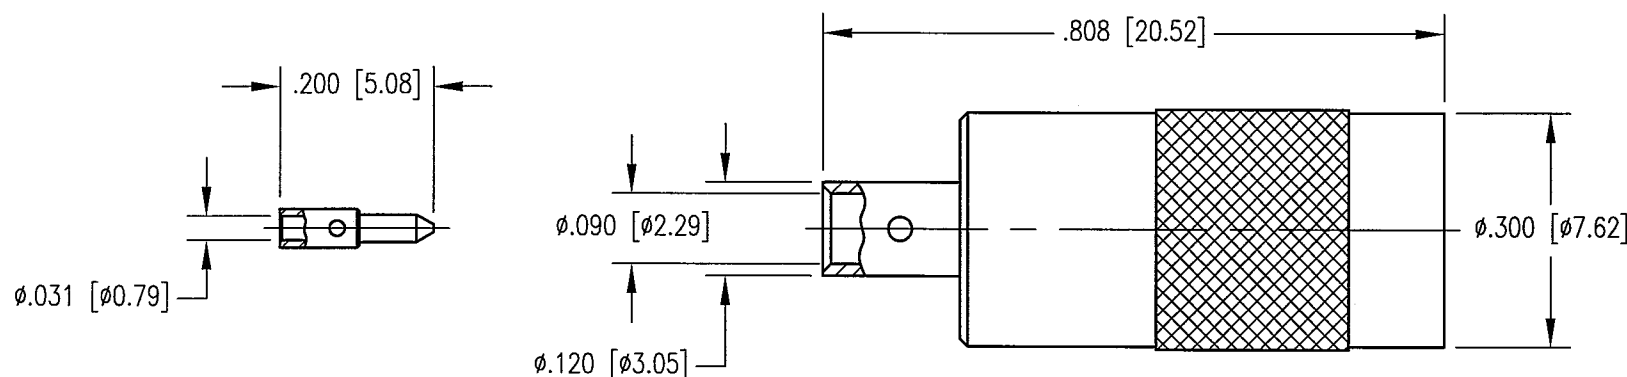

CABLE TRIMMING DIMENSIONS

NOTES:

1. MATERIALS:
BODY, REAR CONTACT AND CONTACT SHROUD: BRASS PER ASTM B16
ALL OTHER METAL PARTS: COPPER ALLOY
INSULATOR: TEFLON PER ASTM D1710
2. FINISH:
BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
ALL OTHER METAL PARTS: .000030 MIN. GOLD PER MIL-G-45204 OVER
.000050 MIN. NICKEL PER QQ-N-290
3. FOR USE WITH .085 DIA. SEMI-RIGID CABLE OR EQUIVALENT.
4. FOR CABLING PROCEDURES USE CAP 5-24 WITH TRIMMING DIMENSIONS SHOWN.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMALS: .XX ± .01 [0.254] .XXX ± .005 [0.127] ANGLES ± 2° SCALE: 4:1		NORTHROP GRUMMAN Winchester Electronics 400 Park Road Watertown, CT 06795	
CUSTOMER DRAWING		TITLE BMA STRAIGHT RECEPTACLE	
DRAWN JED	DATE 7/12/02	CHECKED <i>[Signature]</i>	DATE 7-13-02
APPROVED <i>[Signature]</i>	DATE 7/18/02	APPROVED <i>[Signature]</i>	DATE 7/18/02
A 361-500-0850H		SMT. OF 1 1	REV. A