



Panic Button, Interlogix / GE Compatible


1. Specifications

| | |
|-------------------------------|-----------------------------------|
| Frequency: | 319.5 MHz |
| Operating Temperature: | 32° – 110°F (0° – 43°C) |
| Operating Humidity: | 0 – 95% RH non-condensing |
| Battery: | 1x CR2032 Panasonic Lithium 3V DC |
| Battery Life: | 5 Years |
| Compatibility: | Interlogix / GE receivers |
| Supervisory Interval: | Approximately 60 minutes |

2. Package Contents

| | |
|--------------------------------|--|
| 1 x Panic Button | 1 x Rope Necklace |
| 1 x Wrist Band | 1 x Pendant Insert (2 pcs set) |
| 1 x Surface Mount | 1x Belt Clip (used with Surface Mount) |
| 1 x CR2032 battery (installed) | |

3. Component Identification

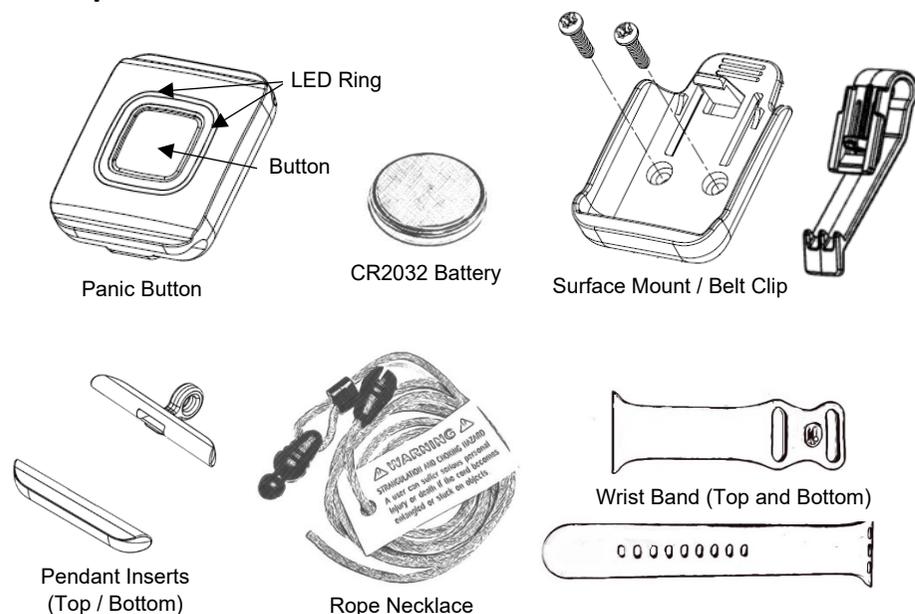

4. Product Configuration

The RE103P can be worn or mounted in four (4) ways:

1. On a wrist using a compatible wrist band (the color of the included wrist band may vary).
2. Around the neck as a pendant using the included pendant inserts and snap-closure adjustable-length rope necklace (color may vary).
3. Mounted to a flat surface with the surface mount bracket and screws.
4. Worn on a belt with the surface mount bracket plus belt clip.

Note: The Surface Mount / Belt Clip accessory kit is not included and sold separately. Other wristbands designed to be compatible with 38/40/41mm Apple Watch™ can also be used with the RE103P Panic Button.

5. Enrolling

The RE103P Panic Button supports up to three (3) different alerts or commands to be triggered through different button presses. The button appears as three sensor zones, each with their own unique TxID. The learn activity should be repeated for each Zone / TxID.

When enrolling the device, it is recommended to name each zone for easy identification and assignment to the intended action or scene. Example: zone #1 = “PB1 ST” (panic button #1 single tap), zone #2 = “PB1 DT” (panic button #1 double tap), and zone #3 = “PB1 PH” (panic button #1 press and hold).

To enroll the sensor, set your panel into program mode. Then go to the Learn Sensors menu. Refer to your specific alarm panel instruction manual for details on these menus.

To enter enrollment mode on the button, follow these steps:

1. To initiate Learn Mode, press and hold the panic button for twenty (20) seconds. During this hold time, the LED will blink three times, then remain on for 3 more seconds [Zone 3]. Do not release the button, continue holding down the button until the LED blinks five (5) times indicating Learn Mode is enabled.

2. In Learn Mode, press the panic button pattern for the desired Zone.

| | | |
|--------|----------------|--|
| Zone 1 | Single Tap | Press and Release (Once) |
| Zone 2 | Double Tap | Press and Release (Twice, <1 second apart) |
| Zone 3 | Press and Hold | Press and Hold (5 seconds) Then release |

3. Repeat the panic button learn transmissions until the panel recognizes the desired Zone’s serial number.

Important: After the zone is recognized by the panel, be sure to assign a zone type that is “chime only”. Otherwise, the button zone will be treated like a Door/Window Open and Restore and may trigger an alarm state.

Note: Learn Mode on the Panic Button will automatically end after 15 seconds of inactivity (no button press). Re-initiate Learn Mode as needed until all zones are recognized by the panel.

6. Panic Button Testing

The Panic Button is designed to be used within 100 ft. (30 m) of the panel. Test before first use, as well as weekly. The test verifies proper communication between the sensor and the panel/receiver.

To test the Panic Button after enrollment, refer to the specific panel/receiver documentation to place the panel into sensor test mode. Press the button sequence for each zone to be tested, from location(s) the Panic Button shall be used. Verify the transmission count received on the panel is consistently 5 of 8 or better.

7. Product Operation

The RE103P Panic Button supports up to three (3) different alerts or commands to be triggered through different button presses. The button appears as three sensor zones, each with their own unique TxID, as shown: (next page)

| | | |
|--------|----------------|--|
| Zone 1 | Single Tap | Press and Release (Once) |
| Zone 2 | Double Tap | Press and Release (Twice, <1 second apart) |
| Zone 3 | Press and Hold | Press and Hold (5 seconds) Then release |

The LED Ring blink patterns confirm each button press type detected:

| | | |
|--------|----------------|---------------------------------------|
| Zone 1 | Single Tap | One short blink + On for 3 seconds |
| Zone 2 | Double Tap | Two short blinks + On for 3 seconds |
| Zone 3 | Press and Hold | Three short blinks + On for 3 seconds |

The LED will remain on for approximately 3 seconds when transmitting. Wait until the LED is OFF before attempting the next button press.

A Zone event transmission is sent as an Open immediately followed by a Restore. Depending on the security panel's features, triggering each of the Panic Button's Zones can be set up as the initiating action to trigger a pre-configured automation or rule. Refer to your specific panel's instructions for more information.

8. Maintenance - Replacing the Battery

When the battery is low, a signal will be sent to the control panel.

To replace the battery:

- Insert a plastic pry tool, or a small flat blade screwdriver into one of the notches on the back of the Panic Button and gently pry to release the back cover from the main housing.
- Set the back cover aside, and gently remove the circuit board from the housing.
- Remove the old battery and insert a new Panasonic CR2032 battery with the positive side (+) of the battery touching the battery holder marked with the (+) symbol.

- Re-assemble by placing the circuit board into the back case with the battery side facing down. Align the small notch on the side of the circuit board with the tallest plastic rib on the inside wall of the back case. When properly inserted, the circuit board will sit level inside the back case.
- Align the arrows of the back cover and the main housing, then carefully snap them together.
- Test the Panic Button to ensure proper operation.

WARNING: Failure to follow these warnings and instructions can lead to heat generation, rupture, leakage, explosion, fire, or other injury, or damage. Do not insert the battery into the battery holder wrong side up. Always replace the battery with the same or equivalent type (see Specifications on page 1). Never recharge or disassemble the battery. Never place the battery in fire or water. Always keep batteries away from small children. If batteries are swallowed, promptly see a doctor.

Always dispose and/or recycle used batteries in accordance with the hazardous waste recovery and recycling regulations for your location. Your city, state, or country may also require you to comply with additional handling, recycling, and disposal requirements.

Product Warnings and Disclaimers

WARNING: CHOKING HAZARD - Small parts. Keep away from children.

WARNING: STRANGULATION AND CHOKING HAZARD – A user can suffer serious personal injury or death if the cord becomes entangled or stuck on objects.

FCC Compliance Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for Class B digital devices, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-orient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment to an outlet on a different circuit from the receiver
- Consult the dealer or an experienced radio/TV contractor for help

Warning: Changes or modifications not expressly approved by Alula could void the user's authority to operate the equipment.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

C'et appareil est conforme la norme d'Industrie Canada exempts de licence RSS. Son fonctionnement est soumis aux deux conditions suivantes: (1) c'et appareil ne peut pas provoquer d'interférences, et (2) c'et appareil doit accepter toute interférence, y compris les interférences qui peuvent causer un mauvais fonctionnement de la dispositif.

FCC ID: XQC-WST131 IC: 9863B-WST131

Trademarks

Alula is a trademark owned by Alula Holdings, LLC.

Ecolink is a trademark owned by Ecolink Intelligent Technology Inc.

Apple Watch is a trademark of Apple Inc.

All trademarks, logos and brand names are the property of their respective owners. All company, product and service names used in this document are for identification purposes only. Use of these names, trademarks and brands does not imply endorsement.

Alula products will function with one of either Interlogix or GE systems. However, no Alula product is produced by, endorsed by, nor is officially associated with Interlogix or GE. Alula recommends verifying proper enrollment and operation, per control panel installation instructions, at installation.

RE103P Designed and manufactured by Ecolink Intelligent Technology Inc. 2022.

© 2022 Ecolink



2340 Energy Park Drive
St. Paul, MN 55108
1-888-88-ALULA
www.Alula.com

PN: 47-00036
Rev B 10/2/2023