4272VNC DROP-IN

Key Attributes

Shape:	RECTANGULAR
Material:	ACRYLIC
Soaker Weight:	140 lbs
Jetted Weight:	170 lbs
Average Fill Capacity*:	70-80 gal

^{*}Estimated with occupant inside. May vary based on occupant's volume.

Required Electrical	Service 110v
Air Bath or Whirlpool	1x 15 amp GFCI
Whirlpool w/ Inline Heater	1x 20 amp GFCI
Whirlpool & Air Jetted	1x 20 amp GFCI
Soaker	n/a


Available Therapy Systems

4272VNC(S)	Non-Jetted Soaking
4272VNCW	Whirlpool Jetted
4272VNCA	Air Jetted
4272VNCD	Whirlpool & Air Jetted
4272VNCD*X	Whirlpool & Air Jetted Deluxe

Key Measurements (inches)

Overall Outer:	. 72 L x 41.625 W x 23 H
Overall Interior:	. 63 L x 33.5 W x 20 H
Interior Base:	. 52.5 L x 30 W
Built-in Seat:	.n/a
Soaking Depth:	.16
Drain to Side Wall:	.20.7
Drain to Nearest Wall:	.9
Lip Size:	.2
Deck Space:	.4
Tile Flange:	.n/a
Arm Rest:	.n/a


It is vital that tub is completely level for drain to work properly.

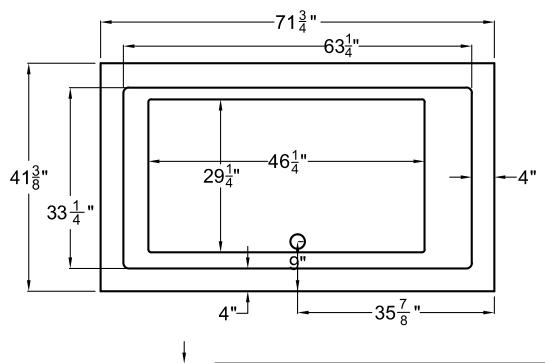

Compliance: Uniform Plumbing Code UPC®;; International Plumbing Code IPC®; ADA

Standards: ASME A112.19.15; CSA C22.2 No. 218.2-15; UL 1795, 5th Edition Issued September 02, 2016 including revisions through August 25, 2017

Certifeid: UPC,EGS

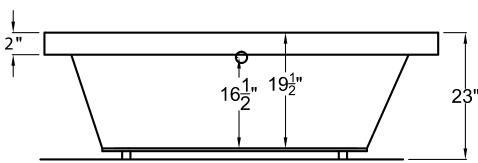

- IMPORTANT! TEST THE TUB'S DRAIN AND JETS (if any) BEFORE PERMANENT INSTALLATION!
- INSPECT THE TUB WHEN RECEIVED! Report any damages or missing parts within 5 business days of delivery date.
- Before ordering or installing, please consider future access to equipment.
- Please measure tub on-site before building tub surrounding!
- Jet, pump & blower locations are predetermined and cannot be changed.
- Tub door must remain closed when not in use.

- Please note that installer(s) must be certified or warranty will be voided.
- Measurements are subject to a +/- .5" variance and subject to change without notice. Measurements here in supersede all other published specs prior to publication date shown below.
- Inline heater (if included) is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.
- Product must be registered for warranty activation. See user manual or visit SWCORP.com/register for more information.