

SAVE THIS OWNERS GUIDE FOR FUTURE REFERENCE


WINDPROOF

BUTANE TORCH

DOUBLE JET

Read Owner's guide before operating lighter. Failure to follow instructions listed in this guide may result in lighter shock, fire and serious injury.

Butane not included.

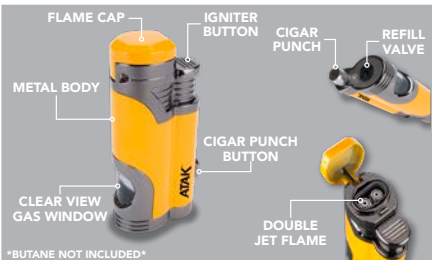

To operate the cigar punch: slide the side button exposing the cigar punch, slide to the right, and release to lock in place.

⚠ WARNING!

Keep away from children.

Never point directly at face or body when lighting.

Do not expose to heat or store in direct sunlight.

Do not use near fire, flames, sparks or combustible materials.

Treat your torch as you would any fine instrument: do not drop or otherwise abuse.

Never use a damaged or malfunctioning lighter.

Do not attempt to modify this butane lighter's construction or use unapproved accessories.

Keep the torch lighter out of reach of anyone who has not read all enclosed instructions and warnings.

Lighter DOES NOT come with butane for safety and security reasons.

To fill up your lighter, follow these easy steps:

Note: do not refill a lighter immediately after using it; give it some time to cool off.

1. You will notice a (+) and a (-) at the bottom of your lighter. When refilling your lighter, use a screwdriver (or something small) to turn this all the way to the (-)
2. To bleed the air out of the fuel tank, push on the refill valve with a screwdriver. When there is air in the fuel tank, this prevents the butane from entering the tank.
3. Hold your lighter completely in an upside-down position (this helps avoid air entering the fuel tank). Shake your butane can and press the stem of the can directly onto the refill valve (while in a straight up-and-down position). Hold for about 5 seconds and release. Repeat in shorter bursts as necessary until the tank is filled.



Note: if you notice gas leakage/high hissing sound, you might not be holding the lighter and butane completely straight. Try adjusting, and if it persists, you might need an adapter, which traditionally comes with butane.

4. Let your lighter sit for a moment; butane gets cold when released from the can. You might notice that your lighter gets very cold- this is normal. Let it warm up for about a minute or so.
5. Turn your flame adjuster (+) to the desired flame height and test it out! If there is no flame, repeat the above steps.

⚠ WARNING!

Never fill or empty any torch or lighter over a sink (or similar well) or surface depression. Butane gas is heavier than air and may collect in low spaces, and ignite if sparked. Always refill your torch in a well ventilated room and always allow gas to stabilize for 60 seconds before attempting to ignite.