IQ MINI DW S-LINE QUICK INSTALL GUIDE

STEP 1 CHOOSE INSTALLATION LOCATION

Also great for:
Medicine cabinets
Gun safes
Garage doors
Interior doors

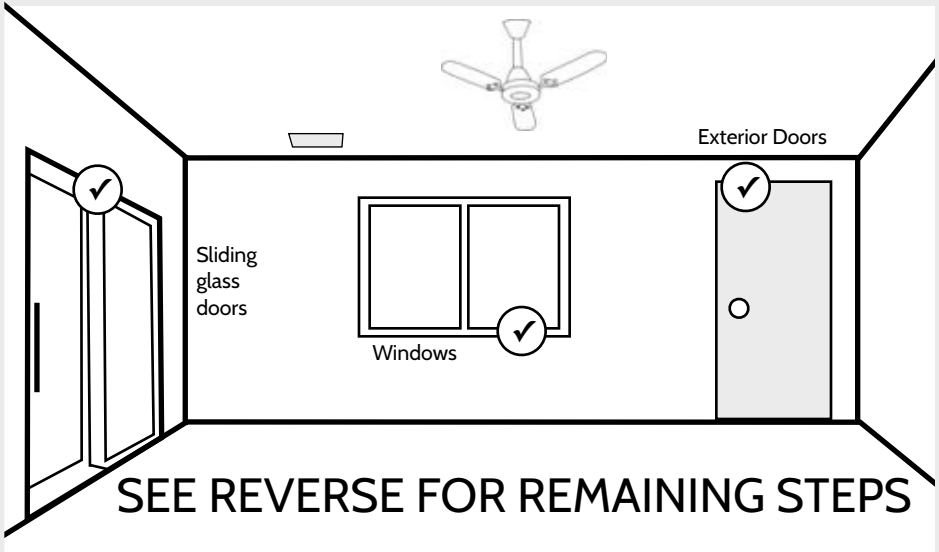

SEE REVERSE FOR REMAINING STEPS

SPECIFICATIONS

Sensor: 2.25"H x 1"W x .5"D

Wireless signal range: 600ft (200M), open air.
Code outputs: tamper, tamper restore, alarm, alarm restore, low battery.
Transmitter frequency: SECURE 319.5 MHz (S-Line)
Unique code ID
Supervisory keep-alive interval: 70 minutes.
RF Peak field strength: typical 36000 uV/m at 3m

Operating Temperature: -10C~50C
Relative Humidity: 5-95% Non-Condensing
Storage Temperature: -40-80C

Replace battery with exact replacement every 5 years with 3V Lithium (x2).

(2) -Panasonic CR2032
-Energizer CR2032
-Duracell DL2032

Note: Battery Safety

Observe polarity when inserting replacement batteries to avoid damaging the sensor.
Risk of fire, burns and explosion. Do not recharge, disassemble, burn or expose batteries to temperatures above 100C (212F)
Dispose of used batteries properly and in accordance with all local laws
Keep batteries away from children

This is a quick guide for experienced installers only. Refer to http://dealers.qolsys.com (login required)

STEP 2 REMOVE BATTERY TABS



STEP 3 APPLY ADHESIVE

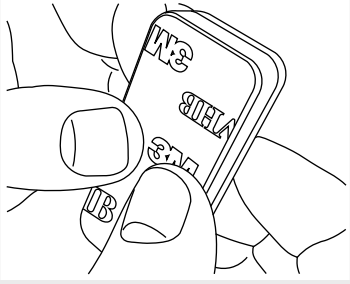

STEP 4 LINE UP SENSOR & MAGNET



STEP 5 SECURE SENSOR & MAGNET



Apply provided adhesive strips to the back of sensor and magnet.

Magnet gap should not exceed 3/4"

STEP 6 LEARN INTO PANEL

Place your panel in "autolearn" mode



Open and close the case to "tamper" the device

Customize name and settings as desired and and touch "ADD"

CONNECTS USING
SECURE
319.5 MHz

Document#: IQS-MDW-SQG-02-17
Revision#: 2/24/17
Issue Date: FEB 2017
Qolsys Product #: QS1135-840

Qolsys Inc. proprietary.
Reproduction without permission is not permitted.
FCC ID: 2ABBZ-RF-MDWS
IC: 11817A-RFMDWS

GOT QUESTIONS?
CONTACT TECH SUPPORT
TechSupport@Qolsys.com

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme avec Industrie Canada exempts de licence standard RSS (s). Son fonctionnement est soumis aux deux conditions suivantes: (1) cet appareil ne doit pas provoquer d'interférences et (2) cet appareil doit accepter toute interférence, y compris celles pouvant causer un mauvais fonctionnement de l'appareil.