

Nova T☆ Controls

This series of classic thin-profile linear-slide dimmers and switches offers the following standard features:

- Square Law Dimming
- Voltage compensation (not applicable to NTCL-250)
- Power-failure memory
- Superior RFI suppression
- Captive linear slider
- Accessible air-gap switch
- Electrostatic discharge tested
- Precise color matching
- Heavy-duty components for surge protection and long product life
- 100% factory tested

Product Family Features

- Available for 120–277~ line voltage switching (sink-only control) 0–10 V== LED drivers and ballasts (power pack not required for loads up to 8 A)
- Excellent for residential or commercial applications
- Intuitive operation; easy to use
- Slide-to-off and preset models available
- Enclosed heat sink for aesthetically pleasing appearance
- Multi-gang alignment for quick and easy installation
- Full family of products for most lighting sources, plus matching accessories and wallplates
- Rated at 120 V~ 60 Hz, unless noted otherwise
- Custom products (CPN) are available to meet specific customer needs. Please contact Lutron Customer Assistance at 1.844.LUTRON1 (588.7661) for availability.

Regulatory Approvals

- UL® Listed
- CSA
- NOM

Colors and Finishes

When ordering product for use with metal wallplates, the product and wallplate must be ordered separately. See the “Architectural Wallplates and Accessories” section of **Volume 1: Basic Devices and Single-Space Systems Catalog** (P/N 367-1746) for ordering procedure. See table to the right for complete list of metal finishes.

Custom color matching is available for all Nova T☆ products. A swatch or sample is all that is required. Call customer service to arrange for a color-matched control.



Slide-to-Off Controls

Select light level with slider; slide down to OFF



Preset Controls

Select light level with slider; press ON/OFF

Engraving is available for all Nova T☆ products. Engraving schedules are available at www.lutron.com/engraving or through Customer Assistance at 1.844.LUTRON1 (588.7661).

Available Colors and Finishes

Matte Finishes

To order, add color/finish suffix code to model number. Example: NT-600-**WH**

Code	Color
WH	White
TP	Taupe
AL	Almond
BL	Black

Code	Color
GR	Gray
IV	Ivory
LA	Light Almond

Code	Color
BE	Beige
SI	Sienna
BR	Brown

Special Order

To order, add color/finish suffix code to model number. Example: NT-600-**BB**

Metal Finishes

Code	Color
SB	Satin Brass
BC	Bright Chrome

Code	Color
BB	Bright Brass

Special Metal Finishes

Code	Color
QB	Antique Brass
SC	Satin Chrome
BN	Bright Nickel

Code	Color
QZ	Antique Bronze
SN	Satin Nickel

Anodized Aluminum Finishes

Code	Color
CLA	Clear


Code	Color
BLA	Black

Code	Color
BRA	Brass

Job Name:	Model Numbers:	
Job Number:		

Dimensions

Measurements shown as: in (mm)

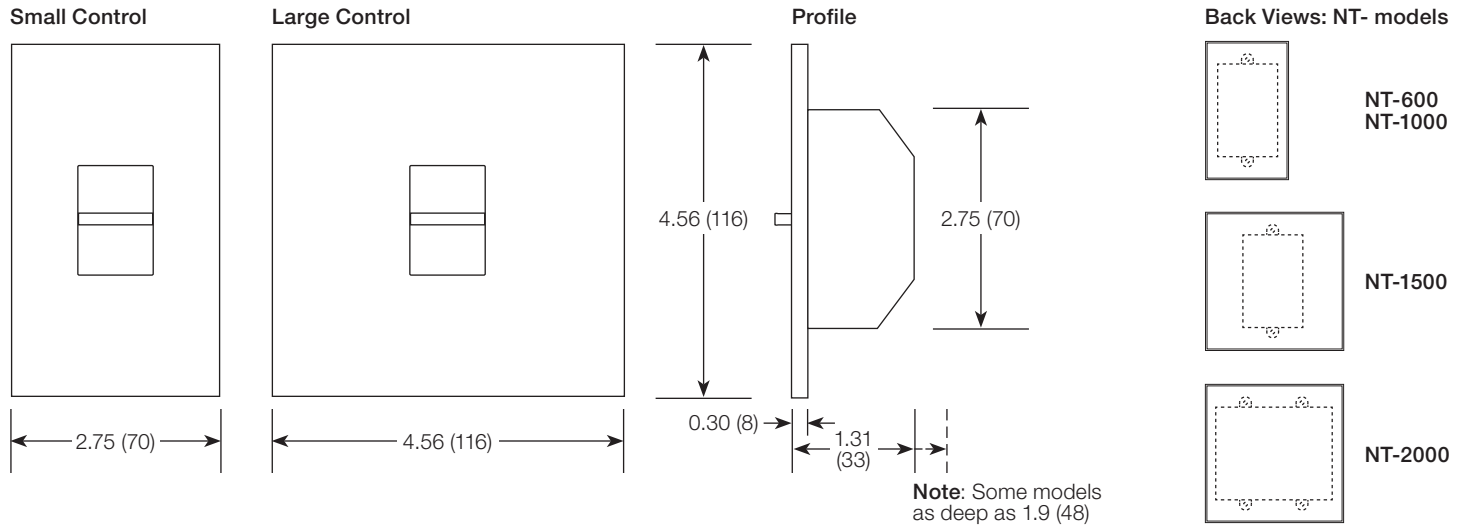


Available Controls and Accessories (Summary)

For specific uses, capacities, and model numbers, see the following pages.

Controls


Slide-to-Off Dimmers



Small Control

Large Control

Preset Dimmers



Small Control


Large Control

Linear-Slide Switches



Small Control

Slide-to-Off Fan-Speed Controls




Small Control

Large Control

Receptacles and Plugs


Receptacles



15 A

20 A


GFCI Receptacles



15 A

20 A


Isolated Ground Receptacles



15 A

20 A


Duplex for Dimming Use



15 A

20 A


Half for Dimming Use



15 A

20 A


Replacement Plug for Dimming Use




10 A

Jacks and Ports


Single Telephone




Double Telephone




Triple Telephone




Cable TV



Telephone/Cable TV



6-Port Frame



Job Name:

Model Numbers:

Job Number:

Control Specifications

Incandescent Dimmers: Slide-to-Off

 Small Control	Description	Maximum Capacity	Model Number
	Single-pole 120 V~ 60 Hz	600 W	NT-600-XX
 Large Control	Single-pole 120 V~ 60 Hz	1000 W	NT-1000-XX
	Single-pole 120 V~ 60 Hz	1500 W	NT-1500-XX
 Large Control	Single-pole 120 V~ 60 Hz	1500 W	NT-1500-XX
	Single-pole 120 V~ 60 Hz	1950 W	NT-2000-XX

- The NT-2000-XX does not have removable side sections; it can be ganged but must be kept intact.
- The NT-2000-XX requires a 2-gang wallbox.

Incandescent Dimmers: Preset

 Small Control	Description	Maximum Capacity	Model Number
	Single-pole/3-way/4-way 120 V~ 60 Hz	600 W	NT-603P-XX
 Large Control	Single-pole/3-way/4-way 120 V~ 60 Hz	1000 W	NT-1003P-XX
	Single-pole/3-way/4-way 120 V~ 60 Hz	1500 W	NT-1503P-XX

- For 3-way or 4-way switching, use NT-3PS-XX (3-way), NT-4PS-XX (4-way), or other mechanical switches.

C•L Dimmers: Slide-to-Off

 Small Control	Description	Maximum Capacity	Model Number
	Dimmable LED/CFL Single-pole 120 V~ 60 Hz	250 W	NTCL-250-XX
	Incandescent/Halogen Single-pole 120 V~ 60 Hz	1000 W	
	Hi-lume 1% 2-Wire LTE LED driver Single-pole 120 V~ 60 Hz	400 W (maximum of 10 drivers)	
	Mixed bulb type Single-pole 120 V~ 60 Hz	See Derating: Maximum Capacities in Multigang Installations	

Application requirements:

- When dimming LEDs or CFLs, **only** bulbs marked or rated as **dimmable** and on the recommended list may be used.
- For a complete list of recommended **dimmable** LEDs and CFLs please visit www.lutron.com/dimcflled. For questions call 1.844.LUTRON1.
- Some dimmable LEDs and CFLs require a minimum number of bulbs for proper operation. For details and the bulb list, visit www.lutron.com/dimcflled
- For LED product selection tool, visit www.lutron.com/ledtool

Features:

- Low-end adjustment to accommodate a wide range of bulbs.
- HEDT Technology: Advanced Lutron dimming circuitry designed for compatibility with most high efficacy light bulbs.
- NEMA SSL-7A Type 2 compliant.

Electronic Low-Voltage (ELV) Dimmers: Slide-to-Off

 Small Control	Description	Maximum Capacity	Model Number
	Single-pole 120 V~ 60 Hz	300 W	NTELV-300-XX
 Large Control	Single-pole 120 V~ 60 Hz	600 W	NTELV-600-XX

- Maximum capacity is permitted lamp wattage.
- Requires neutral wire connection.
- For larger capacity ELV loads (up to 1000 W), use Nova T★ fluorescent dimmers (NTF-10-XX or NTF-103P-XX) with a PHPM-WBX interface.
- Minimum Load: 5 W Incandescent/Halogen or 1 ELV transformer. ELV transformer must be loaded per manufacturer's recommendations.

(continued on next page...)

Job Name:

Job Number:

Model Numbers:

Control Specifications (continued)

 Magnetic Low-Voltage (MLV) Dimmers: Slide-to-Off

 Small Control	Description	Maximum Capacity	Model Number
	Single-pole 120 V~ 60 Hz	600 VA / 450 W	NTLV-600-XX
	Single-pole 277 V~ 60 Hz	600 VA / 450 W	NTLV-600-277-XX
	Single-pole 120 V~ 60 Hz	1000 VA / 800 W	NTLV-1000-XX
	Single-pole 277 V~ 60 Hz	1000 VA / 800 W	NTLV-1000-277-XX
 Large Control	Single-pole 120 V~ 60 Hz	1500 VA / 1200 W	NTLV-1500-XX

- Maximum capacity is permitted lamp wattage.
- 277 V~ models require neutral wire connection.

 Magnetic Low-Voltage (MLV) Dimmers: Preset

 Small Control	Description	Maximum Capacity	Model Number
	Single-pole/3-way/4-way 120 V~ 60 Hz	600 VA / 450 W	NTLV-603P-XX
	Single-pole/3-way/4-way 120 V~ 60 Hz	1000 VA / 800 W	NTLV-1003P-XX
 Large Control	Single-pole/3-way/4-way 120 V~ 60 Hz	1500 VA / 1200 W	NTLV-1503P-XX

- For 3-way or 4-way switching, use NT-3PS-XX (3-way), NT-4PS-XX (4-way), or other mechanical switches.

 Fluorescent Dimmers for Lutron 3-wire fluorescent ballasts or LED drivers: Slide-to-Off

 Small Control	Description	Maximum Capacity	Model Number
	Single-pole 120 V~ 60 Hz	16 A	NTF-10-XX
	Single-pole 277 V~ 60 Hz	8 A	NTF-10-277-XX

- Use with Lutron 3-wire fluorescent ballasts or LED drivers only.
- For LED loads, please see the "Report Cards" at www.lutron.com/ledtool for proper loading of the dimmer.
- No derating required.
- To determine the number of ballasts that can be controlled by Nova T★ fluorescent dimmer, divide the control capacity by the ballast current.

 Fluorescent Dimmers for Lutron 3-wire fluorescent ballasts or LED Drivers: Preset

 Small Control	Description	Maximum Capacity	Model Number
	Single-pole/3-way 120 V~ 60 Hz	8 A	NTF-103P-XX
	Single-pole/3-way 277 V~ 60 Hz	6 A	NTF-103P-277-XX

- Use with Lutron 3-wire fluorescent ballasts or LED drivers only.
- For LED loads, please see the "Report Cards" at www.lutron.com/ledtool for proper loading of the dimmer.
- For 3-way or 4-way switching, use NT-3PS-XX (3-way), NT-4PS-XX (4-way), or other mechanical switches. No derating required.
- To determine the number of ballasts that can be controlled by Nova T★ fluorescent dimmer, divide the control capacity by the ballast current.

(continued on next page...)

Job Name:

Model Numbers:

Job Number:

Control Specifications (continued)

Reverse-Phase Electronic Low-Voltage (ELV) Dimmer: Slide-to-Off

Small Control	Description	Maximum Capacity		Model Number
	Dimmable LED / CFL; Single-pole 120 V~ 60 Hz	250 W		NTRP-250-XX
	Incandescent / Halogen Single-pole 120 V~ 60 Hz	600 W		
	ELV with Halogen Single-pole 120 V~ 60 Hz	600 W		
• For the best performance, use a bulb that is on the Lutron LED Report Card Tool at www.lutron.com/ledtool. For questions call 1.877.DIM.LED8. • When dimming LEDs or CFLs, only bulbs marked or rated as DIMMABLE WITH REVERSE-PHASE OR UNIVERSAL DIMMERS may be used. • For recommended ELV transformers and compatible MR16 LED bulbs, please see Lutron Application Note #559 at www.lutron.com/TechnicalDocumentLibrary/048559.pdf. Always follow the transformer and bulb manufacturer instructions for allowable loading. • Not compatible with magnetic low-voltage (MLV) transformers or magnetic LED transformers/drivers • Dimmer is not compatible with bulbs rated only for forward-phase type dimmers. • Minimum Load: 1 compatible CFL / LED bulb or 5 W Incandescent / Halogen or 1 ELV transformer. ELV transformer must be loaded per the manufacturer's recommendation.				

0–10 V== Dimmers for Electronic Ballasts or LED Drivers: Slide-to-Off

Small Control	Description	Maximum Capacity*		Model Number
	Single-pole 0–10 V== 120–277 V~	Load	0–10 V== Sink	NTSTV-DV-XX
		8 A	30 mA	
• Power pack not required for loads up to 8 A. May use Lutron power pack (model PP-DV or PP347H; see Lutron P/N 369544) for higher load current applications or for Class 2 installations. • Works with all ballasts and drivers that provide a current source compliant to IEC 60629 Annex E.2, and whose inrush current does not exceed NEMA410 standards for electronic ballast/driver loads of 8 A steady-state current. Refer to LED driver and ballast manufacturer's specification for 0–10 V== sink currents. • Control has a high and low end trim to adjust the 0–10 V== output for optimal dimming performance. * Limited by whichever rating is achieved first.				

Fluorescent Dimmers for Tu-Wire Electronic Ballasts: Slide-to-Off

Small Control	Description	Maximum Capacity	Model Number
	Single-pole 120 V~ 60 Hz	5 A	NTFTU-5A-XX
	Single-pole 277 V~ 60 Hz	5 A	NTFTU-5A-277-XX
• Use with Lutron Tu-Wire line voltage control electronic dimming ballasts only. • To determine the number of ballasts that can be controlled by Nova T★ fluorescent dimmer, divide the control capacity by the ballast current. • Compatible with Advance® Mark X® and Sylvania Powersense® ballasts.			

Fluorescent Dimmers for Advance® Mark X® VEZ series 277 V~ Ballasts: Preset

Small Control	Description	Maximum Capacity	Model Number
	3-way 277 V~ 60 Hz	3 A	NTFTU-103P-277-XX-CPW0196
• For control of permanently installed Advance® Mark X® VEZ series 277 V~ ballasts only. • Install on load side only. • No derating required. • To determine the number of ballasts that can be controlled by Nova T★ fluorescent dimmer, divide the control capacity by the ballast current.			

Linear-Slide Switches for General Purpose: All Sources and Motor Loads

Small Control	Description	Maximum Capacity	Model Number
	Single-pole 120/277 V~ 60 Hz	20 A	NT-1PS-XX
	3-way 120/277 V~ 60 Hz	20 A	NT-3PS-XX
	4-way 120/277 V~ 60 Hz	20 A	NT-4PS-XX
• No derating required.			

(continued on next page...)

Job Name:	Model Numbers:	
Job Number:		

Control Specifications (continued)

**Fan-Speed Controls: Quiet**

 <i>Small Control</i>	<i>Description</i>	<i>Maximum Capacity</i>	<i>Model Number</i>
	Single-pole, 3-speed 120 V~ 60 Hz	1.5 A	NTFSQ-XX

- For use with one ceiling paddle fan.
- No derating required.

**Fan-Speed Controls: Fully Variable**

 <i>Small Control</i>	<i>Description</i>	<i>Maximum Capacity</i>	<i>Model Number</i>
	Single-pole, Adjustable minimum speed 120 V~ 60 Hz	6 A	NTFS-6E-XX
 <i>Large Control</i>	<i>Description</i>	<i>Maximum Capacity</i>	<i>Model Number</i>
	Single-pole, Adjustable minimum speed 120 V~ 60 Hz	12 A	NTFS-12E-XX

- For use with one or more ceiling, ventilation, or exhaust fans. Do not mix fan types on same control.

Job Name:

Model Numbers:

Job Number:

Accessory Specifications

Receptacles and Plugs			
 	Description	Maximum Capacity	Model Number
	Receptacle	15 A 125 V~	NTR-15-XX
		20 A 125 V~	NTR-20-XX
	Tamper Resistant Receptacle	15 A 125 V~	NTR-15-TR-XX
		20 A 125 V~	NTR-20-TR-XX
No derating required.			
 	Description	Maximum Capacity	Model Number
	Tamper Resistant, Self-Testing GFCI Receptacle	15 A 125 V~	NTR-15-GFST-XX
		20 A 125 V~	NTR-20-GFST-XX
- Insert is permanently attached to the back cover. - No derating required.			
 	Description	Maximum Capacity	Model Number
	Isolated Ground Receptacle	15 A 125 V~	NTR-15-IG-OR-XX
		20 A 125 V~	NTR-20-IG-OR-XX
- Insert is orange; wallplate is color selected. - Receptacles can be special-ordered to match wallplate color; contact Lutron Customer Service at 888.588.7661 or visit www.lutron.com. - No derating required.			
 	Description	Maximum Capacity	Model Number
	Tamper Resistant Duplex for Dimming Use	15 A 125 V~	NTR-15-DDTR-XX
		20 A 125 V~	NTR-20-DDTR-XX
- Insert is permanently attached to the back cover. - No derating required.			
 	Description	Maximum Capacity	Model Number
	Tamper Resistant Half for Dimming Use	15 A 125 V~	NTR-15-HDTR-XX
		20 A 125 V~	NTR-20-HDTR-XX
- Insert is permanently attached. - No derating required.			
	Description	Maximum Capacity	Model Number
	Replacement Plug for Dimming Use	10 A 125 V~	RP-FDU-10-XX

(continued on next page...)



Job Name: Job Number:	Model Numbers:
---	---

Accessory Specifications (continued)

Jacks			
	Accessory Type	Description	Model Number
	Single Telephone Jack	6-conductor RJ11. Also accepts most 4-conductor plugs	NT-PJ-XX
	Cable TV Jack	F-style 75 Ohm coaxial cable	NT-CJ-XX
• No derating required for any cable jack configurations. • A physical barrier (partition) must exist when ganging with any line-voltage products.			
Frames			
	Accessory Type	Description	Model Number
	Field Customizable 6-port frame	Ships with 6 blank ports. Use with connectors shown below. Each connector fills 1 port.	NT-6PF-XX
Connectors			
	Accessory Type	Description	Model Number
	Telephone Jack Connector	6-conductor RJ11 Category 3	CON-1P-C3-WH
		8-conductor RJ45 Category 5e	CON-1P-C5E-WH
		8-conductor RJ45 Category 6	CON-1P-C6-WH
	Fiber Jack Connector	MT-RJ feed-through	CON-1F-MTRJ-WH
	Fiber Jack Connector	SC simplex	CON-1F-SC-WH
	Fiber Jack Connector	LC non-flush mount	CON-1F-LC-WH
	Fiber Jack Connector	ST style	CON-1F-ST-WH
	Cable Jack Connector	F-style 75 Ohm coaxial cable	CON-1C-WH
	BNC Jack Connector	BNC connector	CON-1B-WH

Job Name:	Model Numbers:	
Job Number:		

Wallplate Specifications

Wallplates			
	Description	Dimensions (w × h)	Model Number
	Single-gang: For 1 small control (provided with control)	2.75 in × 4.56 in (70 mm × 116 mm)	VWP-1-XX
	Single-gang: For 1 accessory	2.75 in × 4.56 in (70 mm × 116 mm)	VWP-R-XX
	2-Gang: For 2 small controls	4.56 in × 4.56 in (116 mm × 116 mm)	VWP-2-XX
	2-Gang: For 2 accessories	4.56 in × 4.56 in (116 mm × 116 mm)	VWP-2R-XX
	2-Gang: For 1 small control (left) and 1 accessory (right)	4.56 in × 4.56 in (116 mm × 116 mm)	VWP-2CR-XX
	2-Gang: For 1 accessory (left) and 1 small control (right)	4.56 in × 4.56 in (116 mm × 116 mm)	VWP-2RC-XX
	3-Gang: For 3 small controls	6.32 in × 4.56 in (161 mm × 116 mm)	VWP-3-XX
	4-Gang: For 4 small controls	8.45 in × 4.56 in (215 mm × 116 mm)	VWP-4-XX

For other configurations, including small controls, large controls, and accessories, refer to the “Specification Guide” on the **Dimmers and Switches** product page at www.lutron.com, or call Customer Assistance at 1.844.LUTRON1 (588.7661) for assistance.

For other faceplates, see the Lutron Custom Architectural Multi-gang tool at:
www.lutron.com/en-US/service-support/Pages/technical/design-selectiontools/multigang.aspx


Job Name: Job Number:	Model Numbers:
---	---

Derating: Maximum Capacities in Multigang Installations*


When installing more than one dimmer in the same wallbox, it may be necessary to remove some side sections prior to wiring (see diagram below). Removal of side sections may reduce maximum wattage, as shown in the charts below.

Mixing bulb types (using a combination of LED/CFL and incandescent/halogen bulbs) will also affect the maximum ratings, as shown in the charts below.


Example: If one set of side sections is removed and you have eight 9 W LED bulbs installed (Total LED Wattage = 72 W), you may add up to 500 W of incandescent or halogen lighting with the C•L control or 300 W with the Reverse-Phase control.



Do not remove outside sections (shaded areas below)



Each control has inside sections removed



Middle control has two side sections removed

Single Units	End Units	Middle Units
Full capacity. No side sections removed	One side section removed	Two side sections removed

Incandescent Controls

600 W	500 W	300 W
1000 W	900 W	700 W
1500 W	1250 W	1000 W
1950 W	—	—

- NT-2000-XX controls (for 1950 W capacity) must be ganged without removing side sections.

C•L Controls

Maximum Allowable Incandescent/Halogen Wattage			+	Total LED/CFL Wattage Installed (Wattage per bulb × number of bulbs)
1000 W	800 W	600 W	+	0 W
800 W	600 W	500 W	+	1 W – 40 W
600 W	500 W	400 W	+	41 W – 80 W
500 W	400 W	300 W	+	81 W – 120 W
400 W	300 W	200 W	+	121 W – 160 W
300 W	200 W	100 W	+	161 W – 200 W
0 W	0 W	0 W	+	201 W – 250 W

- No derating is required for multigang installations if only LED bulbs are used or if no fins are broken.

Reverse-Phase Electronic Low-Voltage (ELV) Controls

Maximum Allowable Incandescent/Halogen Wattage			+	Total LED/CFL Wattage Installed (Wattage per bulb × number of bulbs)
600 W	500 W	400 W	+	0 W
500 W	400 W	300 W	+	1 W – 40 W
400 W	300 W	200 W	+	41 W – 80 W
300 W	200 W	100 W	+	81 W – 120 W
200 W	100 W	50 W	+	121 W – 160 W
100 W	50 W	0 W	+	161 W – 200 W
0 W	0 W	0 W	+	201 W – 250 W

- No derating is required for multigang installations if only LED bulbs are used or if no fins are broken.

* For more information on multigang installations, visit www.lutron.com/en-US/Service-Support/Pages/Technical/InstallationInstructions/Ganging-Derating/GangingDerating.aspx

(continued on next page...)

Job Name:	Model Numbers:	
Job Number:		

Derating: Maximum Capacities in Multigang Installations* (continued)


Single Units		End Units		Middle Units				
	Full capacity. No side sections removed			One side section removed				Two side sections removed
Electronic Low-Voltage (ELV) Controls								
300 W		300 W		250 W				
600 W		500 W		400 W				
• Permitted lamp wattage for ELV controls.								
Magnetic Low-Voltage (MLV) Controls								
600 VA/450 W		500 VA/400 W		300 VA / 250 W				
1000 VA/800 W		900 VA/750 W		700 VA / 500 W				
1500 VA/1200 W		1250 VA/1000 W		1000 VA / 800 W				
• Permitted lamp wattage for MLV controls.								
Fluorescent 3-Wire Ballast or LED Driver Controls								
6 A		No derating required						
8 A		No derating required						
16 A		No derating required						
Fluorescent Tu-Wire Controls								
3 A		No derating required						
5 A		4 A		3.3 A				
0–10 V ⁼⁼ Electronic Ballast or LED Driver Controls								
Load	0–10 V ⁼⁼ Sink		No derating required					
8 A	30 mA							
Quiet Fan-Speed Controls								
1.5 A		No derating required						
Fully Variable Fan-Speed Controls								
6 A		4.2 A		2.5 A				
12 A		10 A		8.3 A				

* For more information on multigang installations, visit www.lutron.com/en-US/Service-Support/Pages/Technical/InstallationInstructions/Ganging-Derating/GangingDerating.aspx

Job Name: 	Model Numbers:
Job Number:	

Wiring Diagrams: Single Location

Single-Pole Control

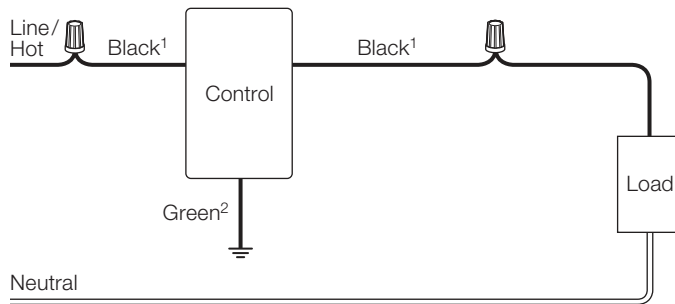

Models:

- NT-600-XX
- NT-1000-XX
- NT-1500-XX
- NT-2000-XX
- NTCL-250-XX
- NTLV-600-XX
- NTLV-1000-XX
- NTLV-1500-XX
- NT-1PS-XX
- NTFSQ-XX


Key

- Ground
- Wire connector

- ¹ Wire or brass/gold screw terminal*
- ² Wire or green screw terminal*
- ³ Wire or copper/black screw terminal*

* Dimmers have wires; switches have screw terminals


3-Way Control

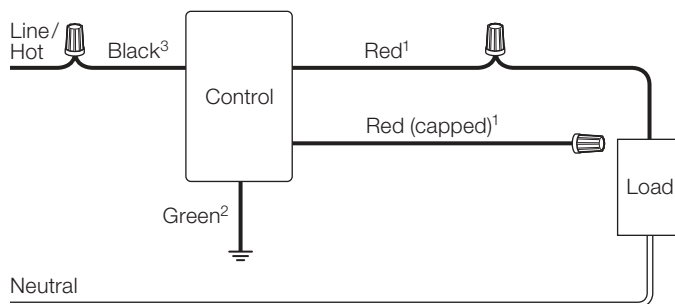

Models:

- NT-603P-XX
- NT-1003P-XX
- NT-1503P-XX
- NTLV-603P-XX
- NTLV-1003P-XX
- NTLV-1503P-XX
- NT-3PS-XX

Fan Control

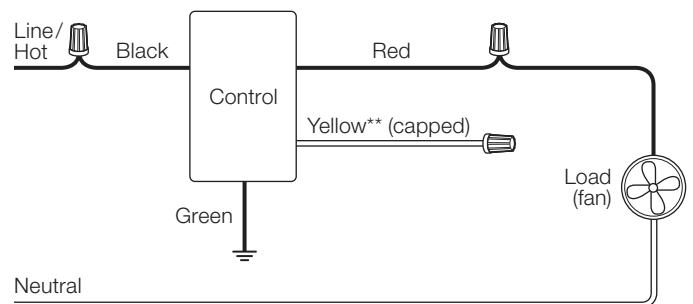


Models:

- NTFS-6E-XX
- NTFS-12E-XX

** Switched full-voltage only

Single-Pole Control with Neutral

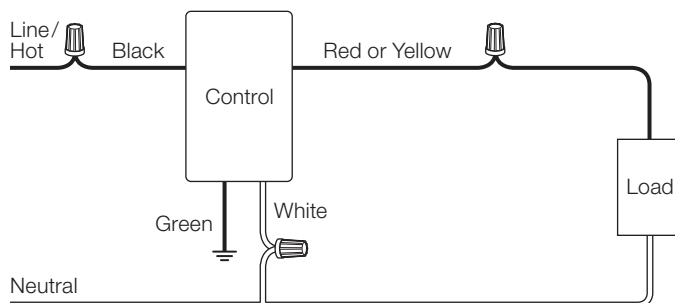


Models:

- NTLV-300-XX**
- NTLV-600-XX**
- NTLV-600-277-XX
- NTLV-1000-277-XX
- NTRP-250-XX

** Use NTLV- models with 120 V~ only

Fan/Light Control

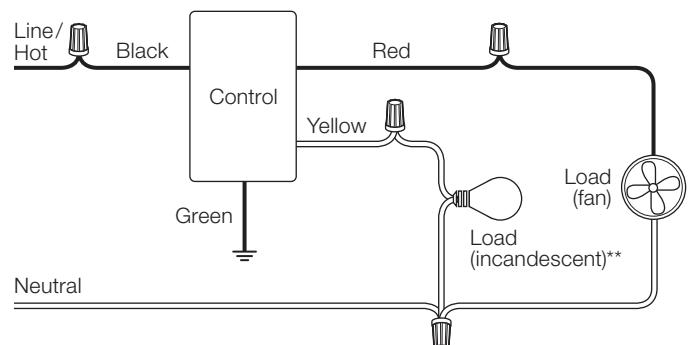

Models:

- NTFS-6E-XX
- NTFS-12E-XX

** Switched full-voltage only

Job Name:


Model Numbers:

Job Number:


Wiring Diagrams: Multi-Location

3-Way Control

Line Side

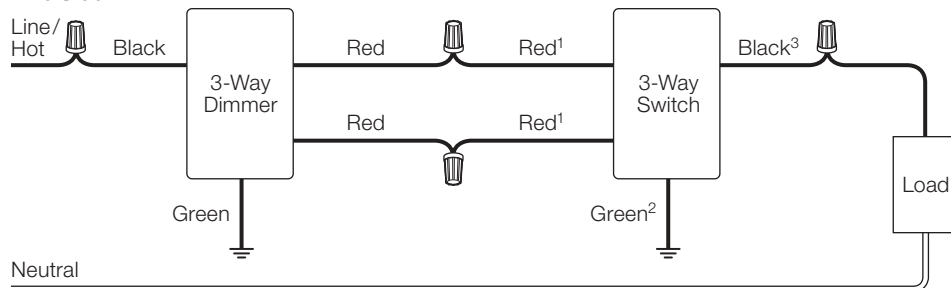

Load Side

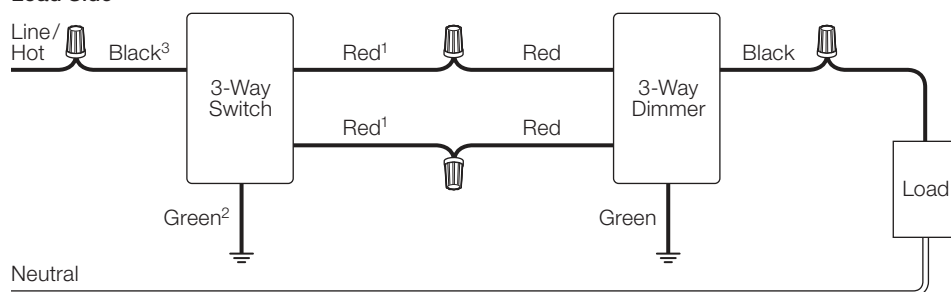

Models:

- NT-603P-XX • NTLV-603P-XX • NT-3PS-XX
- NT-1003P-XX • NTLV-1003P-XX
- NT-1503P-XX • NTLV-1503P-XX

Key

- Ground
- Wire connector

¹ Wire or brass/gold screw terminal*


² Wire or green screw terminal*

³ Wire or copper/black screw terminal*


* Dimmers have wires; switches have screw terminals

4-Way Control

Line Side

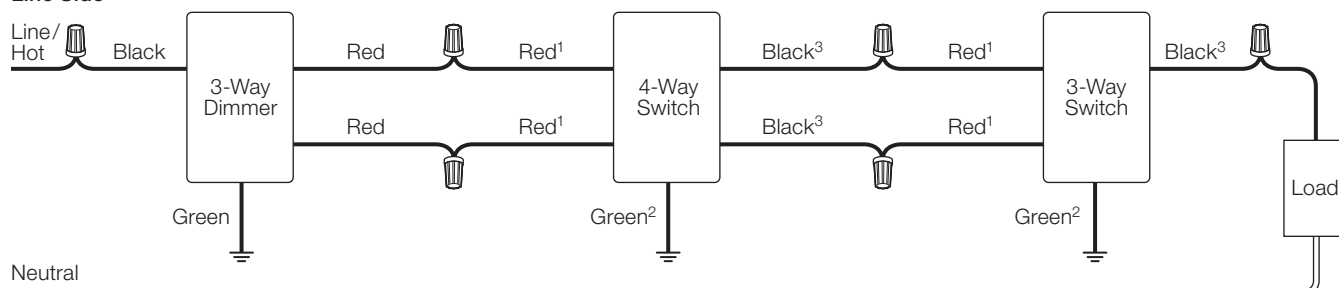

Load Side

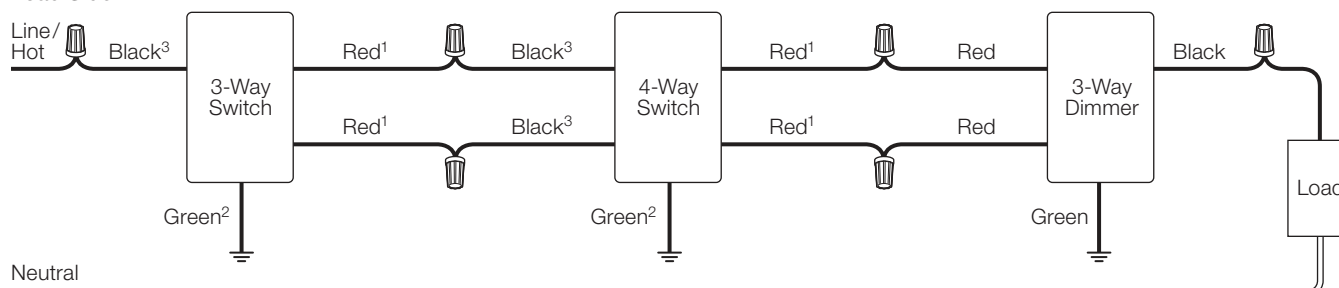

Models:

- NT-603P-XX • NTLV-603P-XX • NT-3PS-XX
- NT-1003P-XX • NTLV-1003P-XX • NT-4PS-XX
- NT-1503P-XX • NTLV-1503P-XX


Job Name:

Model Numbers:

Job Number:

Wiring Diagrams: Accessories

Cable TV Jack

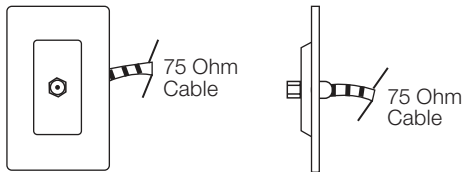

Model:
• NT-CJ-XX

Key

	Ground or isolated ground
	Wire connector
	Screw terminal
P	Protected
NP	Not protected


6-Conductor Telephone Jack

(accepts most 4-conductor jacks)

Jack position	Wire color
1	White
2	Black
3	Red
4	Green
5	Yellow
6	Blue


Model:
• NT-PJ-XX

Tamper-Resistant Dimmable Receptacle (Dual)

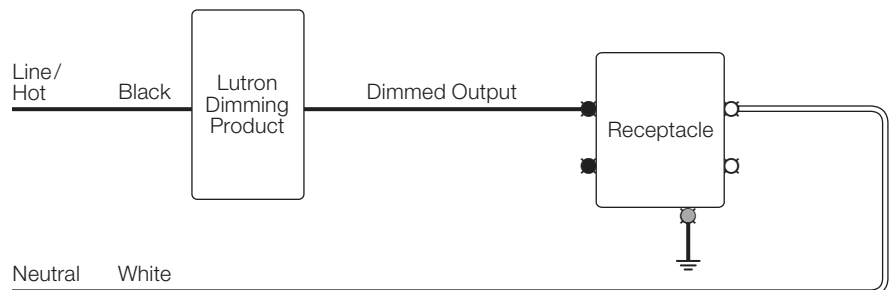


Models:
• NTR-15-DDTR-XX
• NTR-20-DDTR-XX

Receptacle

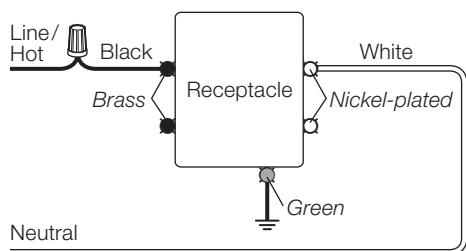


Models:
• NTR-15-XX
• NTR-20-XX
• NTR-15-IG-OR-XX
• NTR-20-IG-OR-XX
• NTR-15-TR-XX
• NTR-20-TR-XX

Tamper-Resistant Dimmable Receptacle (Half)

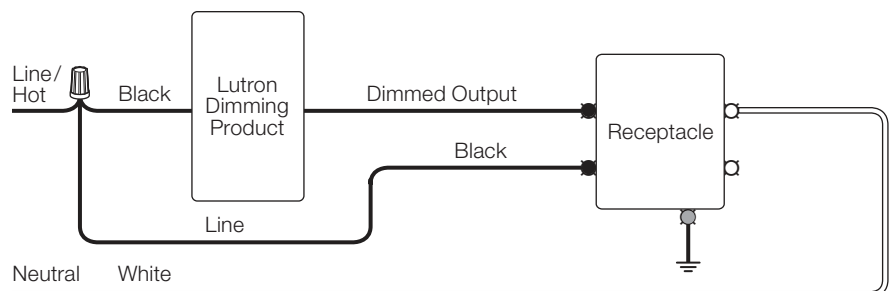

Models:
• NTR-15-HDTR-XX
• NTR-20-HDTR-XX

Tamper Resistant, Self-Testing GFCI Receptacle

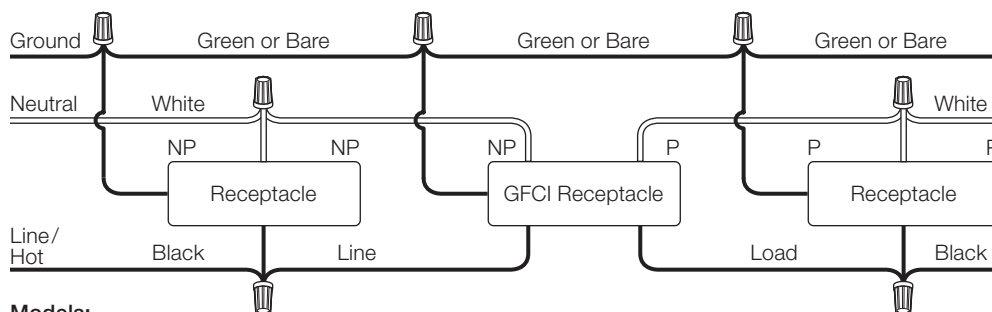

Models:
• NTR-15-GFST-XX
• NTR-20-GFST-XX


Job Name:

Job Number:

Model Numbers:

Wiring Diagrams: NTF- Controls

Single-Pole Control

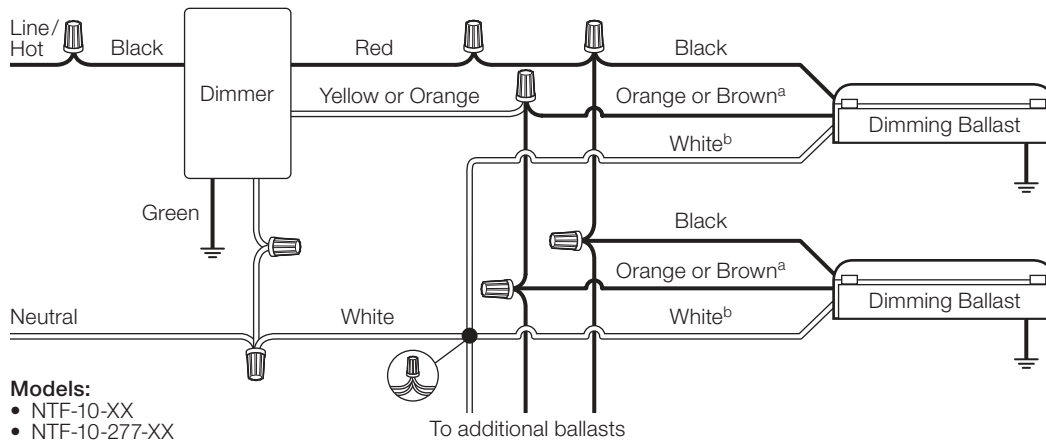

Key

- Ground
- Wire connector
- Typical 4-wire connection

^a Yellow/Blue or Yellow/Green wire when used with magnetic dimming ballasts

^b Must use lamp disconnect sockets with magnetic dimming ballasts

¹ Wire or brass/gold screw terminal*


² Wire or green screw terminal*

³ Wire or copper/black screw terminal*


* Dimmers have wires; switches have screw terminals

3-Way Control

Single-Pole

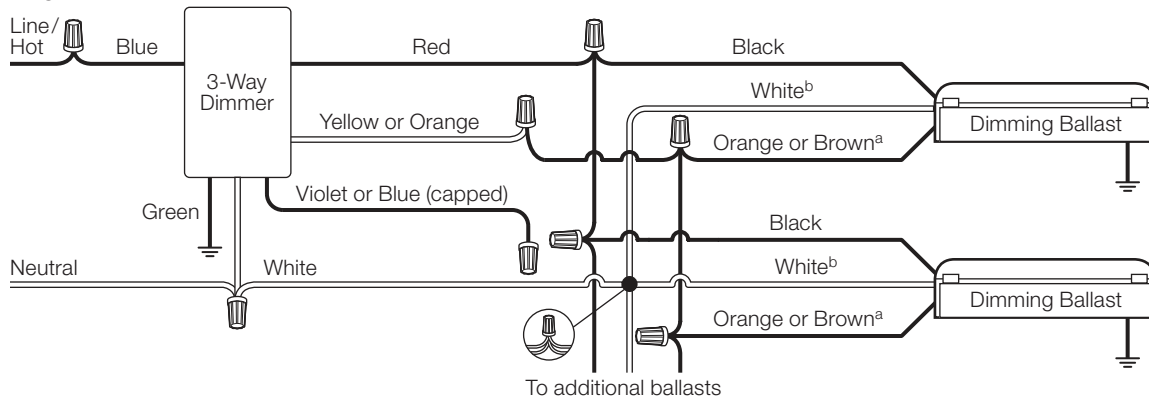

Load Side

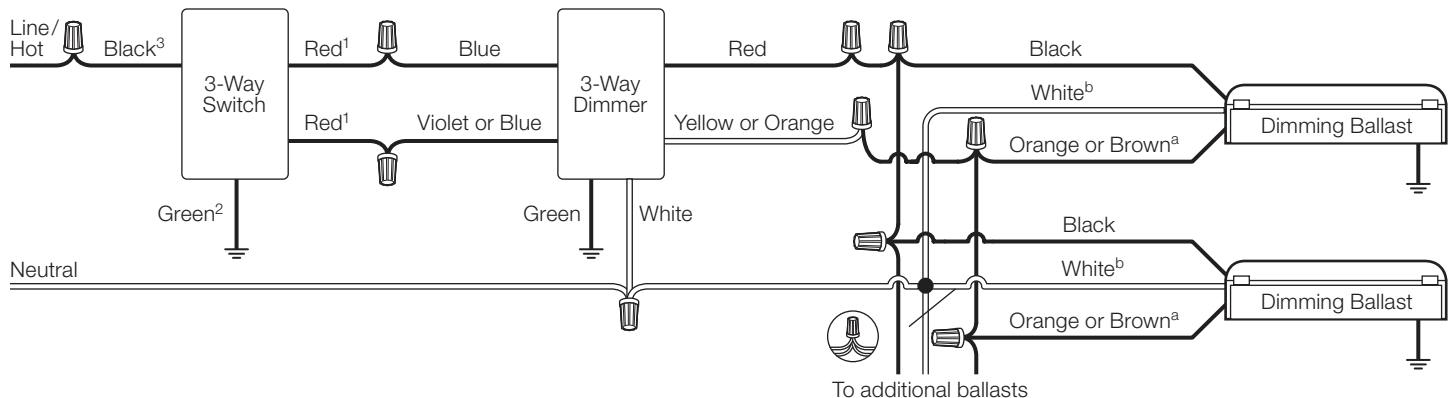

- Models:**
- NTF-103P-XX
 - NTF-103P-277-XX


Job Name:

Model Numbers:


Job Number:

Wiring Diagrams: NTFTU- Controls

Single-Pole Control

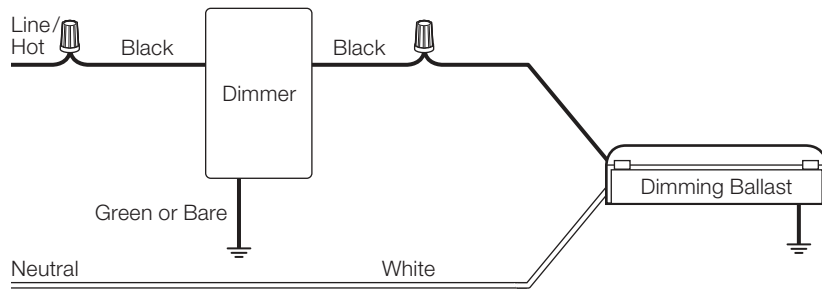
Model:


- NTFTU-5A-XX

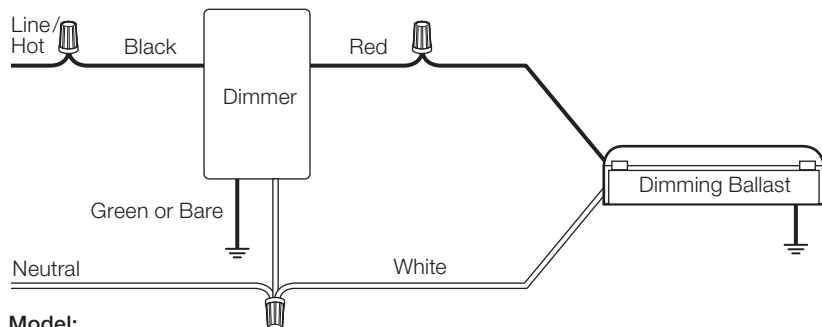
Model:


- NTFTU-5A-277-XX

3-Way Control

Single-Pole

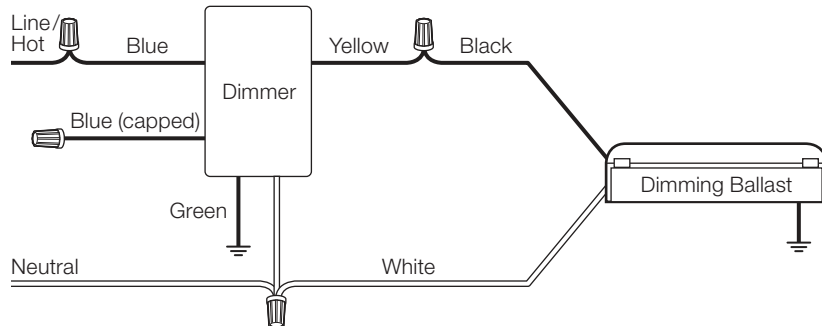

Load Side

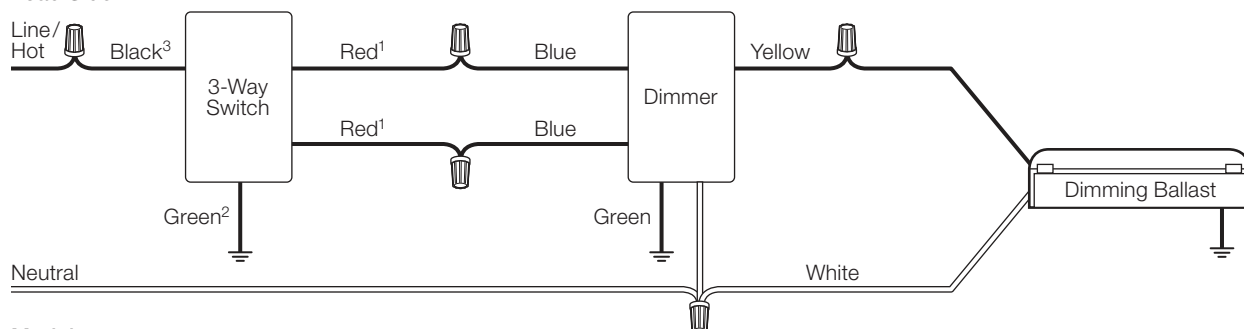
Model:

- NTFTU-103P-277-XX-CPW0196

Key


Ground



Wire connector

¹ Wire or brass/
gold screw
terminal*

² Wire or green
screw terminal*

³ Wire or copper/
black screw
terminal*

* Dimmers have
wires; switches
have screw
terminals

Job Name:


Job Number:

Model Numbers:

Wiring Diagrams: NTSTV- Controls

- The total 0–10 V $\overline{\text{V}}$ control signal wiring for this control should not exceed 500 ft (152.4 m).
- Do not use wire smaller than 20 AWG (0.75 mm²).
- For Class 1 installations, 0–10 V $\overline{\text{V}}$ wires must be run in conduit or approved cable per NEC® or local jurisdiction.
- For Class 2 installations, conduit is typically not required (local code may apply).
- For application with excessive electrical noise, 0–10 V $\overline{\text{V}}$ wires should be run in separate conduit from the mains.

Class 1 Installation

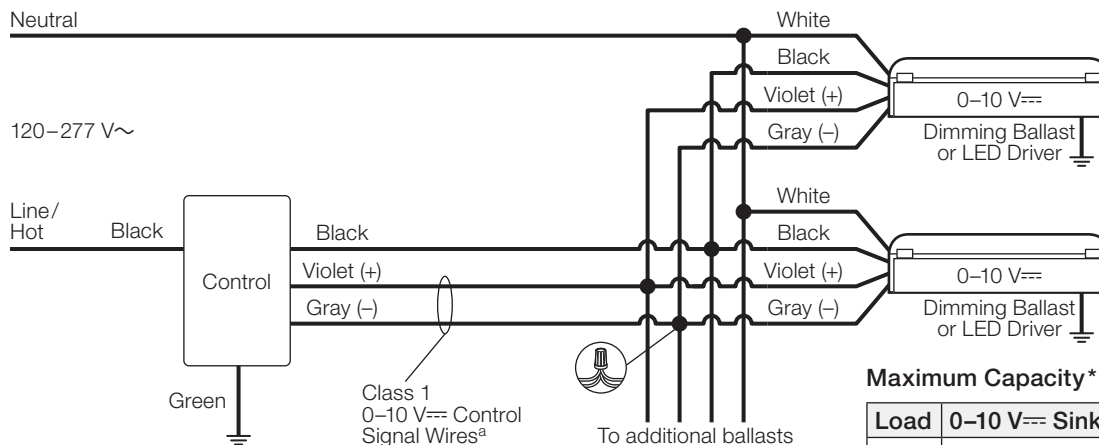

Model:
• NTSTV-DV-XX

Maximum Capacity*

Load	0–10 V $\overline{\text{V}}$ Sink
8 A	30 mA

* Whichever comes first.

Notice

- Lutron is not liable for damage due to miswiring 0–10 V $\overline{\text{V}}$ control signal wires with line voltage.
- Do not run Class 2 wires and line voltage conductors together in the same conduit.

Key

- Ground
- Wire connector
- Wire connector
- Typical 4-wire connection


^a Do NOT connect to line voltage

^b 18 AWG (1.0 mm²) red wires are interchangeable. Connect to either line or load side

^c Green wire may be capped for Class 2 installations ONLY

Class 2 Installation

ON/OFF control using Power Pack (PP-DV or PP-347H)

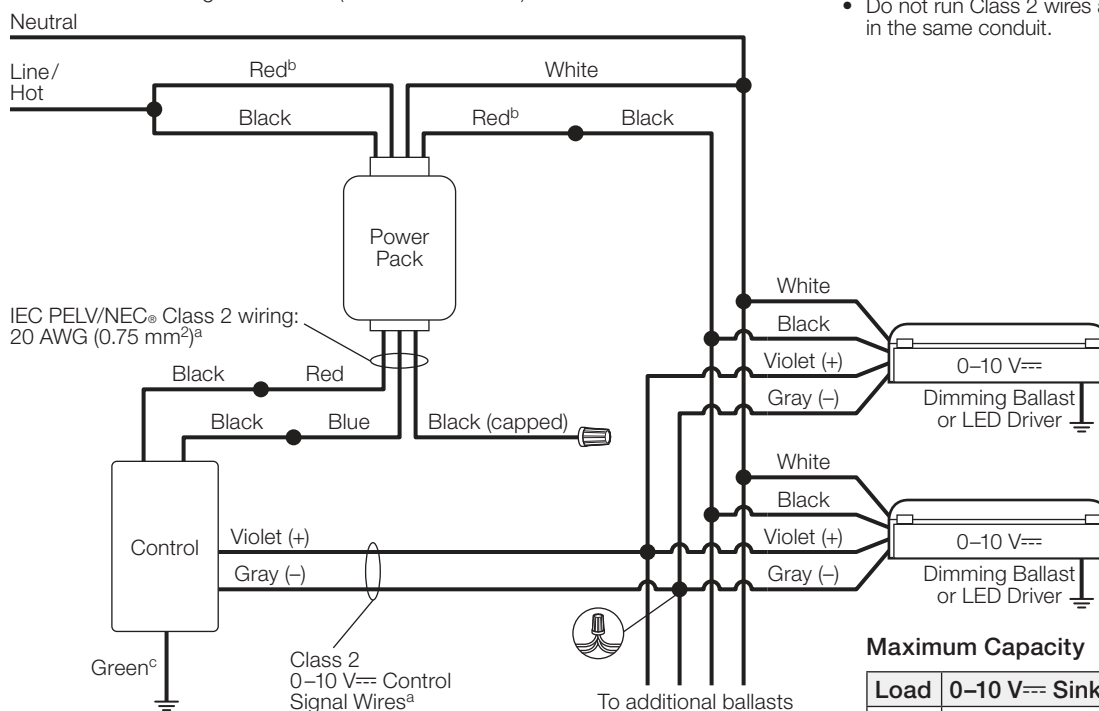

Model:
• NTSTV-DV-XX

Maximum Capacity

Load	0–10 V $\overline{\text{V}}$ Sink
**	30 mA

** See PP- and UPP-Series Power Packs spec submittal, Lutron P/N 369544

LUTRON® SPECIFICATION SUBMITTAL


Job Name:

Job Number:

Model Numbers:

Wiring Diagrams: NTCL- Controls

Hi-lume 1% 2-Wire LTE LED Driver Installation

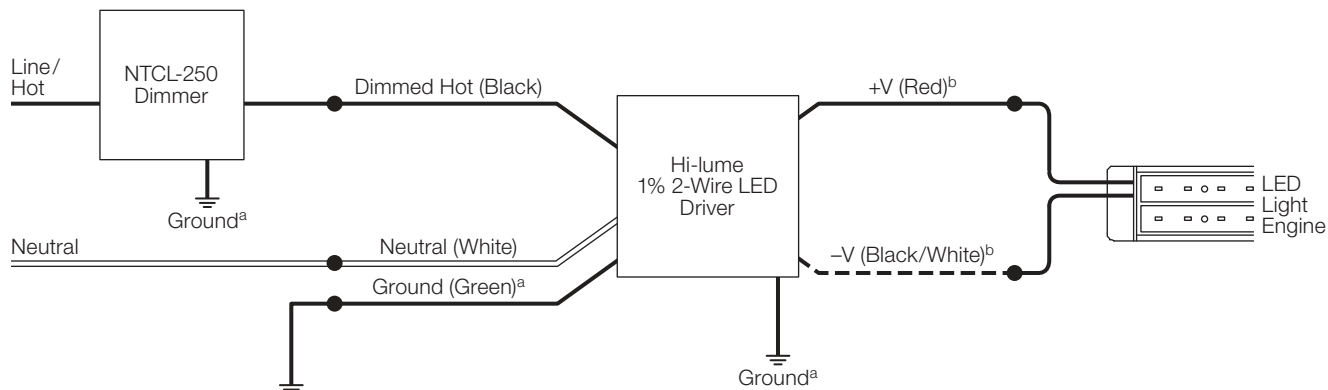
Model:

- NTCL-250-XX

Key


Ground



Wire connector

^a Enclosure and junction box must be grounded in accordance with local and national electrical codes. Ground provided by grounding of junction box or by using the green ground wire connection

^b For maximum driver-to-LED light engine wire length, see **Hi-lume 1% 2-Wire LED Driver (P/N 369543)**

Lutron, Lutron, C•L, Hi-lume, Nova T★, and Tu-Wire are trademarks of Lutron Electronics Co., Inc., registered in the U.S. and other countries.

NEC is a registered trademark of National Fire Protection Association, Quincy, Massachusetts.

UL is a trademark of UL LLC.

Advance and Mark X are registered trademarks of Philips Corporation.

Powersense is a registered trademark of Sylvania Corporation.

Job Name:

Job Number:

Model Numbers: