


REV	DESCRIPTION	BY DATE	APPD
A	RELEASED PER ER7530	DCam 04/14/08	DCam

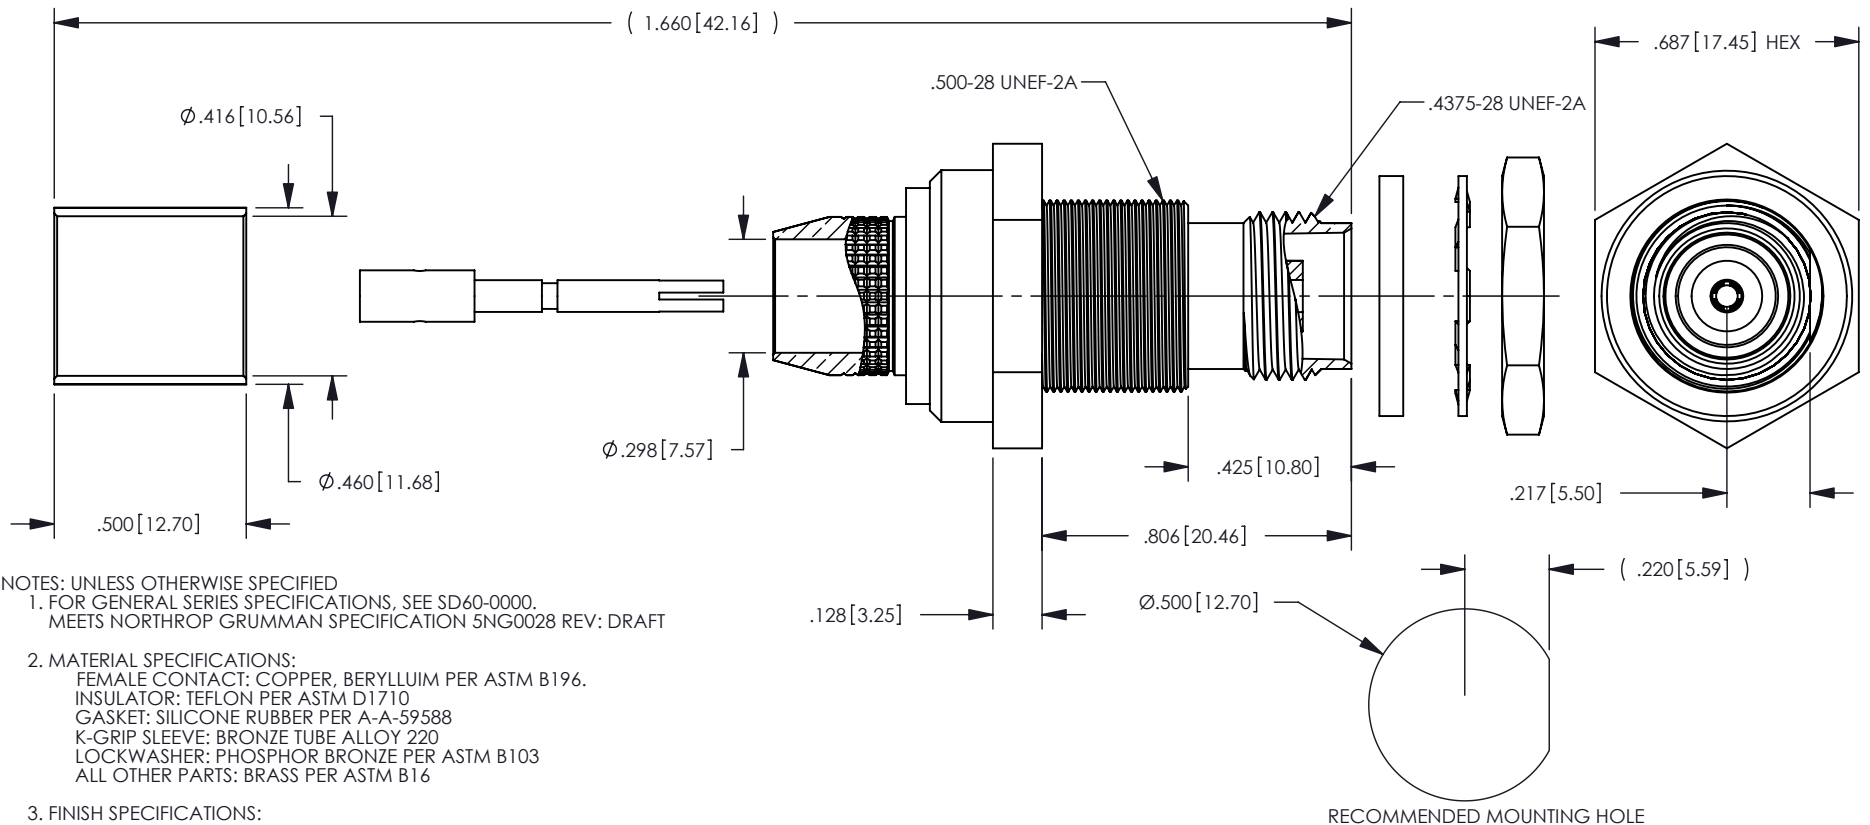

- NOTES: UNLESS OTHERWISE SPECIFIED
- FOR GENERAL SERIES SPECIFICATIONS, SEE SD60-0000.
MEETS NORTHROP GRUMMAN SPECIFICATION 5NG0028 REV: DRAFT
 - MATERIAL SPECIFICATIONS:
FEMALE CONTACT: COPPER, BERYLLIUM PER ASTM B196.
INSULATOR: TEFLON PER ASTM D1710
GASKET: SILICONE RUBBER PER A-A-59588
K-GRIP SLEEVE: BRONZE TUBE ALLOY 220
LOCKWASHER: PHOSPHOR BRONZE PER ASTM B103
ALL OTHER PARTS: BRASS PER ASTM B16
 - FINISH SPECIFICATIONS:
CENTER CONTACT: .000050 MIN GOLD PER ASTM B488 OVER
.000050 MIN NICKEL PER SAE-AMS-QQ-N-290
ALL OTHER METAL PARTS: .000050 MIN NICKEL PER SAE-AMS-QQ-N-290 OVER
.000050 MIN COPPER PER ASTM B734
 - ELECTRICAL SPECIFICATIONS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 500 VRMS
FREQUENCY RANGE: DC TO 11 GHz
 - CRIMP FERRULE, CENTER CONTACT, GASKET, LOCKWASHER AND MOUNTING NUT SHIPPED LOOSE.
 - ASSEMBLE TO CABLE USING CP-480
 - CRIMP USING DIE KTH-2294 (.110 HEX CONTACT; .384 HEX FERRULE)
 - DESIGNED FOR USE WITH NORTHROP GRUMMAN 5NG0032 CABLE.

P/N: 122-57-9

RECOMMENDED MOUNTING HOLE

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .010 [0.26] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 2:1		 Winchester Electronics 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER DRAWING		NORTHROP GRUMMAN TNC BULKHEAD CABLE JACK CRIMP ATTACHMENT	
DRAWN HVN	DATE 03/02/07	APPROVED WPM	DATE 04/14/08
APPROVED DCam	DATE 04/14/08	APPROVED XXX	DATE XX/XX/XX
A		SD122-57-9	
SH1 1 OF 1		REV A	