

# Closet Repair Flange

## Parts List



- |                     |                     |
|---------------------|---------------------|
| A. Flange (2)       | D. Small Washer (2) |
| B. Closet Bolt (2)  | E. Hex Nut (4)      |
| C. Large Washer (2) |                     |

## Tools Needed

- Hex nut driver
- Screwdriver

## Installation Instructions

1. Remove the metal part of the old flange ring.
2. Clean the removal area.
3. Install the repair flange by placing the half circles on either side of the toilet flange and lining up the closet bolt slots.
4. If needed, use screws and the additional screw holes to attach the repair flange to the floor.
5. Install the closet bolts with the small washers and two hex nuts (See image).
6. Install a wax ring and reset the toilet, using the two large washers and two hex nuts to secure the closet bolts to the toilet.

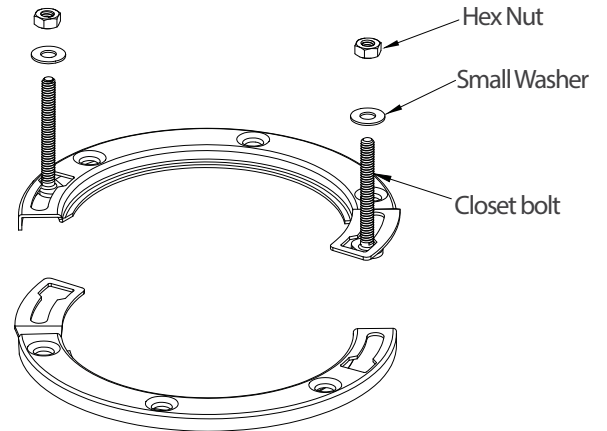

Large washers and hex nuts  
for toilet reset