



## IMPORTANT SAFEGUARDS

WHEN USING ELECTRICAL EQUIPMENT, BASIC SAFETY PRECAUTIONS SHOULD ALWAYS BE FOLLOWED, INCLUDING THE FOLLOWING:

### WARNING:

1. Risk of electrical shock. Disconnect power at the fuse or circuit breaker before installing or servicing.
2. No user-serviceable parts are inside. To avoid electrical shock, do not disassemble the product.
3. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
4. Risk of fire or electrical shock. Install this kit only in luminaires that have the construction features and dimensions shown in the photographs and/or drawings.
5. Do not expose wiring to the edges of sheet metal or other sharp objects to prevent wiring damage or abrasion.
6. Do not use this equipment for anything other than its intended use.
7. Disconnect power before installing the product or servicing it.


### Attention:

1. Turn the power off before inspection, installation, or removal.
2. May be installed with direct contact to insulation.
3. Use only on 120Vac, 60Hz circuits.


### SAVE THESE INSTRUCTIONS

### READ AND FOLLOW ALL SAFETY INSTRUCTIONS

## What's In The Box

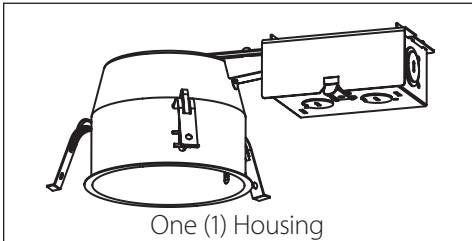

## Tools Needed



To complete installation only a saw will be needed.


## Installing the Housing




Make sure all power is turned off before beginning installation

1 Carefully unpack the housing from its packaging. Inspect product for defects due to shipping.


2 Cut a 4 3/8" hole into the ceiling. Provide electrical service, pass cable through opening and connect the building power to the fixture in the housing junction box per the wiring diagram.

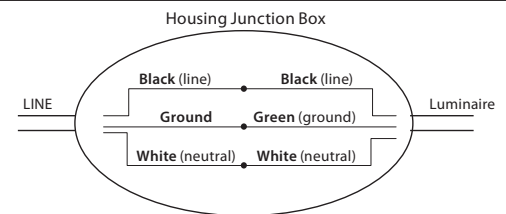

3 Insert the remodel housing into the ceiling, junction box first. Hold fixture up against ceiling and push clip through housing slot.



4 Lock the fixture in place, push flat portion of clip against side of can.

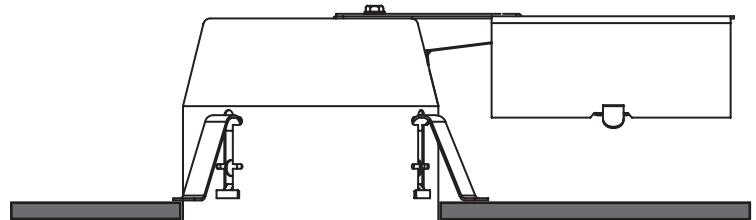

NOTE: In areas where excessive ceiling vibration can occur, we suggest you use a #1/4-14 x 1/2" pan head sheet metal screw to further lock the spring clips against the fixture housing. Drive the screw through the hole in the spring clip and into the housing slot. To remove the housing from the ceiling, pull down on the clip.

### NICOR General Product Warranty

GENERAL PRODUCT WARRANTY: Each NICOR product will be free from defect in materials and workmanship for a period of one (1) year from the date of delivery to the end-user. Powder Coat paint finish on products, other than natural aluminum or brass, will not exhibit cracking, peeling, excessive fading, or corrosion during the warranty period. Exceptions apply as defined in each NICOR product's specification sheets, which are incorporated by reference herein. Warranty does not cover improper installation, operation, alterations, power surges, overheating due to external conditions, or acts of nature including but not limited to lightning strikes.

### POLE WARRANTY: Each NICOR Pole will be free from defect in materials and workmanship for a period of

(1) year from the date of delivery to the end-user. Powder Coat paint finish on products, other than natural aluminum or brass, will not exhibit cracking, peeling, excessive fading, or corrosion during the warranty period. Poles must be installed by a properly insured and licensed contractor, using the supplied anchor bolts and mounting templates. Using a pole product in any manner other than as disclosed in the Application Specification automatically voids the warranty and may cause failure resulting in injury, death, or significant property damage.

ALL NICOR WARRANTIES APPLY ONLY TO NICOR PRODUCTS THAT HAVE BEEN PURCHASED FROM AN AUTHORIZED NICOR DISTRIBUTOR; WHO PURCHASED THE PRODUCT DIRECTLY FROM NICOR; THE PRODUCT WAS NEW AND IN AN UN-OPENED NICOR PACKAGE AT THE TIME OF INSTALLATION; AND WAS INSTALLED BY A LICENSED ELECTRICIAN OR UNDER THE SUPERVISION OF A LICENSED ELECTRICIAN.