

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

Provides general illumination in commercial and residential applications. Ideal for use in closets, foyers, hallways, corridors, living rooms, bedrooms, offices, stairways and more.

CONSTRUCTION

Designed with nearly every decor in mind, the simple chrome accent on a matte white acrylic diffuser offers simple, timeless styling.

OPTICS

11" unit produces 1,170 lumens and 14" unit produces 1,640 lumens, both at 50,000 hours life.

ELECTRICAL

Fixture operates at 120 volts, 60Hz. 11" unit standard input = 16 watts, 73 lumens per watt. 14" unit standard input = 24 watts, 68 lumens per watt.

Works with most standard incandescent dimmers (see list of approved dimmers).

INSTALLATION

All mounting hardware included for mounting to a standard junction box.

LISTINGS

UL Listed to US and Canadian standards and suitable for damp locations. ENERGY STAR® certified.

WARRANTY

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions


NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Decorative Indoor

Bandon LED Flush Mount



Specifications

	11"	14"
Depth:	3-3/16 (8.1)	3-13/16 (9.7)
Diameter:	11-3/16 (28.4)	13-14/16 (35.3)
Weight:	1.5 lbs.	2.0 lbs.

All dimensions are inches (centimeters) unless otherwise indicated.

ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

Example: FMBANL 14 20830 KR

Series	Module/CRI	Color temperature	Finish
FMBANL 11 LED flush mount 11" diameter	148 >80	40 4000K	KR Chrome
FMBANL 14 ¹ LED flush mount 14" diameter	208 >80	30 3000K	





Replacement Parts: Order as separate catalog number.	
DFMBANL 11	11" acrylic diffuser
DFMBANL 14	14" acrylic diffuser

Notes

¹ FMBANL 14 only available in 20830.

LED Flush Mount Bandon

LIGHTING FACTS

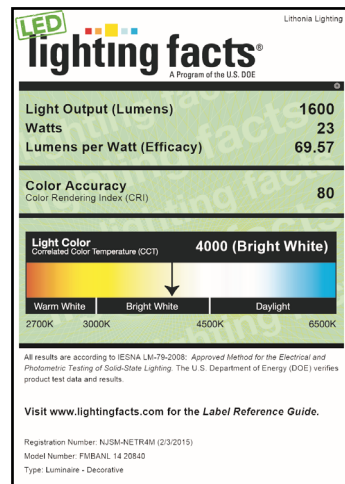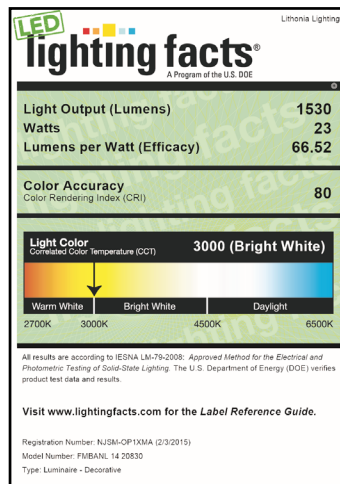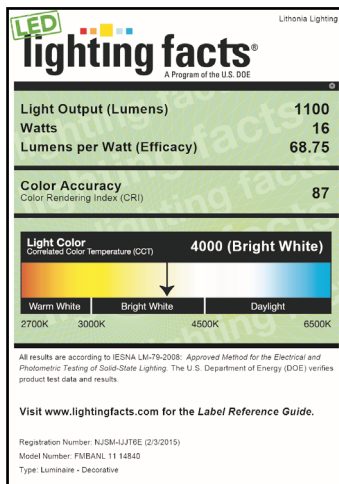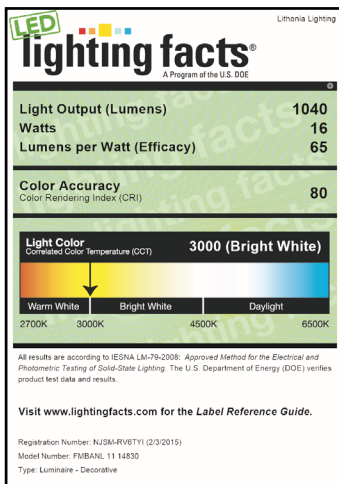

PHOTOMETRICS

To request a photometric data report, please contact factory.

SUGGESTED DIMMERS

The FMDDHL is designed to operate with most standard Triac Based dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part number(s)
Leviton	6633P
	IPL06
	6674P
	IPE04
	Trimatron 600W
Lutron	DVELV 300P
	SkyLark 300P
	NTELV 300
	NLV 600
Synergy	ISD 600 I 120