


INVACARE® CONCENTRATOR ACCESSORIES



Invacare® PreciseRx™ Pediatric Flowmeter



Invacare® Check O2 Plus™ Oxygen Analyzer

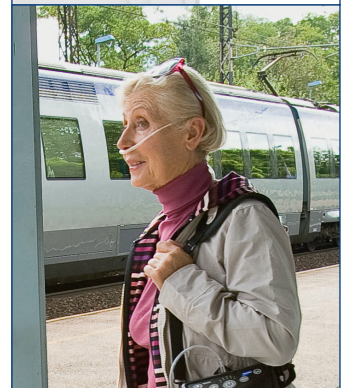

The **Invacare® Check O₂ Plus™ Oxygen Analyzer** is a single economical instrument that is designed to report operating parameters necessary for performing oxygen concentrator checks. It is an efficient and cost-effective analyzer designed with technicians in mind. It checks oxygen concentration, flow rate and patient outlet pressure on any oxygen concentrator. What's more, it requires no routine calibration, and there's no fuel cell to replace. The Invacare Check O₂ Plus Oxygen Analyzer is three analyzers rolled into one. The **Invacare® PreciseRx™ Pediatric Flowmeter** adapts Invacare oxygen concentrators for low-flow usage. This means you can now use this efficient oxygen modality for pediatric applications.

Invacare® PreciseR_x™ Pediatric Flowmeter Features

Delivers flow rates as low as $\frac{1}{16}$ LPM or 50 cc/min. with or without humidifier bottles

Delivers precise low-flow oxygen delivery: $\frac{1}{16}$ - $\frac{3}{4}$ LPM or 50 - 750 cc/min.

Easy to install—no tools required

Requires no permanent concentrator modification

Prevents back pressure into concentrator

Compatible with or without humidifier bottle

PreciseR_x Pediatric Flowmeter includes: flowmeter, tubing, connectors and humidifier bottle (flow range $\frac{1}{16}$ - $\frac{3}{4}$ lpm).

Invacare PreciseR_x pediatric flowmeter is designed for use exclusively with Invacare oxygen concentrators. The input pressure is 5 psi (34 kPa).



Invacare® Check O₂ Plus™ Oxygen Analyzer Features

Measures three parameters, eliminating the need for multiple instruments: oxygen purity, flow rate and patient outlet pressure

Features simple two-button operation and self-diagnostics

Two AA batteries provide over 16,000 readings

Shuts off automatically to extend battery life

Requires no in-field calibration. Includes connecting tube and protective boot

Check O₂ Plus Oxygen Analyzer includes connecting tube and protective boot



Model #	Weight	Quantity Per Case	Oxygen Flow	Pressure Range	Oxygen Range	Operating Temperature	Limited Warranty
IRC450	6.4 oz.	1	0-10 LPM ± 0.2LPM	.5-50 PSI ±.5%	21%-95.6% ±1.5%	59°-104° F (15°-40°C)	3 Years
IRCPF16	2.4 lb. (shipping weight)	1	0- $\frac{3}{4}$ LPM 0-750 cc/min	5 ± 0.5 PSI INPUT		50°-95° F (10°-35°C)	1 Year

Invacare Corporation
www.invacare.com

USA
One Invacare Way
Elyria, Ohio
44035-4190
(800) 333-6900

Canada
570 Matheson Blvd. E., Unit 8
Mississauga, Ontario
L4Z 4G4 Canada
(800) 668-5324

©2017 Invacare Corporation. All rights reserved.
Trademarks are identified by the symbols ™ and ®. All trademarks are owned by or licensed to Invacare Corporation unless otherwise noted.
Specifications are subject to change without notification. Form No. 11-191 Rev. 08/17 170830

