


PART#: 16/2 k5500

PART#: k5500

DESCRIPTION: 2C/16 AWG 65 STRAND OXYGEN FREE COPPER
SPEAKER CABLE,PVC JKT

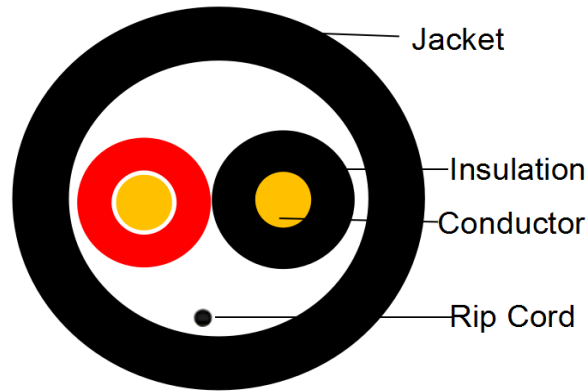

Regulatory

UL : UL 444 & UL 13,Type (UL) CMR/CL2R c(UL)

EU RoHS 2011/65/EU Compliant

EN50575: 2014 REACTION TO FIRE CLASS Eca

Application: Speaker cable

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	16AWG X 2C(2.11mm ²)
	Construction	65/0.16mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.30mm
	AVG.Thickness	0.33mm
	Diameter	2.0mm +/-0.10mm
	Colors	Black & Red
Jacket	Material	PVC
	Min.Thickness	0.54mm
	AVG.Thickness	0.60mm
	Diameter	5.0mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius	Min 15D/75mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Conductor Resistance	Max 15.5 ohm/km at 20°C

Insulation Resistance	Min 50MΩ*km at 20°C		
Dielectric Strength	Min AC1.5KV		
Rated Voltage	Max 80Volts		
Marking:			
Packaging:			
Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
6.7kgs/14.771lbs	280X260X280	500ft/ Box	48/64