

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	07/23/10	TRC

ENGINEERING DATA

ELECTRICAL:

FREQUENCY RANGE: DC TO 33 GHz
VSWR MAX: 1.15:1

MECHANICAL:

INTERFACE PER IEEE 287

MATERIAL:


HOUSING/COUPLING NUT: STAINLESS STEEL
CONTACTS: BERYLLIUM COPPER
SUPPORT BEAD: PEI




FINISH:

HOUSING/COUPLING NUT: PASSIVATED
CONTACTS: GOLD PLATED

NOTES:

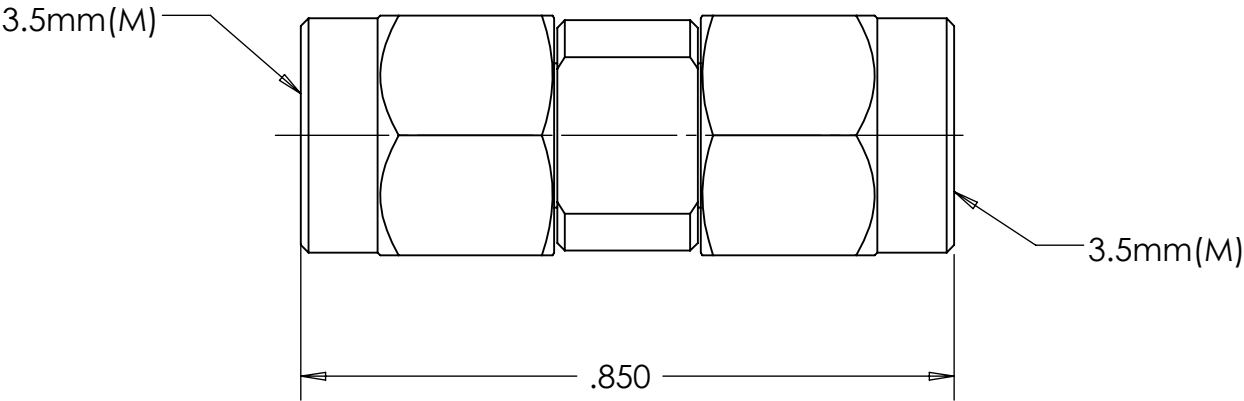1. ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.



MATERIAL	DO NOT SCALE DRAWING	DRAWN TRC	DATE 07/16/10	<div>TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960 The Custom Interconnect Leader™</div> <div>TITLE: CONNECTOR, COAXIAL 3.5MM(M) TO 3.5MM(M) ADAPTER</div>		
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2° MACHINED SURFACES: 	ENG APPR. TRC	DATE 07/21/10			
		MFG APPR. DF	DATE 07/21/10			
		OTHER APPR. AM	DATE 07/20/10			
COMMENTS:		THIRD ANGLE PROJECTION		SIZE B	DWG. NO. TRU-11211	REV -
surface area: sq inch weight: lbs				CAGE CODE: 92180	SCALE: 4:1	SHEET 1 OF 1