


## 6-OUTLET SURGE PROTECTOR

CSB6WS

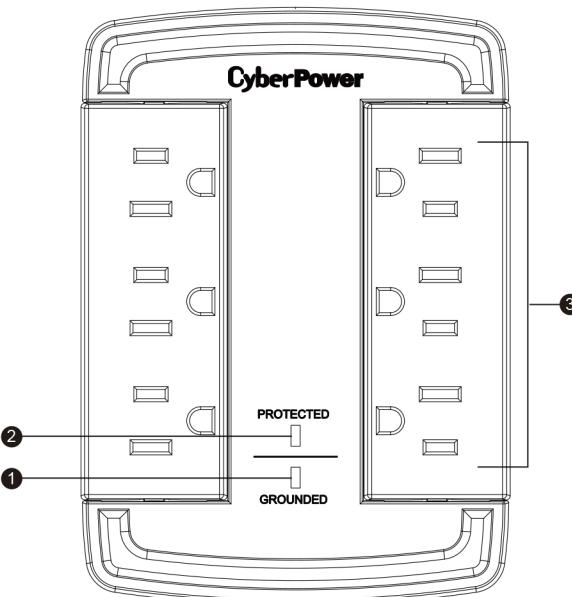

### FEATURES

#### 1. Grounded LED Indicator

Illuminated when the surge protector is properly grounded.

#### 2. Protected LED Indicator

Illuminated when the surge protection feature is working properly.

#### 3. Standard Grounded Outlets (6)

### SPECIFICATIONS

Model Number:

CSB6WS

Outlets:

Standard Grounded Outlets (6)

Surge Protection:

1800 Joules

Electrical Rating: 125V/15A/1875W

UL1449 4th/800V(L-N, L-G, N-G)

UL Clamping Voltage: 45,000 A

Maximum Peak Current:

3 AC Lines Protected:

L-N: 15,000 A; L-G: 15,000 A;

N-G: 15,000 A

Response Time:

Less than 1 nanosecond

**WARNING:** This product can expose you to chemicals including vinyl chloride and bisphenol A (BPA), which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### CAUTION

#### TO REDUCE THE RISK OF ELECTRIC SHOCK:

Use only in dry locations and only indoors.

**DO NOT** plug into another relocatable power tap.

**DO NOT** "daisy chain" surge protectors.

**DO NOT** use with any aquarium equipment.

**DO NOT** use if properly grounded outlets are not available.

**DO NOT** install this device if there is less than 10 meters (30 feet) of wire between the electrical outlet and electrical service panel.

**DO NOT** use for medical or life support equipment. This device features an internal protection that will disconnect the surge protective component at the end of its useful life, but it will maintain unprotected power to the load.

### TROUBLESHOOTING

If the GROUNDED indicator does not light when you plug in the surge protector, move the surge protector to a different grounded three-prong AC outlet. If the GROUNDED indicator still does not light and the surge protector appears to be working correctly, your outlets may not be properly grounded and should be repaired by a professional electrician.

If the PROTECTED indicator does not light, the surge protector's outlets are no longer protected from power surges or spikes. The surge protector may have received a power surge or spike beyond its specified limits that have overloaded the protection circuitry and rendered it inactive. The surge protector has protected your connected equipment as designed, but it will not protect against future surges and spikes. It should be replaced.

### FOR MORE INFORMATION

Visit [CyberPowerSystems.com](http://CyberPowerSystems.com) for more information regarding:

- Product information and certifications
- Product warranty
- Connected equipment guarantee

### TECHNICAL SUPPORT

Visit: [CyberPowerSystems.com/support](http://CyberPowerSystems.com/support)

Toll-Free: 1-877-297-6937

© 2025 Cyber Power Systems (USA), Inc. All rights reserved.

CyberPower and the CyberPower logo are trademarks of Cyber Power Systems, Inc., and/or affiliates, which are registered in many countries and regions. All other trademarks are the property of their respective owners.