



Drill A,B,C,D holes with size $\Phi 8 \times D 45 \text{mm}$. Use hammer to knock wall anchor(5) into wall completely.



Insert the long screw(2) through bushing(4) then into the wall anchor(5), make sure bushing(4) is firmly connected to the wall.

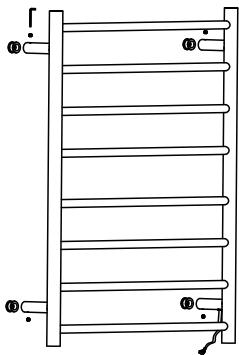

Connect the wall bracket(1) to the bushing(4), and tighten the set screws by hex key wrench(6). Plug in then start to work.

TOWEL WARMER / Wall Mount Install Guide

Have questions? Visit us at www.ANZZI.com or call 1-844-44-ANZZI for more info!

Before using this product, please read the following instructions carefully and keep this pamphlet for future reference.

About the Product:

This heated towel rail is designed for drying towels or clothes, it has a surface stabilized temperature of 40°C - 50°C (104°F - 122°F) and it is used in household bathrooms and kitchens. This appliance is used under the voltage of 110V-120V AC, is manufactured according to UL/CUL standard.

Safety Precautions:

1. The supplied power system which is connected to the towel rail must be used with a ground fault circuit interceptor plug.
2. This product is supplied with the relevant, fitted three pin socket and three-wire cable, to avoid any risks or danger it must be properly grounded.
3. Any change of or repair to the damaged internal wires must be done by a qualified technician who is deemed qualified by the industry standard. When any external wire fittings are required, the power must be cut off completely.
4. Any hard scrubbing or scratching on the product surface is strictly prohibited,


Warning:

1. Only use for drying textiles which have been dampened by water.
2. The original wire cannot be replaced, when it is unworkable, the whole product should be replaced.
3. If the appliance is supplied from an extension cord set or electric portable outlet device, then the extension cord set or electric portable outlet device should be positioned so that it is not subject to splashing or excessive moisture.


Note:

1. In the event of any technical statistics difference, please refer to the actual product.
2. Please wipe the towel rail with a soft dry cloth when cleaning it.


TOOLS

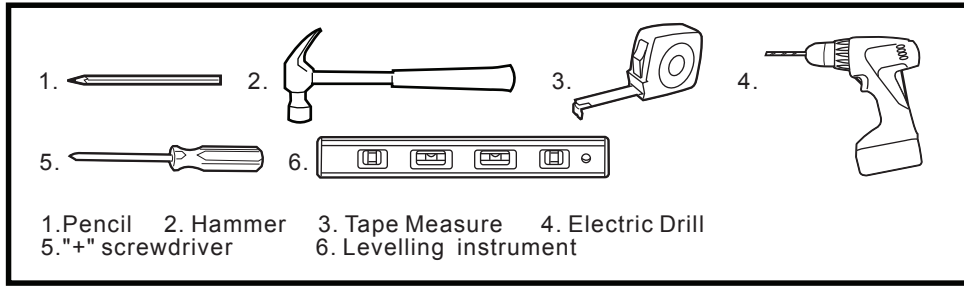


Accessories List

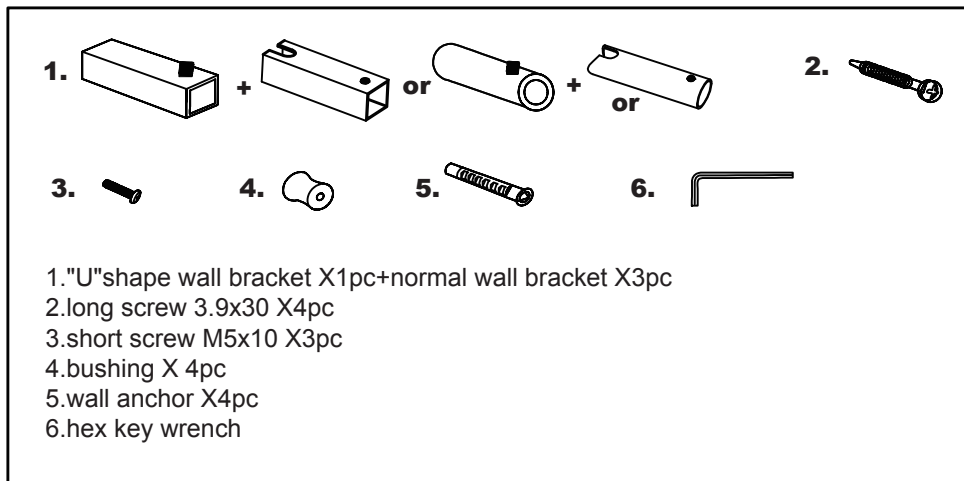


Installation Steps

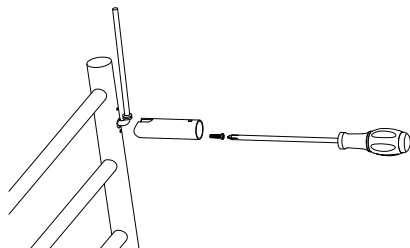


Take out screw on the vertical bar, then insert this screw through "U" shape wall bracket (1) and connect it to the vertical bar. Make sure the "O" circle must be connected to "U" shape.

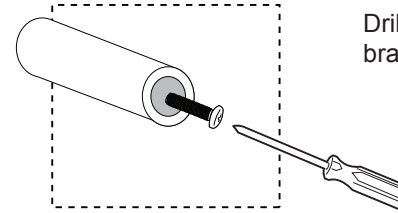


Drill the short screw(3) through the normal wall bracket(1).



Screw down the short screw(3) to firmly connect the normal wall bracket(1) to the vertical bar. Note that the set screw on the wall bracket should towards the floor when the unit is installed.



Use tape to measure the distance between these four holes, and get the data AB, AC, CD and BD



Mark A,B,C,D according to the distance. Suggest it is installed at least 600mm above the floor level.

Try to install the towel warmer and use the levelling instrument to test the levelness and perpendicularity.