

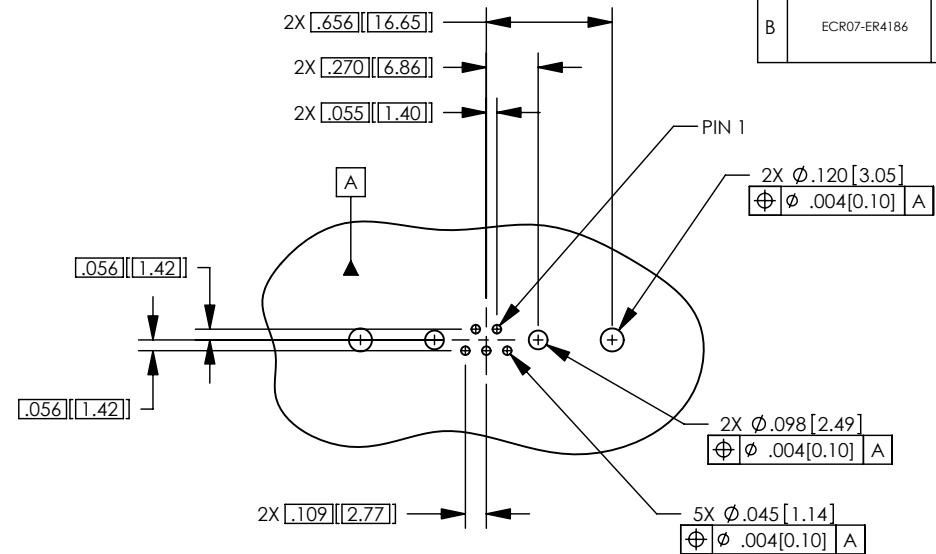
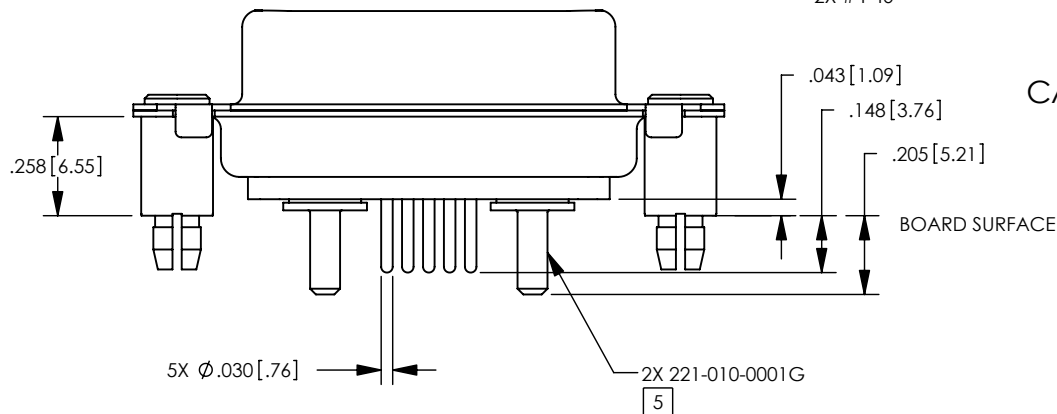
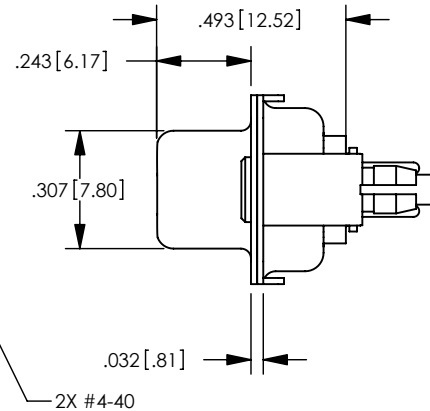


NOTES: UNLESS OTHERWISE SPECIFIED

1. FOR GENERAL SERIES SPECIFICATIONS, SEE SD10-0000.
2. MATERIAL SPECIFICATIONS:
SHELL: STEEL PER ASTM A568
INSULATOR: HIGH TEMPERATURE THERMOPLASTIC
STANDOFF: BRASS PER ASTM B16
SEE CONTACT SALES DRAWING FOR CONTACT SPECIFICATIONS
3. FINISH SPECIFICATIONS:
SHELL: ZINC PLATE TRIVALENT CHROMIUM PER ASTM-B633 TYPE II
INSULATOR: BLACK
STANDOFF: ZINC PLATE AND YELLOW CHROMATE PER ASTM-B633, TYPE II
4. STANDOFF FORCES:
36 LBF. MAX INSERTION AND 28 LBF. MIN. RETENTION
5. SEE CONTACT SALES DRAWING FOR CONTACT SPECIFICATIONS

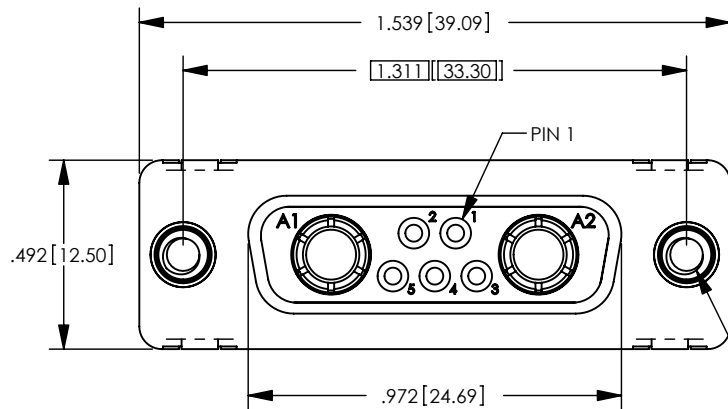

RECOMMENDED HOLE
LAYOUT; PCB FOOTPRINT SHOWS
COMPONENT SIDE



CATALOG P/N: RM7W2S-1022

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: 2:1				Winchester Electronics Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492			
CUSTOMER DRAWING				RM7W2 D-SUB RECEPTACLE			
DRAWN RDG	DATE 11/10/06	APPROVED WPM	DATE 11/10/06	A SDRM7W2S-1022 SH 1 OF 1 REV B			
APPROVED XXX	DATE XX/XX/XX	APPROVED XXX	DATE XX/XX/XX				