


LED HANGING LIGHT PENDANT

IMPORTANT SAFETY INSTRUCTIONS AND INSTALLATION GUIDE

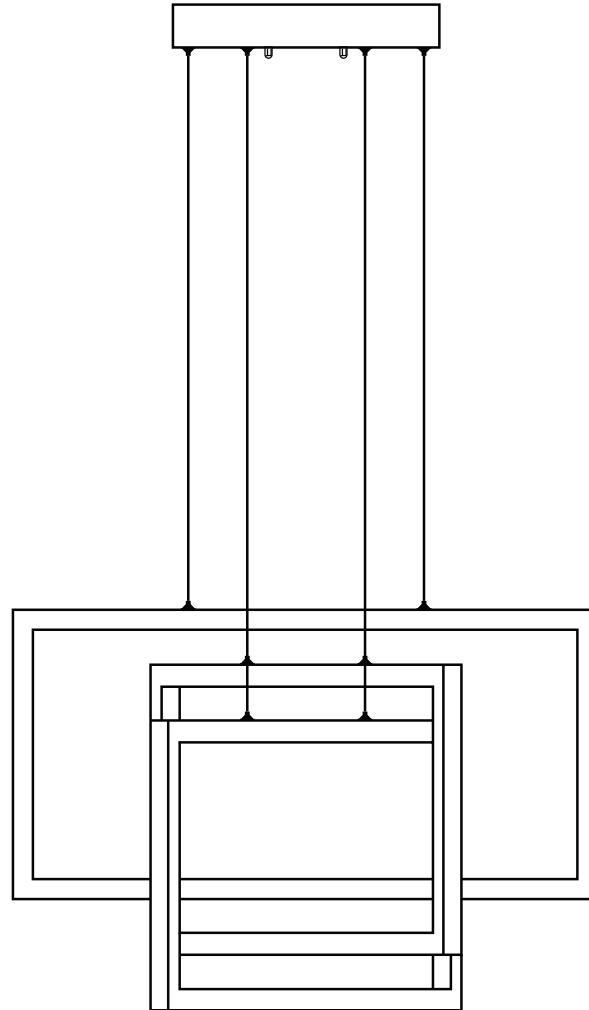

**IMPORTANT, RETAIN FOR FUTURE REFERENCE:
READ CAREFULLY**



Table of Contents

Safety Information	2
FCC Statement	2
Warranty	2
Pre-Assembly	3
Installation	4

Safety Information

For your safety, always remember to:

- Turn off the power supply at the fuse or circuit breaker box before you install the fixture.
- Ground the fixture to avoid potential electric shock and to ensure reliable starting.
- Double-check all connections to be sure they are tight and correct.
- Wear rubber soled shoes and work on a sturdy wooden ladder.
- Account for small parts and discard packing material, as these may be hazardous to children.

This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, check your local electrical code or consult a qualified electrician.

MIN 90 °C SUPPLY CONDUCTORS

FCC STATEMENT

Supplier's Declaration of Conformity:
47 CFR § 2.1077 Compliance Information
Responsible Party: Feit Electric Company
4901 Gregg Road, Pico Rivera, CA 90660, USA
www.feit.com
Unique Identifier: CEPN/BLK, ITM. / ART. 1783498

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

Limited Warranty

This product is warranted to be free from defects in workmanship and materials for up to 3 years from date of purchase. If the product fails within the warranty period, please contact Feit Electric at info@feit.com, visit feit.com/contact-us or call 1-866-326-BULB (2852) for instructions on replacement or refund. REPLACEMENT OR REFUND IS YOUR SOLE REMEDY. EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTIES ARE LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IS HEREBY EXPRESSLY EXCLUDED. Some states and provinces do not allow the exclusion of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state or province to province.

Product Specifications

120VAC, 60Hz
Wall Dimmable
Suitable for Damp Locations



CAUTION: Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.



CAUTION: Consult a certified electrician to ensure correct branch circuit conductor.



WARNING: RISK OF SHOCK. House electric current can cause painful shock or serious injury unless handled properly.



CAUTION: RISK OF FIRE. Before installing your lighting fixture, thoroughly review this installation manual. If you do not have sufficient electrical wiring experience have your fixture installed by a certified electrician. All electrical connections must be in accordance with Local and National Electrical Code (NEC) Standards. Reliable operating temperature is 0°F –120°F. Suitable for Damp Locations. For more information including dimmer compatibility visit www.feit.com.

NOTICE: All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a certified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

TOOLS REQUIRED (NOT INCLUDED)




Phillips
Screwdriver

HARDWARE INCLUDED



NOTE: Hardware not shown to actual size.



AA



BB



CC



DD



EE



FF



GG



HH

Part	Description	Quantity
AA	Fixture	1
BB	Mounting Plate	1
CC	Mounting Plate Screws	2
DD	Junction Box Mounting Screws	2
EE	Fixture Mounting Finials	2
FF	Rubber Washers	2
GG	Wire Nuts	3
HH	Safety Cable	1


Installation

1 Turning Off the Power

Turn the power OFF at the switch and fusebox or the circuit breaker.


2 Removing the Mounting Plate from the Canopy

To separate the mounting plate (BB) from the canopy, remove the mounting finials (EE) and the rubber washers (FF).

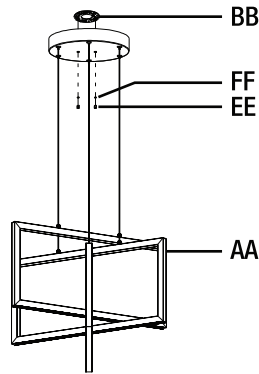


3 Installing the Mounting Plate

Use the junction box mounting screws (DD) to secure the mounting plate (BB) to the junction box.




4 Identifying the Wires

Black - Hot/Live
White - Neutral
Green or Bare Copper - Ground




5 Connecting the Safety Cable

Secure the safety cable (HH) from the canopy to the mounting plate (BB).

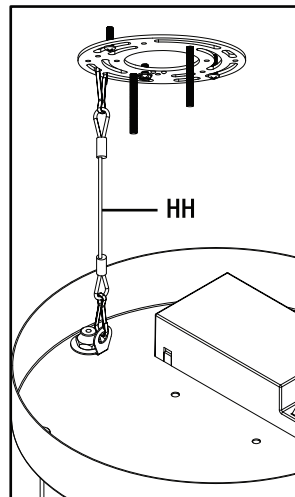


6 Connecting the Wires

Use the wire nuts (GG) to connect the wires. Black wire to Hot/Live. White wire to neutral. Green or bare copper wire to ground.

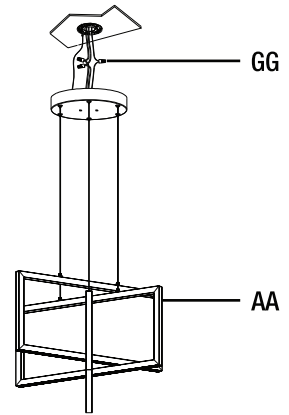


7 Installing the Fixture Canopy

Secure the wires into the junction box. Lift the canopy into the mounting plate screws through the holes. Place the rubber washers (FF) onto the mounting plate screws (CC) and hand tighten the finials (EE) to securely lock the fixture in place.

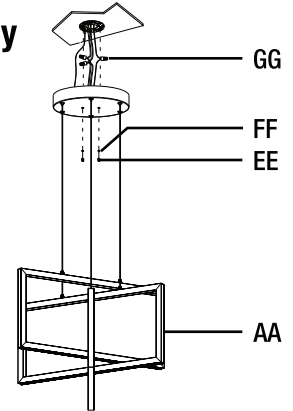

8 Adjusting the Height

- Locate the wire clamp on the canopy where the wires are connected.
- Press and hold the pin of the wire clamps to pull down and increase or push up and shorten the length of the wire.
- Release the pin on the wire clamps to lock the wire in place.
- Repeat instructions to place each wire at the desired height.



NOTE: The wires are preset at a height of 12 inches out of the box. There is an additional preset label at a height of 24 inches.

9 Turning On the Power

Turn on the fusebox or circuit breaker and the power at the wall switch.

Need Help?

Thank you for your purchase. Questions, comments or feedback? We'd love to hear from you. Visit feit.com/help for support or connect with us:



@FeitElectric



@FeitElectricInc



feitelighting