

Features

- Wireless dimmer switch module provides control of dimmable lighting only
- DTV+ system can control up to three dimmer switch modules utilizing the bridge module
- Dimmer switch modules must be located within 25 ft. of the bridge module for reliable operation
- Time delay allows users to select a predetermined delay for the lighting module after the system is turned off

Material

- Premium material construction for durability and reliability




Codes/Standards

UL 244A
CSA C22.2 No. 14
cUL Listed
UL Listed

KOHLER® Electronic Faucets, Valves, and Controls Five-Year Limited Warranty

See website for detailed warranty information.

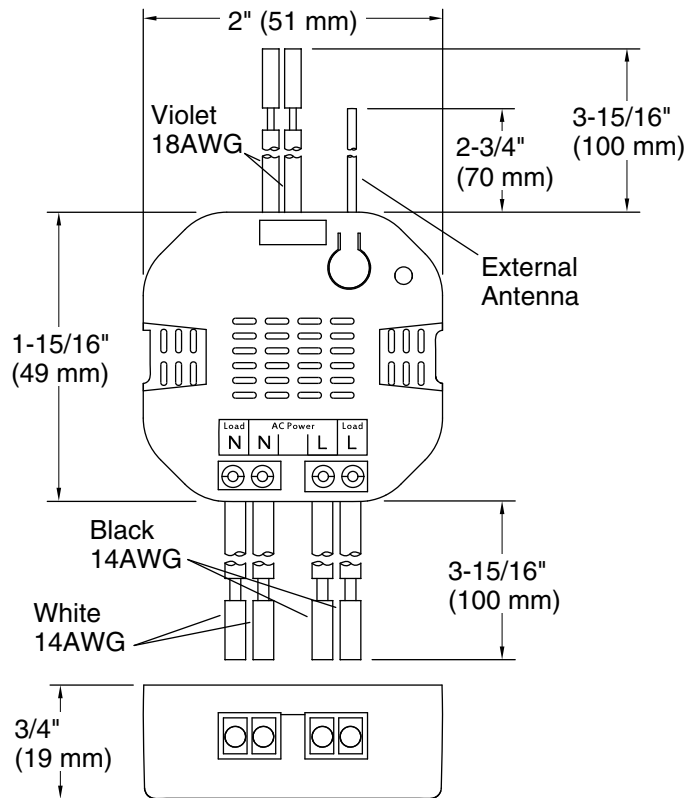

Required Electrical Service

One circuit required.

Lights: 120 V, 15 A, 60 Hz

Technical Information

All product dimensions are nominal.

Power source: Hardwire - AC, not included

Electrical component Lights: 120 V, 2.5 A, 60 Hz, 300 W rating:

Max. Ambient temp: 104°F (40°C)

Max. Relative humidity non-condensing: 95%

Notes

Install this product according to the installation guide.

Recommended that the product be installed by a qualified electrician.

Maximum load is 300 W, 2.5 A, 120 V, 60 Hz

Requires a plastic electrical box 3" (76 mm) x 2" (51 mm) x 2-3/4" (70 mm) or larger, minimum volume of 14 cubic inches.

Dimmer switch will not work if installed in a metal electrical box.

Do not install to a dimmer switch, a three-way switch, or a switch that controls an electrical outlet.

Install using copper wiring only. Connection to a neutral wire is required.

Building materials may block signal. May need to move the bridge to another location if the dimmer modules do not pair.