


COMMERCIAL FLOOD LIGHT

IMPORTANT SAFETY INSTRUCTIONS AND INSTALLATION GUIDE

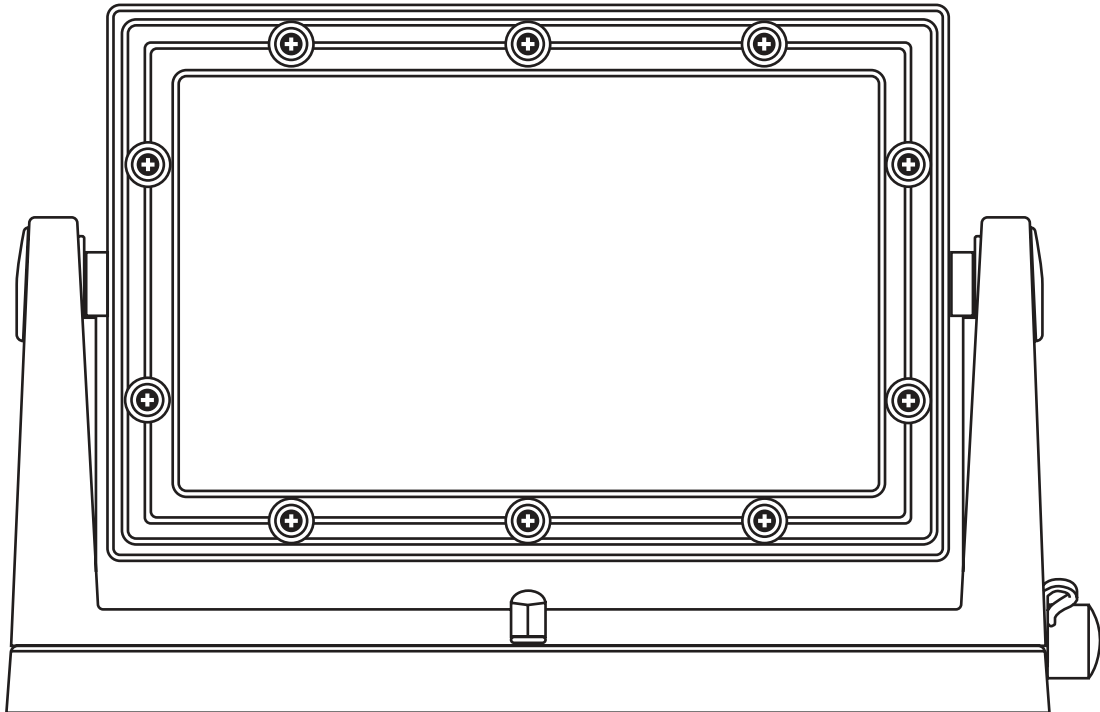

READ BEFORE INSTALLATION
SAVE THESE INSTRUCTIONS



Table of Contents

Table of Contents	2
Safety Information	2
Care and Maintenance	2
Warranty	2
Pre-Installation	3
Tools Required	3
Hardware Included	3
J-Box Installation	4
Operation	5
Troubleshooting	5

Safety Information

For your safety, always remember to:

- ❑ Turn off the power supply at the fuse or circuit breaker box before you install the fixture.
- ❑ Ground the fixture to avoid potential electric shock and to ensure reliable starting.
- ❑ Double-check all connections to be sure they are tight and correct.
- ❑ Wear rubber soled shoes and work on a sturdy wooden ladder.
- ❑ Account for small parts and destroy packing material, as these may be hazardous to children.

This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.

Account for small parts and destroy packing material, as these may be hazardous to children.

NOTICE: All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

Product Specifications

- 120/277VAC, 50/60Hz, 80W max
- Suitable for wet locations
- Not for use with dimmers



WARNING: RISK OF SHOCK. House electric current can cause painful shock or serious injury unless handled properly.



CAUTION: Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.



WARNING: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



WARNING: RISK OF CUTS. Some metal parts in the fixture may have sharp edges. To prevent cuts and scrapes, wear gloves when handling the parts.

Dusk to Dawn Operation:

The light will turn on at dusk and remain on through the night until dawn. The light will remain off throughout the day, until dusk.

FCC STATEMENT

Supplier's Declaration of Conformity:

47 CFR § 2.1077 Compliance Information

Responsible Party: Feit Electric Company

4901 Gregg Road, Pico Rivera, CA 90660, USA

www.feit.com

Unique Identifier: S7FL/REC/RGBW/DD/BZ

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

Care and Maintenance

Periodically clean the fixture and diffuser using a mild, non-abrasive cleaner and soft cloth. When cleaning the fixture, make sure the power is turned off. Do not spray cleaner directly onto any part of the fixture or LEDs.

Limited Warranty

This product is warrantied to be free from defects in workmanship and materials for up to 5 years from date of purchase. If the product fails within the warranty period, please contact Feit Electric at info@feit.com, visit feit.com/contact-us for instructions on replacement or refund. REPLACEMENT OR REFUND IS YOUR SOLE REMEDY. EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTIES ARE LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IS HEREBY EXPRESSLY EXCLUDED. Some states and provinces do not allow the exclusion of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state or province to province.

TOOLS REQUIRED (NOT INCLUDED)



5/16" Phillips
screwdriver




Silicone Sealant

HARDWARE INCLUDED



NOTE: Hardware not shown to actual size.



AA



BB



CC



DD



EE



FF



GG



HH


Part	Description	Quantity
AA	Commercial Flood Light	1
BB	Fixture Mounting Screws	2
CC	Fixture Mounting Nuts	2
DD	Rubber Washers	2
EE	Canopy Mounting Nuts	2
FF	Mounting Plate	1
GG	J-Box Mounting Screws	2
HH	Wire Nuts	3

1 Turning off the Power

- Turn the power OFF at the switch and fusebox or the circuit breaker.


2 Prepare the Fixture Mounting Plate

- Unscrew the canopy mounting nuts (EE) and remove them with the rubber washers (DD) and fixture mounting plate (FF).

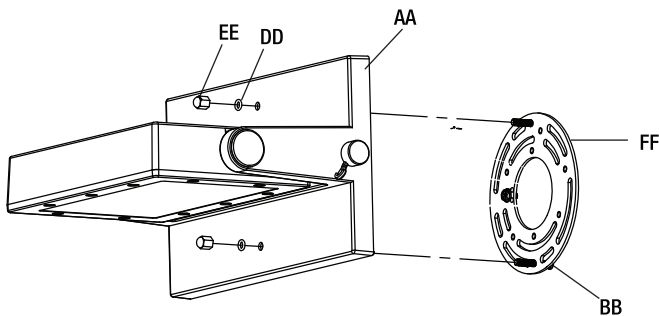


3 Installing the Fixture Mounting Plate

- Secure the fixture mounting screws (BB) onto the mounting plate (FF) using the fixture mounting nuts (CC). Pull the power supply wires to the side and install the mounting plate (FF) onto the j-box with the J-box mounting screws (GG).

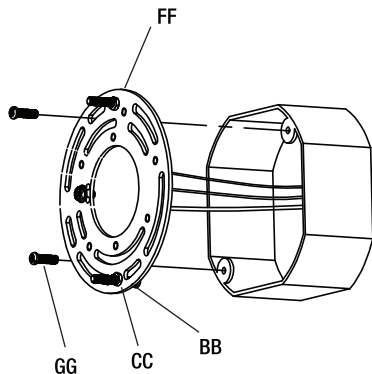


4 Connecting the Power Supply Wires

- Using the provided wire nuts (HH), connect the 3 wires coming from the fixture to the junction box wires:
 - Line to Black
 - Neutral to White
 - Ground to Bare or Green wire

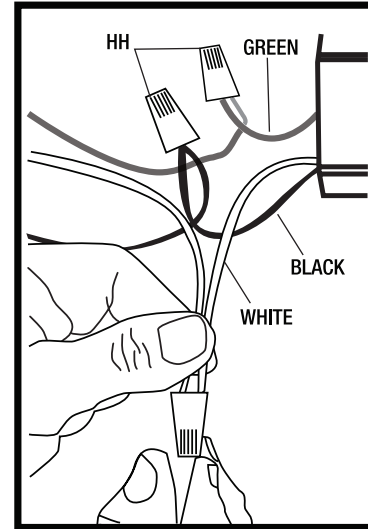

5 Adjust the Fixture and Install

- Adjust the fixture mounting plate (BB) to best fit the fixture then tighten the J-box Mounting Screws (CC). Carefully push all the wires into the box. Align the fixture mounting screws (DD) with the holes on the fixture then reinstall the rubber washers (EE) and canopy mounting nuts (FF).

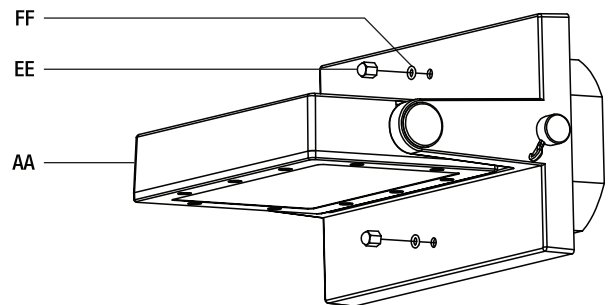

6 Apply a Silicone Sealant

- Once fixture is secured apply a silicone sealant around the fixture and mounting surface to prevent water or moisture from entering into the fixture.

7 Turning the Power On

- Turn the power ON at the wall switch, fusebox or the circuit breaker.

Lumen Switch

- Select the brightness: 4000, 6000, or 8500 lumens

Selecting a Color



- To cycle through the colors, push the Cycle button. Colors are: Soft White (3000K), Neutral White (3500K), Bright White (4000K), Daylight (5000K), Daylight Deluxe (6500K), Red, Blue, Green, Yellow, Orange, Purple, Teal, and Pink. The flood light (AA) will remember the color setting when next turned on.

Dusk-to-Dawn Function

- Remove the photocell sensor cover to activate the Dusk-to-Dawn function. To bypass the Dusk-to-Dawn function and operate by wall switch only, place the cover over the photocell sensor.



NOTE: When installing multiple units side by side, please ensure the photocell sensor are directed in the same light coverage area, otherwise the fixture may turn on or off at a different time.

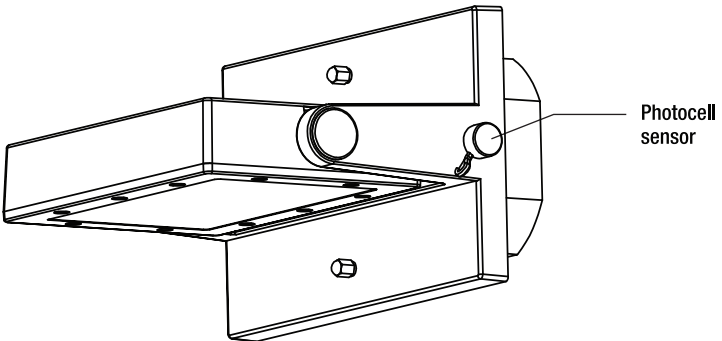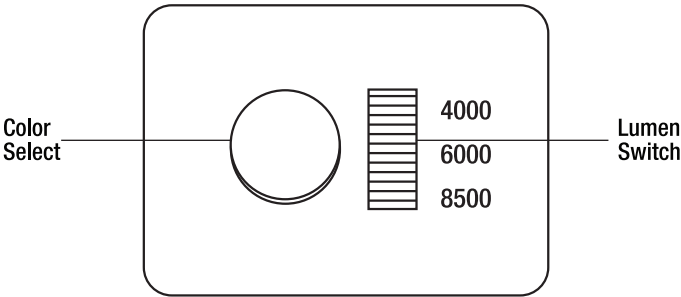

Troubleshooting

Problem	Possible Cause	Solution
The light will not illuminate.	The power is off.	Make sure the power supply is on.
	There is a faulty wire connection.	Check the wiring. Contact a qualified and licensed electrician if you are not comfortable troubleshooting wiring problems.
	There is a faulty wire switch.	Test or replace the switch.
The light does not automatically turn off during daylight hours.	The photocell is covered.	Remove any debris and clean the photosensor.
Fixture cycles ON and OFF continuously.	Dusk-to-Dawn sensor is sensing reflected light from the fixture or other surrounding light source.	1. Ensure no reflective materials are near to the fixture. 2. Relocate the fixture to a different location where it no longer causes reflected light.



Need Help?

Thank you for your purchase.

Questions, comments or feedback?

We'd love to hear from you.

Visit **feit.com/help** for support or connect with us:



@FeitElectric



@FeitElectricInc



feitelectriclighting