


HomeWorks QS RF seeTouch Tabletop Keypads

HomeWorks QS RF seeTouch Tabletop Keypads provide homeowners with a simple and elegant way to operate lights, shades/draperies, motorized screens, thermostats, and many other devices.

HomeWorks QS RF seeTouch Tabletop Keypads feature large, easy-to-use buttons, plus a unique backlit engraving option that makes the keypads readable any time of the day or night. The keypad buttons are rounded, making them easier to read.


The versatile design of HomeWorks QS RF seeTouch Tabletop Keypads allows them to be mounted on a wall, placed on top of a table, or used as a cordless keypad. The keypads can be powered by a DC adapter or with 2 AAA batteries. Battery powered Tabletop Keypads will shut off after a short period of inactivity in order to conserve battery power.




HQY*-T5RL



HQY*-T5CRL



HQY*-T10RL



HQY*-T10CRL



HQY*-T15RL



HQY*-T15CRL

*"Y" in the model number represents frequency code

Frequency/Channel Codes*

Code	Frequency Range	Geographic Region
K	868.0 — 869.8 MHz	Europe, U.A.E.
Q	433.0 — 434.7 MHz	Hong Kong, Macau
R	431.0 — 437.0 MHz	USA, Canada, Mexico, Brazil

* Contact Lutron for frequency band compatibility for your geographic region. All wireless devices need to be the same frequency band for proper operation.

Model Numbers

HQR-T5RL-XX*, HQR-T5RL-XX*-BA, HQK-T5RL-XX, HQQ-T5RL-XX*	5 button with Master On/Off and Raise/Lower.	HQR-T5CRL-XX*, HQR-T5CRL-XX*-BA, HQK-T5CRL-XX*, HQQ-T5CRL-XX*	5 button with Column Raise/Lower.
LFK-T5RL-XX*-E	Engraved Faceplate	LFK-T5CRL-XX*-E	Engraved Faceplate
RK-T5RL-XX*-E	Engraved Button Kit	RK-T5CRL-XX*-E	Engraved Button Kit
HQR-T10RL-XX*, HQR-T10RL-XX*-BA, HQK-T10RL-XX*, HQQ-T10RL-XX*	10 button with Master On/Off and Raise/Lower.	HQR-T10CRL-XX*, HQR-T10CRL-XX*-BA, HQK-T10CRL-XX*, HQQ-T10CRL-XX*	10 button with Column Raise/Lower.
LFK-T10RL-XX*-E	Engraved Faceplate	LFK-T10CRL-XX*-	Engraved Faceplate
RK-T10RL-XX*-E	Engraved Button Kit	RK-T10CRL-XX*-E	Engraved Button Kit
HQR-T15RL-XX*, HQR-T15RL-XX*-BA, HQK-T15RL-XX*, HQQ-T15RL-XX*	15 button with Master On/Off and Raise/Lower.	HQR-T15CRL-XX*, HQR-T15CRL-XX*-BA, HQK-T15CRL-XX*, HQQ-T15CRL-XX*	15 button with Column Raise/Lower.
LFK-T15RL-XX*-E	Engraved Faceplate	LFK-T15CRL-XX*-	Engraved Faceplate
RK-T15RL-XX*-E	Engraved Button Kit	RK-T15CRL-XX*-E	Engraved Button Kit

* "XX" in the model number represents color/finish code. See **Colors and Finishes** at end of document.

HomeWorks QS RF seeTouch Tabletop Keypads

Design Features


- At the press of a single button, lights fade ON or OFF to desired levels and shades/draperies open or close to desired positions.
- Light levels and shade/drapery positions can be fine-tuned by pressing and holding the raise/lower buttons.
- Programmable to select whole-house or single-room preset levels or positions.
- Green LEDs for status and button/engraving backlighting.
- Adjustable backlight intensity.
- Prepaid engraving included. Redeemable for one engraved button kit.
- Tabletop Keypad Button action is “Wake-up and Activate” – A single button press will “wake up” and activate selected button.

HomeWorks QS RF seeTouch Tabletop Keypads


Dimensions

All dimensions are shown as in (mm)


Keypad Front View

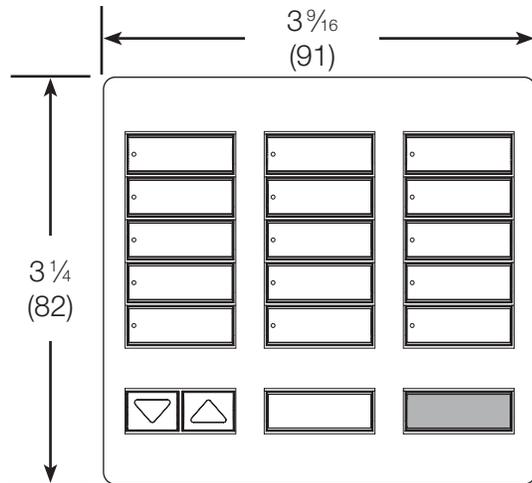


Keypad Side View



Mounting Bracket Front View

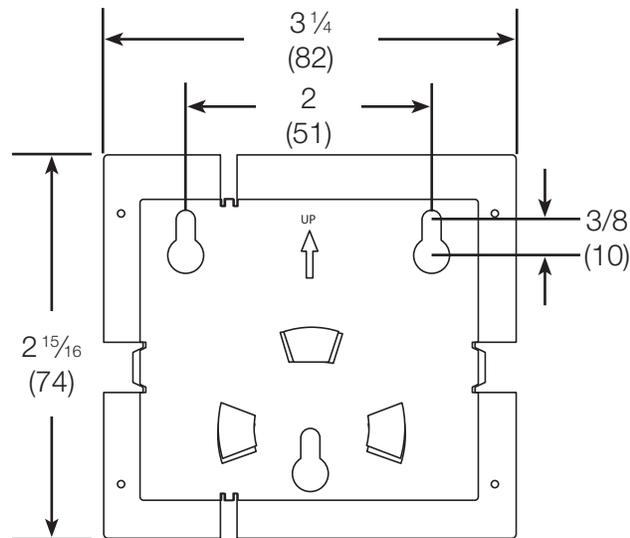


Mounting Bracket Side View

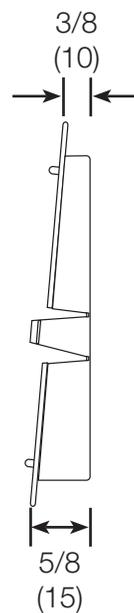


HomeWorks QS RF seeTouch Tabletop Keypads

Wall Mounting (optional)


Attach mounting bracket to wall using the supplied wall anchors and screws.

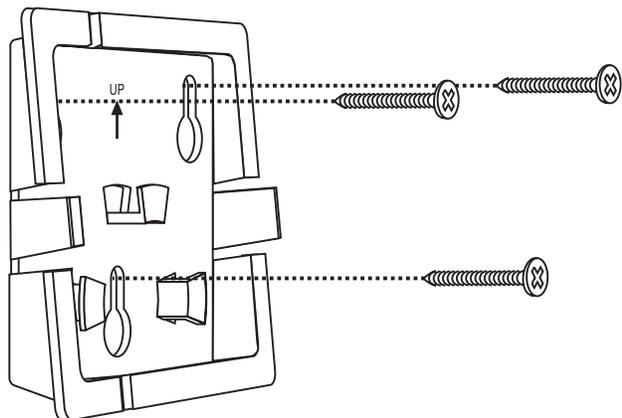

If using the DC adapter, wrap excess cord around the cord holder and snap the keypad onto the mounting bracket.

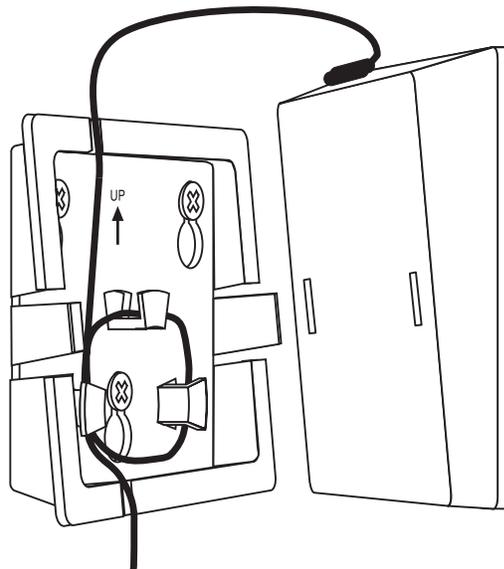

Operation

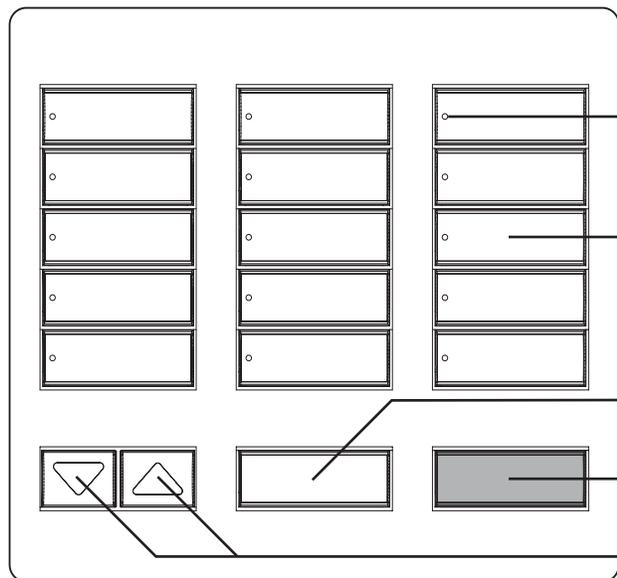

- Status LEDs**
Show which keypad button has been activated.
- Keypad Buttons**
Press to activate desired levels or positions.
- All On Button**
Turn all lights to full on and shades/draperies to open.
- All Off Button**
Turn all lights off and shades/draperies to closed.
- Raise/Lower Buttons**
Lights increase or decrease in intensity and shades/draperies move towards the open or close limit.

Colors and Finishes

Keypads and Engraved Button Kits

Satin Finishes



Snow
SW



Midnight
MN

Engraved Faceplate Kits

Satin Finishes



Snow
SW



Midnight
MN

- Due to printing limitations, colors and finishes shown cannot be guaranteed to perfectly match actual product colors.
- Color chip keychains are available for more precise color matching:

Satin Finishes – SC-CK-1

Architectural Metal Finishes – AMTL-CK-1

Engraved Faceplate Kits

Metal Finishes


When ordering metal faceplates, it is recommended to order the keypad in Midnight (MN).



Satin Brass
SB



Bright Brass
BB



Bright Chrome
BC



Clear Anodized
Aluminum
CLA



Black Anodized
Aluminum
BLA



Brass Anodized
Aluminum
BRA



Antique Brass
QB



Antique Bronze
QZ



Satin Chrome
SC



Satin Nickel
SN



Bright Nickel
BN

Lutron, Lutron, HomeWorks, and seeTouch are trademarks of Lutron Electronics Co., Inc., registered in the U.S. and other countries.