



# versatile™ 4C Mailbox, 9 High Suite



Floor

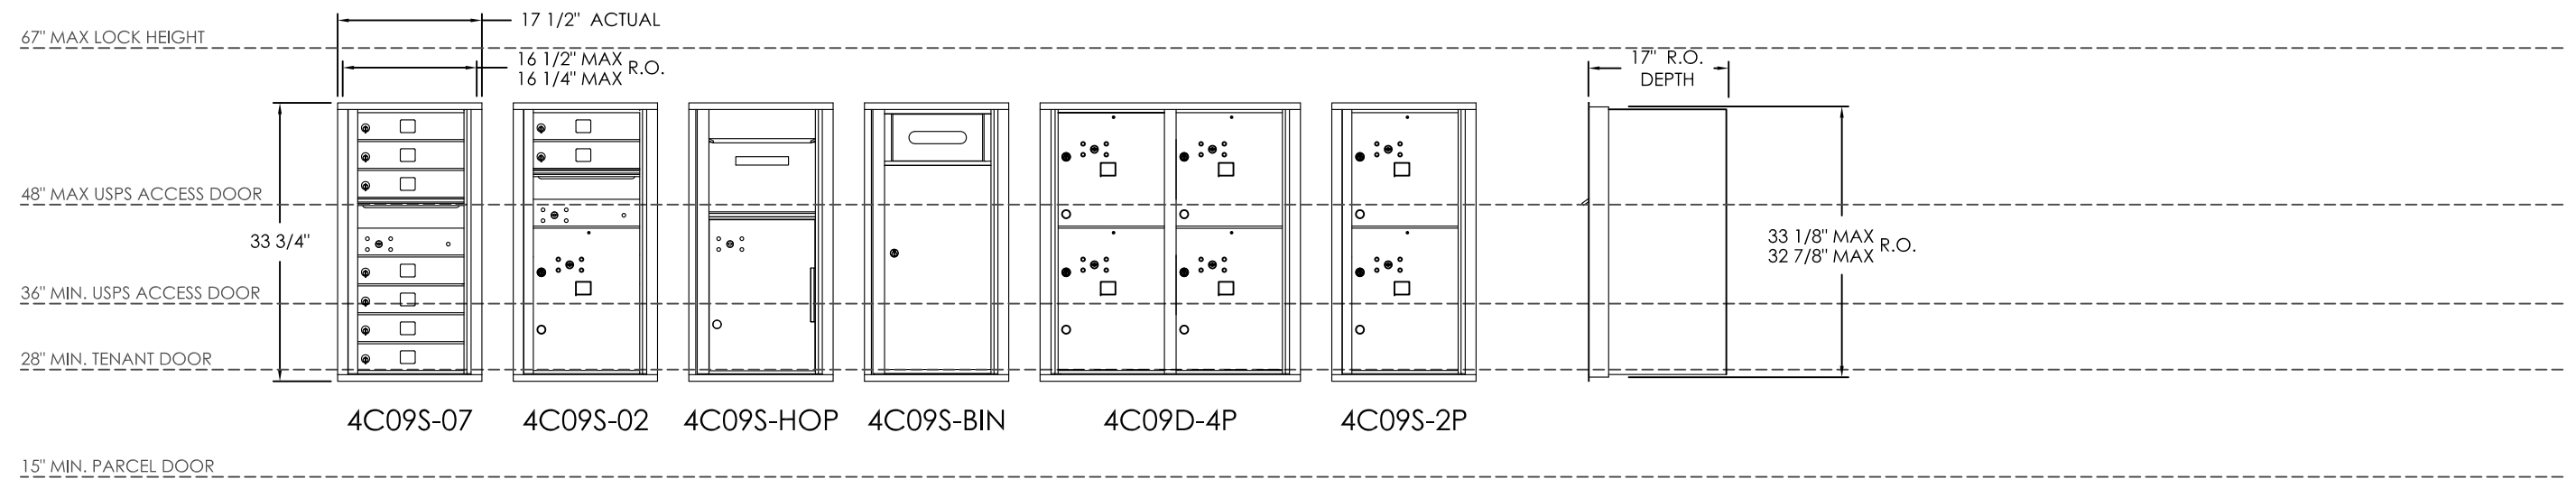

Floor

**Notes:**

1. Below are the USPS STD-4C installation guidelines:
  - a. At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
  - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
  - c. No patron (tenant) lock shall be positioned more than 67" AFF.
  - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
  - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
2. Modules noted with \* do not meet USPS STD-4C guidelines above..
3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator:  
[www.florencemailboxes.com/configurator](http://www.florencemailboxes.com/configurator).

PRODUCT SERIES: versatile™ 4C Mailbox 9 High Suite

**FLORENCE**  
**CORPORATION**  
 5935 Corporate Drive • Manhattan, KS 66503  
 800.275.1747 • [www.florencemailboxes.com](http://www.florencemailboxes.com)

MODEL	4C9H	REV	B
SCALE	NONE	LAST REV DATE	08/08/2019
DRAWING NUMBER	4C9HCS	DRAWN BY	RAK
		SHEET	1 OF 1