


11 INCH ROUND FLUSH MOUNT

IMPORTANT SAFETY INSTRUCTIONS AND INSTALLATION GUIDE



READ BEFORE INSTALLATION
SAVE THESE INSTRUCTIONS

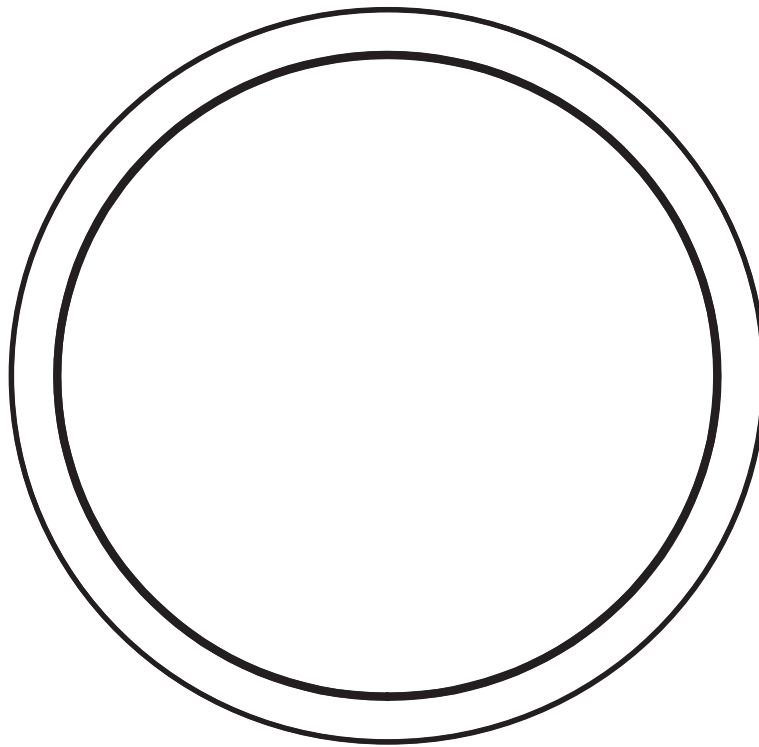

We appreciate the trust and confidence you have placed in Feit Electric through the purchase of this product. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Feit Electric.

Table of Contents

Safety Information	2
FCC Statement	2
Warranty	2
Pre-Installation	3
Tool Required	3
Hardware Included	3
Operating Fixture	3
Color Settings	3
Installation	4

Safety Information

For your safety, always remember to:

- ☐ Turn off the power supply at the fuse or circuit breaker box before you install the fixture.
- ☐ Ground the fixture to avoid potential electric shock and to ensure reliable starting.
- ☐ Double-check all connections to be sure they are tight and correct.
- ☐ Wear rubber soled shoes and work on a sturdy wooden ladder.
- ☐ Account for small parts and destroy packing material, as these may be hazardous to children.

This fixture is designed for use in a circuit protected by a fuse or circuit breaker. It is also designed to be installed in accordance with local electrical codes. If you are unsure about your wiring, consult a qualified electrician or local electrical inspector, and check your local electrical code.

Product Specifications

- 120VAC, 60Hz
- Wall Dimmable
- Suitable for Damp Locations



CAUTION: Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.



CAUTION: Consult a certified electrician to ensure correct branch circuit conductor.



WARNING: RISK OF SHOCK. House electric current can cause painful shock or serious injury unless handled properly.



CAUTION: RISK OF FIRE. Before installing your lighting fixture, thoroughly review this installation manual. If you do not have sufficient electrical wiring experience have your fixture installed by a certified electrician. All electrical connections must be in accordance with Local and National Electrical Code (NEC) Standards. Reliable operating temperature is -13°F to 113°F / -25°C to 45°C. Suitable for Damp Locations. For more information including dimmer compatibility visit www.feit.com.

NOTICE: All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a certified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

FCC STATEMENT

Supplier's Declaration of Conformity:

47 CFR § 2.1077 Compliance Information

Responsible Party: Feit Electric Company

4901 Gregg Road, Pico Rivera, CA 90660, USA

www.feit.com

Unique Identifier: FP11RT/SCCT/NL/WH

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. Any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

Limited Warranty

This product is warrantied to be free from defects in workmanship and materials for up to 3 years from date of purchase. If the product fails within the warranty period, please contact Feit Electric at info@feit.com, visit feit.com/contact-us for instructions on replacement or refund. REPLACEMENT OR REFUND IS YOUR SOLE REMEDY. EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ANY IMPLIED WARRANTIES ARE LIMITED IN DURATION TO THE DURATION OF THIS WARRANTY. LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IS HEREBY EXPRESSLY EXCLUDED. Some states and provinces do not allow the exclusion of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state or province to province.

Pre-Installation

TOOLS REQUIRED (NOT INCLUDED)




Phillips Screwdriver



NOTE: Hardware not shown to actual size.

HARDWARE INCLUDED



AA




BB



CC



DD




EE

Part	Description	Quantity
AA	Fixture	1
BB	Mounting Bracket	1
CC	Junction Box Mounting Screws #8-32 x 1 in.	2
DD	Wire Nuts	3
EE	Black Trim	1

Operating Fixture

Selecting Modes


- ☐ Flip the wall switch ON to enter the Mode 1: Main Light.
- ☐ Flip the wall switch OFF and back ON again in less than 2 seconds to enter Mode 2: Night Light.



Main Light

Night Light

Color Settings

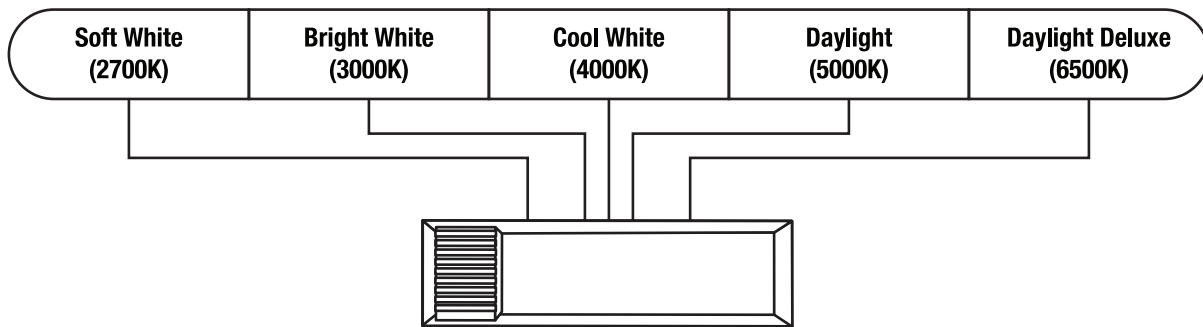

1. When the slide switch is set to 2700K, the color temperature is set to Soft White.
2. When the slide switch is set to 3000K, the color temperature is set to Bright White.
3. When the slide switch is set to 4000K, the color temperature is set to Cool White.
4. When the slide switch is set to 5000K, the color temperature is set to Daylight.
5. When the slide switch is set to 6500K, the color temperature is set to Daylight Deluxe.

Need Help?



Thank you for your purchase.
Questions, comments or feedback?
We'd love to hear from you.

Visit feit.com/help for support or connect with us:



@FeitElectric



@FeitElectricInc



feitelectricleighting


Installation

1 Turning Off the Power

- Turn the power OFF at the switch and fusebox or the circuit breaker.

2 Identifying the Wires


Black - Hot/Live
White - Neutral
Green or Bare Copper - Ground

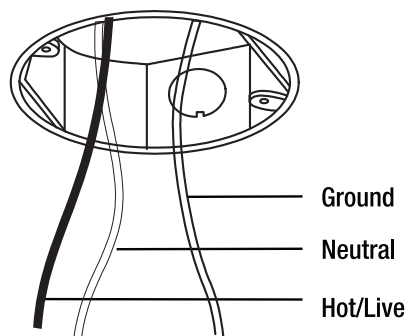

3 Installing the Mounting Bracket to the Junction Box


- Feed the junction box wires through the center of the mounting bracket (BB).
- Attach the mounting bracket (BB) to the junction box using the two junction box mounting screws (CC).

NOTE: Be sure this label faces downward, away from the Jbox

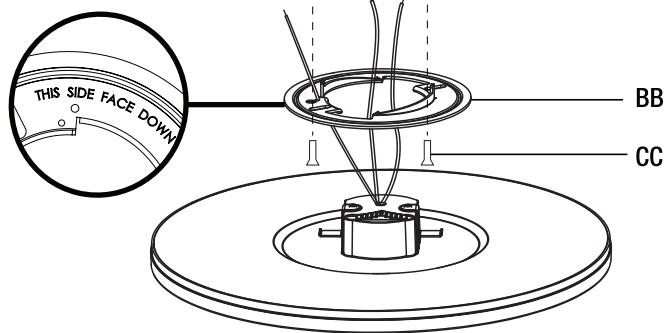

4 Connecting the Wires


- Use the wire nuts (DD) to connect the ground wire (green) coming out of the fixture (AA) to the houseground wire (usually green).
- Use the wire nuts (DD) to connect the black line wire coming out of the fixture (AA) to the line wire (usually black) coming from the junction box.
- Use the wire nuts (DD) to connect the white neutral wire coming out of the fixture (AA) to the neutral wire (usually white) coming from the junction box.

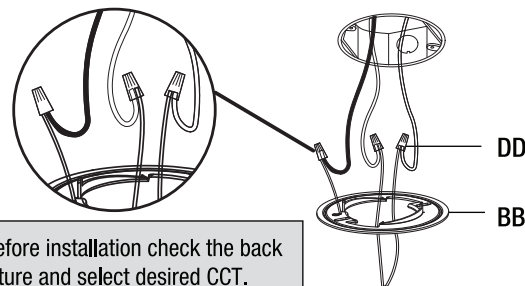

NOTE: Before installation check the back of the fixture and select desired CCT. See page 3 for additional information.

5 Aligning the Fixture


- Line up the hook clips of the fixture (AA) with the open slots of the mounting bracket (BB). Insert the hook clips of the fixture (AA) into the open slots of the mounting bracket (BB).

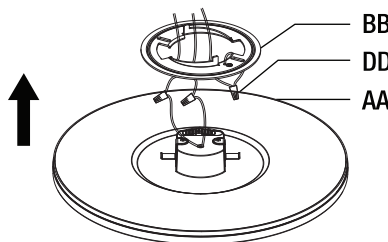

NOTE: Tuck the wires into the junction box neatly to create enough space for the wire enclosure to fit in without obstruction.

6 Securing the Fixture

- Turn clockwise to secure the fixture (AA) on to the mounting bracket (BB).

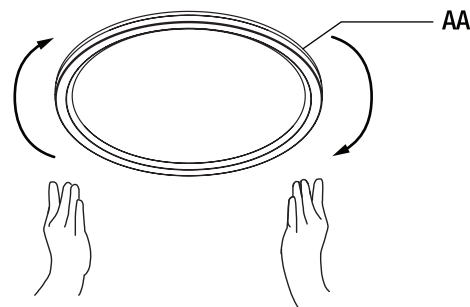

NOTE: If you would like your fixture to display the white trim, remove the black trim by carefully pulling it off from opposite ends simultaneously. The trim is magnetically attached, making it easy to detach and reattach as needed. Retain and carefully store the removed trim for future use.

7 Turning On the Power

Turn on the fusebox or circuit breaker and the power at the wall switch.