
## NEVIS PLATFORM TWIN/FULL/QUEEN/KING BED MODUS **ASSEMBLY INSTRUCTIONS**




#### **BOX #1**

A. HEADBOARD 1 PC B. FOOTBOARD 1 PC




#### **BOX #2**

C. SIDE RAIL 2 PCS D. CENTER SLAT 1 PC E. SUPPORT LEG 4 PCS BED HARDWARE BOX\*



#### **BOX #3**

F. SLAT ROLL 1 SET



#### **NEVIS PLATFORM BED ASSEMBLED**



#### **BED HARDWARE PACKED IN BOX #2**

1	PHILLIPS HEAD BOLT(8x20mm)	8 PCS	2	SPRING WASHER (M8)	8 PCS	3	FLAT WASHER (M8)	8 PCS
	E DOUDO							
4	ALLEN BOLT (6x40mm)	11 PCS	5	WOOD SCREW (8x30mm)	9 PCS	6	ALLEN KEY	1 PC
			80 million					

TOOL REQUIRED: PHILLIPS HEAD SCREWDRIVER (NOT PROVIDED)


> YOUR BOX **MAY CONTAIN EXTRA HARDWARE**








#### **STEP 1:**

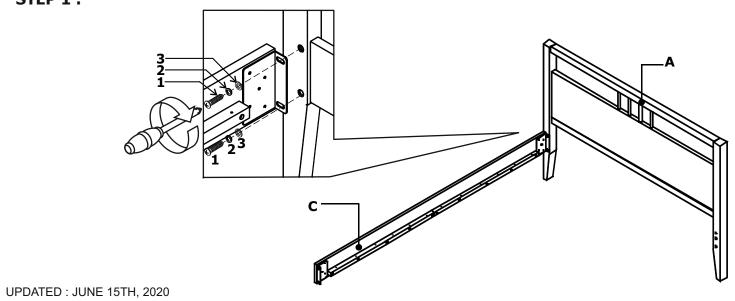


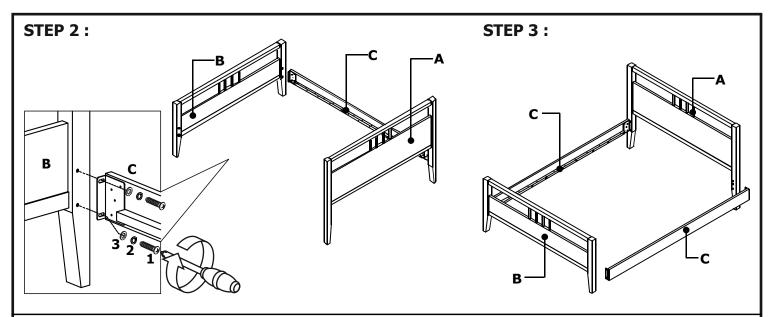




#### **STOP**

- IF USING BED FRAME WITH ADJUSTABLE MATTRESS BASE, SKIP TO APPENDIX A: ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT.
- IF USING BED FRAME WITH STANDARD BOX SPRING OR FOUNDATION CONTINUE TO STEP 4.

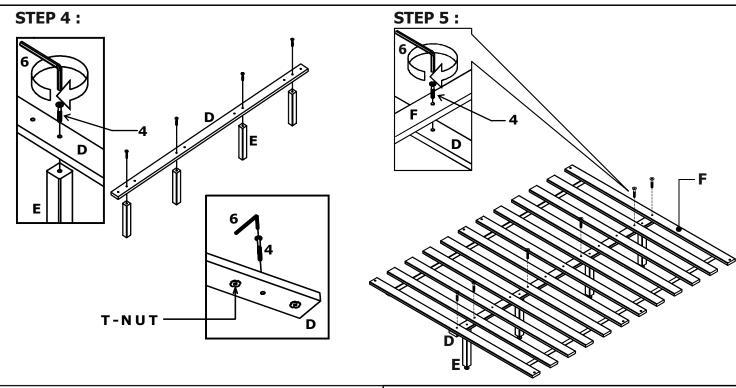


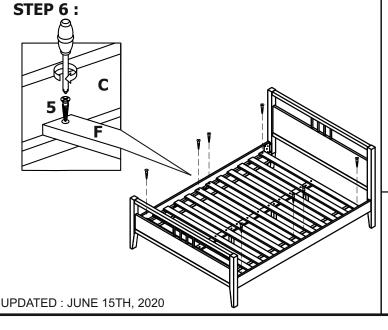

# INSTRUCTIONS FOR ADJUSTING LEVELERS:

POSITION THE BED IN YOUR ROOM. LOCATE LEVELERS UNDER EACH SUPPORT LEG **(E)**.

TURN LEVELERS COUNTER-CLOCKWISE TO EXTEND, CLOCKWISE TO RETRACT. ADJUST LEVELERS UNTIL EACH SUPPORT LEG IS APPLYING EQUAL UPWARD PRESSURE ON THE BED SUPPORT SLAT.



### **MAINTENANCE INSTRUCTIONS:**

- REMOVE BOX SPRING AND MATTRESS BEFORE MOVING YOUR BED.
- LIFT YOUR BED WHEN MOVING IT.
  DRAGGING CAN DAMAGE THE SUPPORT LEG.
- READJUST LEVELERS AFTER MOVING YOUR BED.

## NEVIS PLATFORM TWIN/FULL/QUEEN/KING BED MODUS APPENDIX A:ADJUSTABLE MATTRESS BASE ASSEMBLY SUPPLEMENT



AN ADJUSTABLE MATTRESS BASE IS A FREESTANDING MATTRESS SUPPORT THAT SITS WITHIN THE PERIMETER OF THE BED FRAME.

IF USING THIS BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION THESE INSTRUCTIONS DO NOT APPLY.


PRE-ASSEMBLED SIDE RAIL CLEATS OBSTRUCT ADJUSTABLE BASE INSTALLATION AND OPERATION. FOLLOW THESE INSTRUCTIONS TO REMOVE THEM.

#### THE FOLLOWING PARTS ARE NOT REQUIRED FOR ADJUSTABLE MATTRESS BASE INSTALLATION:

1 PC 4. ALLEN BOLT (6x40mm) D. CENTER SLAT 11 PCS 4 PCS 5. WOOD SCREW (8x30mm) E. SUPPORT LEG 9 PCS F. SLAT ROLL 1 SET

#### STEP 1:

USE ALLEN KEY (6) TO UNSCREW ALLEN BOLTS AND REMOVE PRE-ASSEMBLED SIDE RAIL CLEATS.

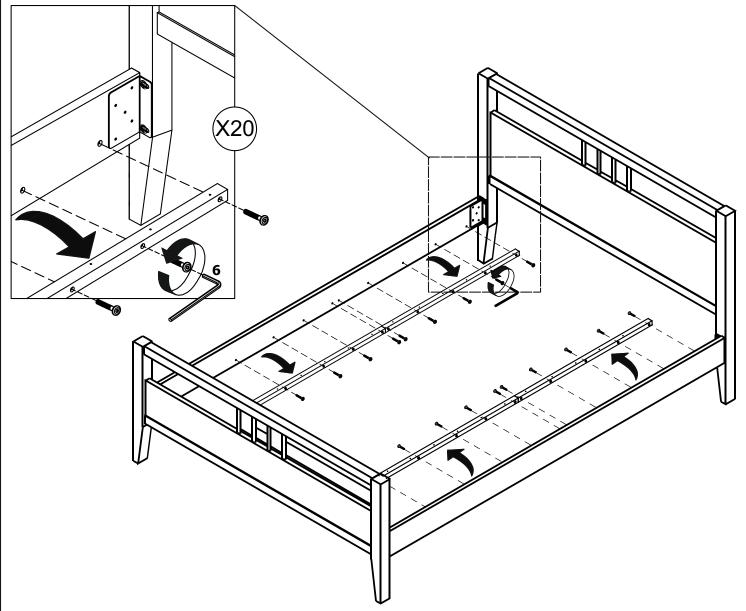

NOTE: YOU MAY WISH TO RETAIN UNUSED PARTS IF IN THE FUTURE YOU INTEND TO USE THE BED FRAME WITH A STANDARD BOX SPRING OR FOUNDATION.

UPDATED: JUNE 15TH, 2020