versatile™ 4C Surface Mount Collar, SM11D 17¹/₁₆" ACTUAL 323/8" ACTUAL -**DEPTH** 4115/16" ACTUAL 26½" FROM FINISHED FLOOR TO BOTTOM OF COLLAR FINISHED FLOOR

Notes

- Designed to mount Florence Versatile[™] 4C mailbox double column 11-High Suite modules (sold separately).
- 2. For use with front loading modules only.


PRODUCT SERIES: VERSATILETM 4C SURFACE MOUNT COLLAR



5935 Corporate Drive • Manhattan, KS 66503 www.florencemailboxes.com • (800) 275-1747 A GIBRALTAR INDUSTRIES COMPANY

	MODEL SM11D	REV	В
	SCALE NONE	LAS	7/02/2014
	DRAWING NUMBER	•	DRAWN BY
,	SM11DCS		TNS

versatileTM 4C Mailbox, 4C11D-09

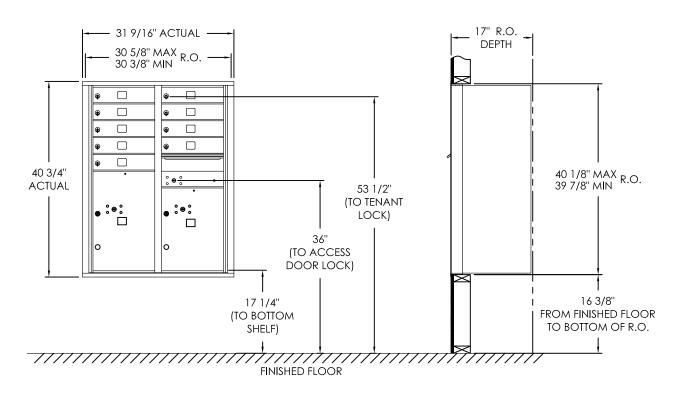

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB1	3" H x 12" W x 15" D	9
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1
PARCEL	PL5	17" H x 12" W x 15" D	1
PARCEL	PL6	20-1/2" H x 12" W x 15" D	1

Notes

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX



5935 Corporate Drive • Manhattan, KS 66503 800.275.1747 • www.florencemailboxes.com

MODEL 40	C11D-09	REV	F
SCALE	NONE	LAS	T REV DATE 1/26/21
DRAWING	NUMBER		DRAWN BY
4C1	1D-09CS		NBC