



versatile™ 4C Mailbox, 14 High Suite

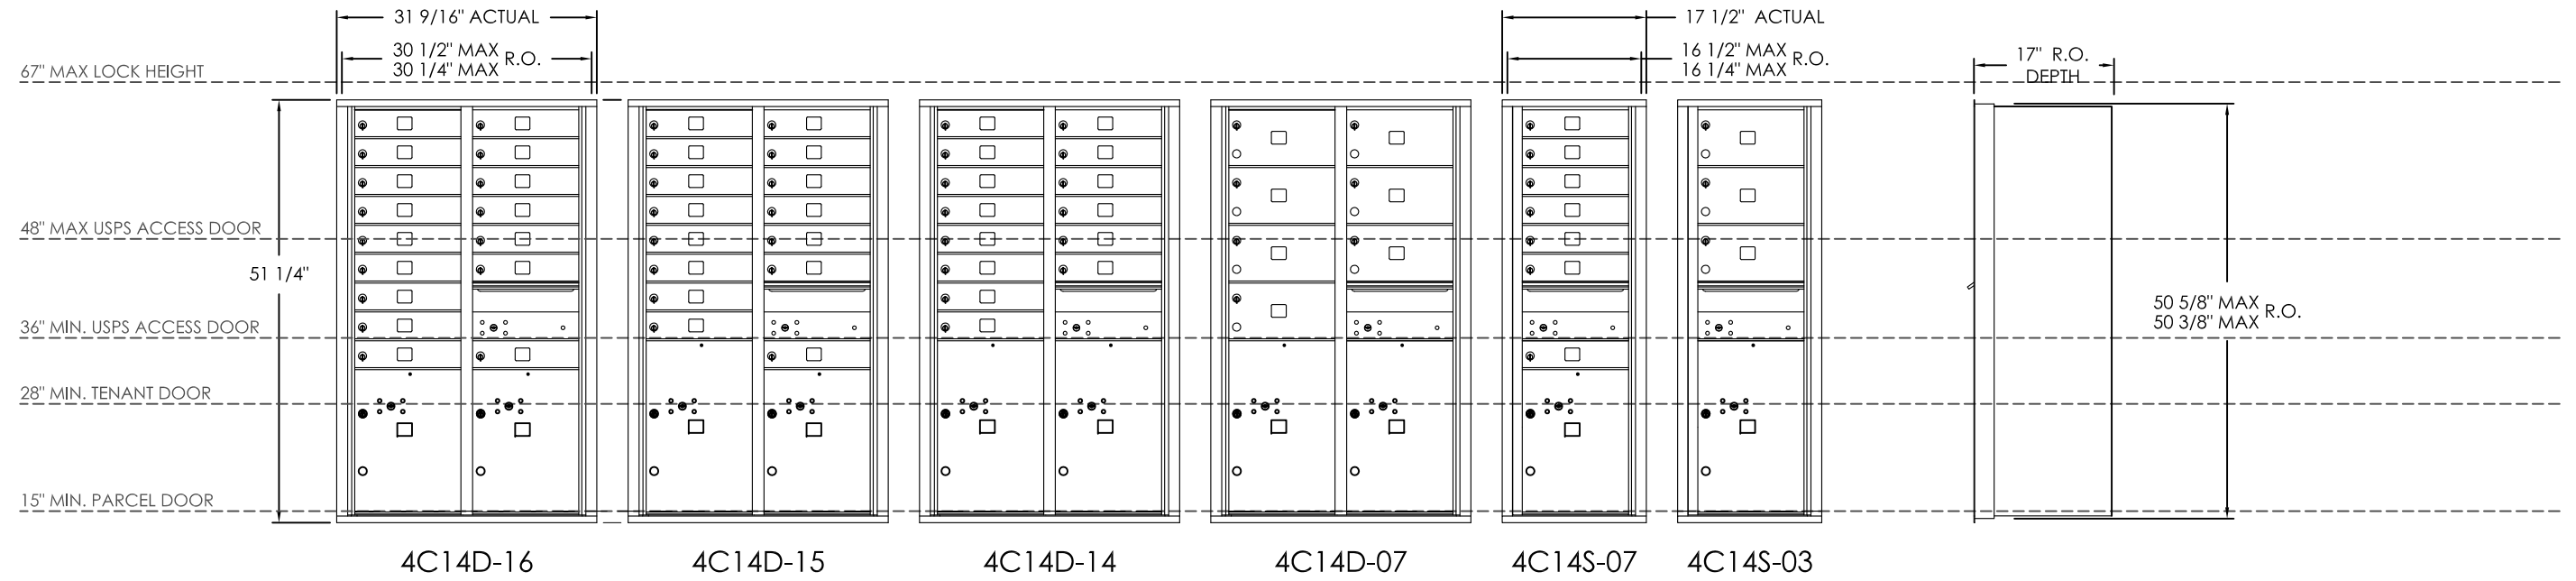

- Notes:**
1. Below are the USPS STD-4C installation guidelines:
 - a. At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
 2. Modules noted with * do not meet USPS STD-4C guidelines above..
 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: versatile™ 4C Mailbox 14 High Suite					
<p style="font-size: small;">5935 Corporate Drive • Manhattan, KS 66503 800.275.1747 • www.florencemailboxes.com</p>	MODEL	4C14H	REV	B	
	SCALE	NONE	LAST REV DATE	08/08/2019	
	DRAWING NUMBER	4C14HCS	DRAWN BY	RAK	SHEET