

Notes:

- Designed to mount Florence Versatile[™] 4C mailbox single column 15-High Suite modules (sold separately).
- 2. For use with front loading modules only.

PRODUCT SERIES: VERSATILETM 4C SURFACE MOUNT COLLAR




5935 Corporate Drive • Manhattan, KS 66503 www.florencemailboxes.com • (800) 275-1747 A GIBRALTAR INDUSTRIES COMPANY

•	MODEL SI	M15S	REV	В
<i>}</i> 7	SCALE	NONE	LAS	T REV DATE 7/02/2014
,	DRAWING	NUMBER		DRAWN BY

TNS

SM15SCS

versatileTM 4C Mailbox, 4C15S-04

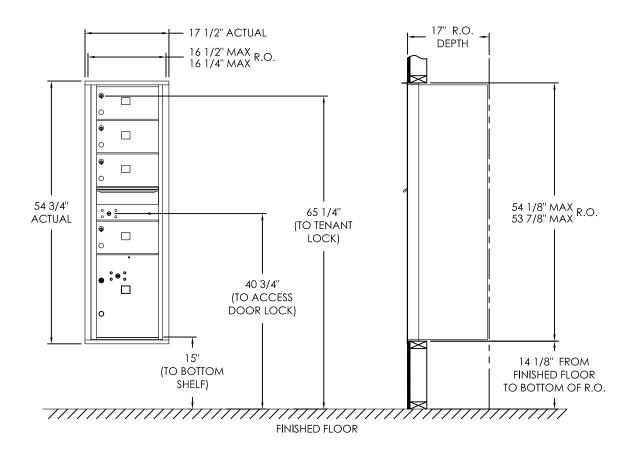

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB2	6-1/2" H x 12" W x 15" D	4
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1
PARCEL	PL5	17" H x 12" W x 15" D	1

Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
 - a. At least one customer compartment shall be positioned less then 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
- 2. This 4C mailbox can also be used for private applications.
- 3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX



5935 Corporate Drive • Manhattan, KS 66503 800.275.1747 • www.florencemailboxes.com

MODEL 40	C15S-04	REV	Е
SCALE	NONE	LAS	t rev date 07/08/19
DRAWING	NUMBER		DRAWN BY
4C	15S-04CS		RAK