


# Daintree® Wireless Controls

## WWD2-2 Wireless Wall Dimmer

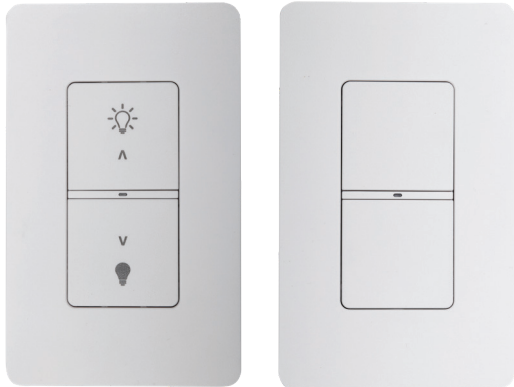

## Description

The **Wireless Wall Dimmer (WWD2-2)** is part of the Daintree Wireless Controls product portfolio, a wireless controls solution for lighting and building control, monitoring, and optimization. Daintree Wireless controls provide a highly scalable solution to address evolving environmental regulations and transform spaces into intelligent environments for buildings of all sizes.

## Product Overview

The **WWD2-2** is a battery-powered wall dimmer switch that takes the place of a standard wall switch. Using wireless communications, this switch can be used to turn lights on, off, or dim to the users light preference levels.

Installation is quick and easy without the need for any wires, plenum access or wall cavity, while its sleek, low-profile design will complement any office or commercial environment.

- Suitable for many applications, including commercial office, education, healthcare and retail.
- Simple wall mount
- Slim form factor
- Completely wireless installation, communicates to Daintree EZ Connect or Daintree Networked nodes.

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

## Key Features and Benefits

- Works on Daintree EZ Connect or Daintree Networked Wireless Controls systems
- Intuitive personal controls provide dimming or scene control
- Provides 3-way capability and can connect up to 4 switches per zone
- Decorator style
- Completely wireless installation. Communicates to Daintree Wireless Controls, nodes and devices
- In-Wall or Surface Mount Options
- 5-year battery operation

## 2-Button Wall Dimmer (WWD2-2SM & WWD2-2IW)

### Operation

- Can be programmed as a master On/Off & Dimmer switch
- Multi-way operation (up to 4 switches per zone)

### Mounting

- Surface mount (WWD2-2SM)
  - Flexible mounting options (i.e. Entrance, workstation, podium, conference table)
- Recess Mount (WWD2-2IW)
  - Mount in wall Junction Box
  - Ability to Gang Devices


### Commissioning

- Daintree EZ Connect App for Zonal Room Based Control (app available on Apple App Store)
- Daintree Controls Software (DCS) in Daintree Networked







# Daintree® Networked | WWD2-2 Wireless Wall Dimmer

## WWD2-2SM

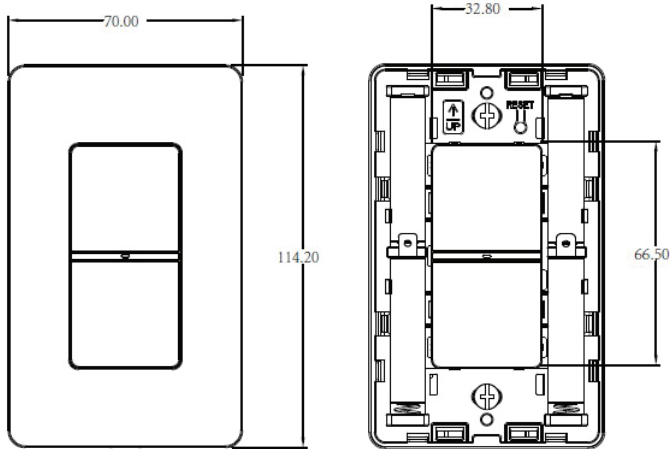

## WWD2-2IW

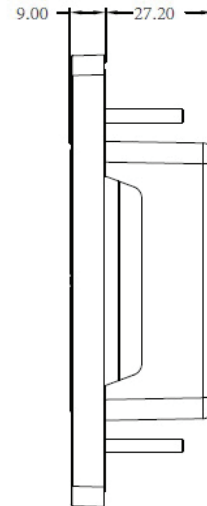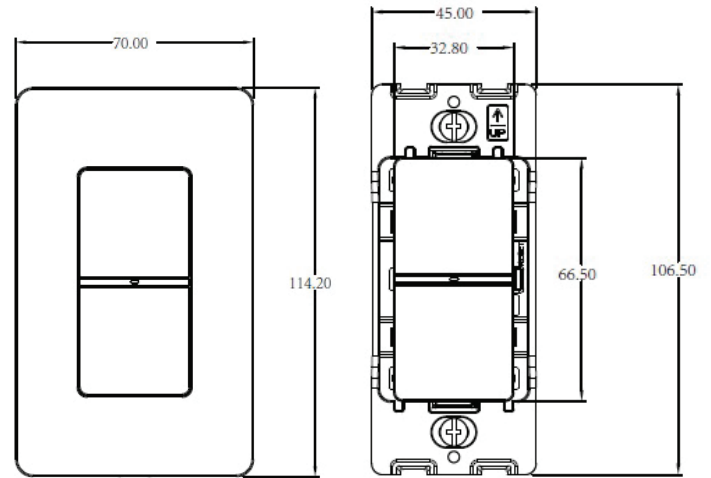

Specifications	WWD2-2SM	WWD2-2IW
Dimensions	114mm H x 70mm W x 15mm D	114mm H x 70mm W x 36mm D
Weight	130g	130g
Power Supply	(4) AAA 1.5V battery	(4) AAA 1.5V battery
Battery Life	5yr (normal operation)	5yr (normal operation)
Operating Environment	-10°C to 40° (Indoor Use Only)	-10°C to 40° (Indoor Use Only)
Status Indicator	Networked joined/Button triggered	Networked joined/Button triggered
Mounting	Surface mounted, screw hole in backplate, cover can be removed, handheld	Mounts into junction box
Warranty	5 Years	5 Years

# Daintree® Networked | WWD2-2 Wireless Wall Dimmer

## Warranty

GE Current, a Daintree Company offers a limited Warranty across its Daintree Portfolio. The table below summarizes the Warranty terms. For additional information, please review the Limited Warranty Document on the Daintree Homepage.


Component	Warranty Period	Coverage Details
<b>Daintree Software</b>	1 year (IoT Cloud installed Software) Subscription term (SaaS) 3 years	Current warrants that as long as all applicable fees due are paid, Daintree Software will substantially conform to the applicable published documentation and published specifications for the Warranty Period.
<b>System Controller</b>	3 years	100% parts coverage. Warranty for non-Daintree software (such as operating system software) is provided by the respective software; Current makes no warranty with respect to non-Daintree software.
<b>WACs</b>	5 years	100% parts coverage
<b>Wireless Adapters</b>	5 years	100% parts coverage
<b>Wireless Devices</b>	5 years	100% parts coverage, excluding batteries.
<b>Wireless Thermostats</b>	2 years	100% parts coverage

Daintree wireless controls are available integrated and preinstalled in many Current lighting fixtures. Any 0-10V lighting fixture can be enabled with Daintree controls with a Daintree LCA kit.

For a complete list of integrated sensors, look for the Daintree Wireless Controls icon on the product pages on [gecurrent.com](http://gecurrent.com).

## Ordering Information

SKU	Product Description
<b>WWD2-2SM</b>	Daintree Wireless 2-button Surface Mount Dimmer Switch
<b>WWD2-2IW</b>	Daintree Wireless 2-button Wall Mount Dimmer Switch

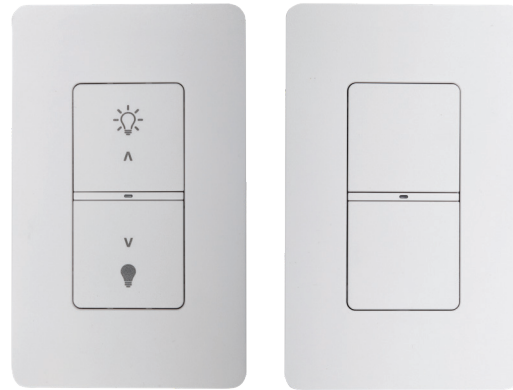

## Product Certifications



Operating Control  
E486320



FCC ID: 2AS3F-WWD2SM  
IC: 25008-WWD2SM

FCC ID: 2AS3F-WMD2IW  
IC: 25008-WMD2IW