
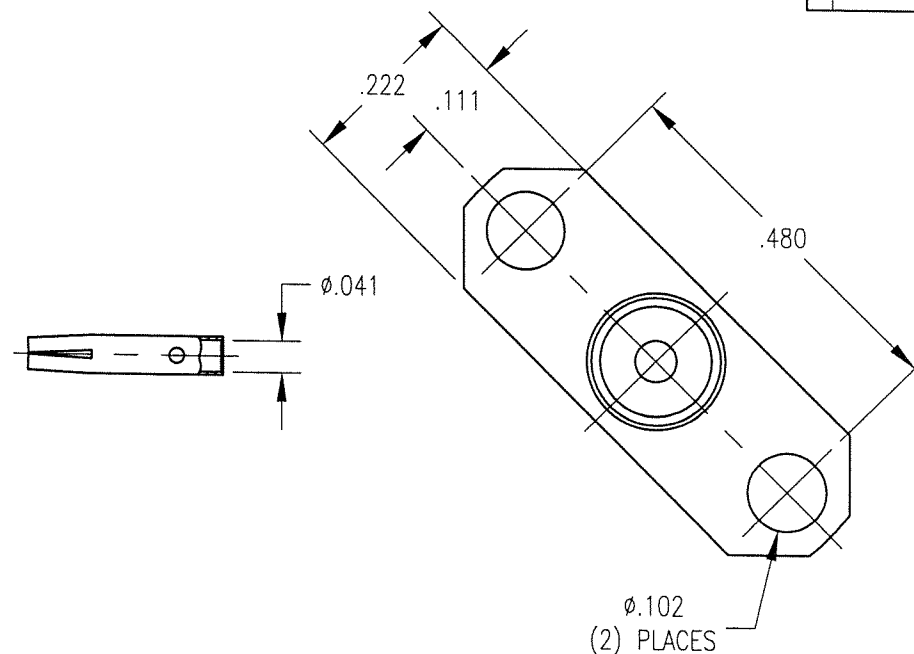


DWG. NO.		251-566-1410G	
REV	DESCRIPTION	BY DATE	APPD
A	RELEASE PER NPR 2068	10/17/00	

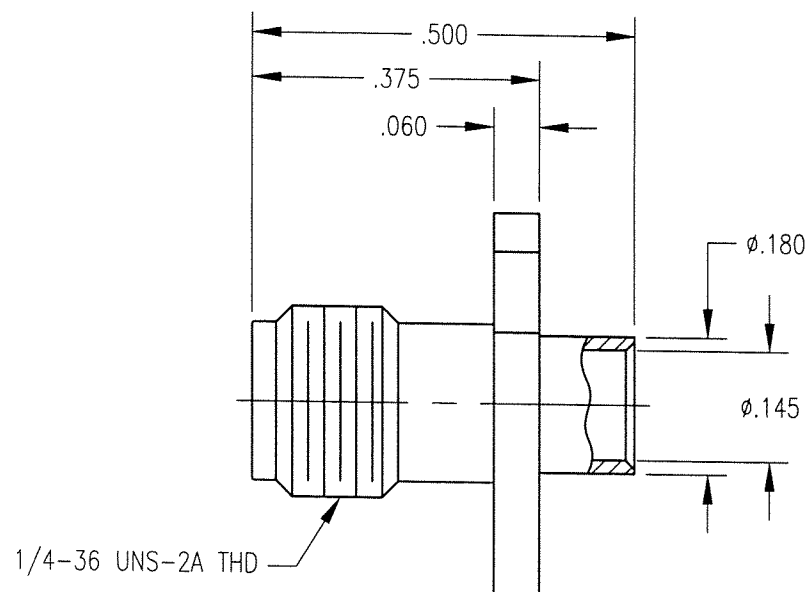

NOTES:

1. MATERIALS:

BODY: STAINLESS STEEL PER ASTM A582
 INSULATOR: TEFLON PER ASTM D1710
 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196

2. FINISH:

BODY: .000015 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 CENTER CONTACT: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290

3. DESIGNED FOR USE WITH .141 DIA. SEMI-RIGID CABLE.

4. FOR CABLING PROCEDURES USE CAP 5-02 WITH TRIMMING DIMENSIONS SHOWN.

CABLE TRIMMING DIMENSIONS

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM)				Littion Winchester/Retconn 400 Park Road Waterford, Connecticut 06795			
TOLERANCES: DECIMALS .XX $\pm .01/0.254$ XXX $\pm .005/0.127$ ANGLES $\pm 2^\circ$				SCALE: 4:1			
CUSTOMER DRAWING				TITLE SMA 2-HOLE FLANGE MOUNT RECEPTACLE			
DRAWN JED	DATE 7/25/00	CHECKED JH	DATE 7/26/00	A 251-566-1410G SH. 1 OF 1 REV. A			
APPROVED JMC	DATE 7/26/00	APPROVED KJT	DATE 7/26/00				