

## FEATURES & SPECIFICATIONS

**INTENDED USE** — Ideal for applications requiring attractive, thin-profile, die-cast aluminum signage.

**CONSTRUCTION** — Die-cast aluminum housing, thin profile. Clear lacquer, brushed aluminum inhibits fingerprints and other surface contaminants. Also available with white finish.

Universal directional chevron knockouts are completely concealed and easily removed.

Letters are 6" high with 3/4" stroke, with 100 ft. viewing distance rating, based upon UL924 standards.

**OPTICS** — The typical life of the exit LED lamp is 10 years.

Low energy consumption: one watt (120/277V).

**ELECTRICAL** — Dual-voltage input capability 120 or 277 VAC. Emergency models are provided with test switch, status indicator and a battery that automatically recharges when normal power is restored.

Battery: Emergency model provided with sealed, maintenance-free, nickel-cadmium battery that delivers 90 minutes of emergency power.

**INSTALLATION** — Universal mounting (top, end or back). Mounting knockouts and hole plugs are easily removed. Die-cast aluminum canopy is provided.

**LISTINGS** — UL Listed standard. Damp location listing 32°F to 122°F (0°C to 50°C) standard. Meets UL 924, NFPA 101 (current Life Safety Code), NFPA 70-NEC and OSHA illumination standards.

**WARRANTY** — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

† Exit Signs Certified in the CA Title 20 Appliance Efficiency Database.

|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

Thin Die-Cast Aluminum Exit



# TLE

LED Lamps



### ORDERING INFORMATION

All configurations of this product are considered "standard" and have short lead times.

**Example:** TLE 1 R EL N

| TLE Family | Housing color            | Number of faces | Letter color | Operation  |
|------------|--------------------------|-----------------|--------------|--|
| TLE        | (blank) Brushed aluminum | 1 Single face   | R Red        | (blank) AC only; 120/277V                                  |
|            | W White                  | 2 Double face   | G Green      | EL N 120/277 VAC input with nickel-cadmium battery back-up |

|   |                                   |
|---|-----------------------------------|
| <b>Accessories:</b> Order as separate catalog number. |                                   |
| ELA WG1   | Back-mount wireguard <sup>1</sup> |

**Notes**

1 See spec sheet [ELA-WG](#).

## SPECIFICATIONS

### ELECTRICAL

| Primary Circuit      |                  |                |             |           |
|----------------------|------------------|----------------|-------------|-----------|
| Type                 | Typical LED life | Supply voltage | Input watts | Max. amps |
| Red LED, AC only     | 10 years         | 120            | 1           | 0.1       |
|                      |                  | 277            | 1           | 0.1       |
| Green LED, AC only   | 10 years         | 120            | 1           | 0.1       |
|                      |                  | 277            | 1           | 0.1       |
| Red LED, emergency   | 10 years         | 120            | 1           | 0.1       |
|                      |                  | 277            | 1           | 0.1       |
| Green LED, emergency | 10 years         | 120            | 1           | 0.1       |
|                      |                  | 277            | 1           | 0.1       |


| BATTERY (EL N option)       |                           |                          |                                |
|-----------------------------|---------------------------|--------------------------|--------------------------------|
| Sealed Nickel-Cadmium, 2.4V |                           |                          |                                |
| Shelf life <sup>2</sup>     | Typical life <sup>3</sup> | Maintenance <sup>3</sup> | Temperature range <sup>4</sup> |
| 3 years                     | 6-8 years                 | None                     | 32° - 122°F (0° - 50°C)        |

### Notes

- 1 Based on continuous operation. The typical life of the exit LED lamp is 10 years.
- 2 At 77°F (25°C).
- 3 All life safety equipment, including emergency lighting path of egress, must be maintained, serviced and tested in accordance with all National Fire Protection Association and local codes. Failure to perform the required maintenance, service or testing could jeopardize the safety of occupants and will void all warranties.
- 4 Temperature range where unit will provide capacity for 90 minutes. Higher and lower temperatures affect life and capacity.

## MOUNTING

All dimensions are inches (centimeters).  
Shipping weight: 3 lbs. (1.3 kgs.).

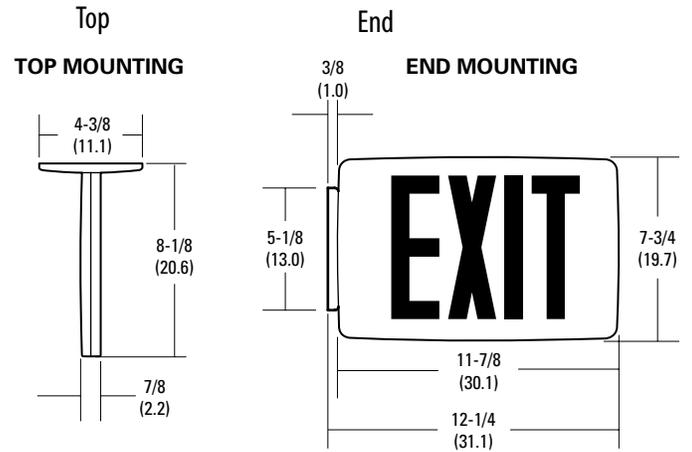

### Backplate

#### BACK MOUNTING

