

APPLICATIONS

Lighting installations for side and top mounting of luminaires with effective projected area (EPA) not exceeding maximum allowable loading of the specified pole in its installed geographic location.




CONSTRUCTION

Shaft:	One-piece straight aluminum with round cross section; Extruded shafts of 6061-T6 aluminum in 1/8", 3/16", or 1/4" thickness. Base plate of 356 cast aluminum
Bolt Covers:	Four (4) individual bolt covers provided, painted to match pole and base finish
Base Cover:	2-Piece base cover supplied with 3" diameter poles
Pole Cap:	Pole shaft supplied with removable cover when applicable; Tenon and post-top configurations also available
Hand Hole:	Rectangular 3x5 aluminum hand hole frame (2.38" x 4.38" opening); Mounting provisions for grounding lug located behind gasketed cover
Anchor Bolt:	Four galvanized anchor bolts provided per pole with minimum yield of 55,000 psi (ASTM F1554). Galvanized hardware with two washers and two nuts per bolt for leveling



FINISH

- Durable thermoset polyester powder coat paint finish with nominal 3.0 mil thickness
- Powder paint finish coat available in three standard colors; Custom colors available; RAL number preferable

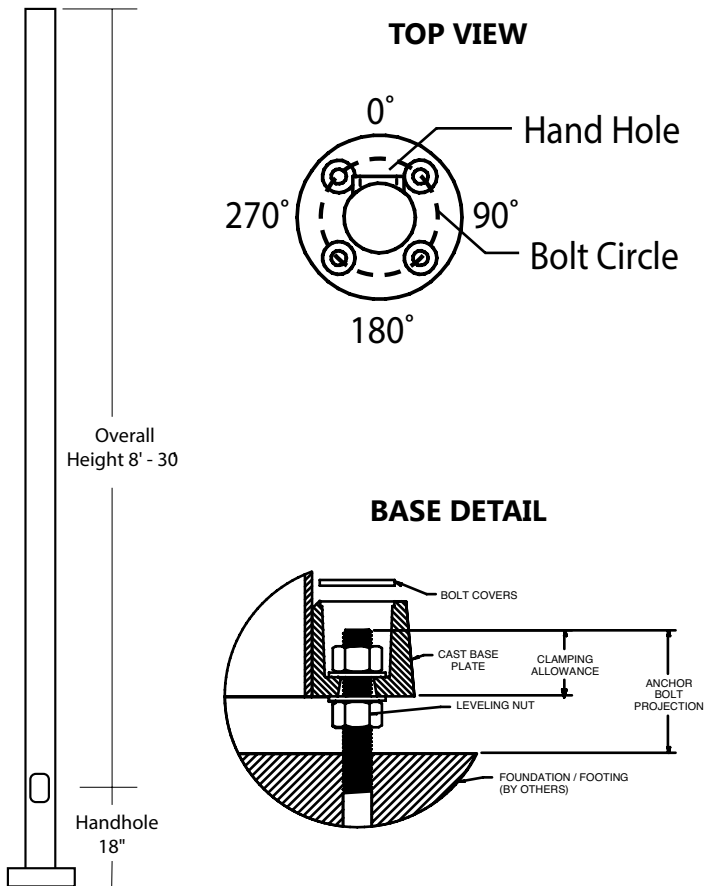

POLE CAP

TENON



RSA-E Series Poles

Round | Straight | Aluminum

Ordering Information

Project Name _____

Date _____ Type _____

Notes _____

Example: RSA-E-16-40-A/B/C-2-DKBZ-VM2


RSA-E


SERIES	HEIGHT	SHAFT	THICKNESS	MOUNTING	FINISH	OPTIONS
RSA-E = Evolve Round Straight Aluminum Pole	Reference page 3 Ordering Guide	Reference page 3 Ordering Guide	Reference page 3 Ordering Guide	1 = Single arm mount 2 = Two fixtures at 180° 2L = Two fixtures at 90° 3T = Three fixtures at 90° 3Y = Three fixtures at 120° 4 = Four fixtures at 90° TA = Tenon (2.375" OD) TB = Tenon (2.875" OD) OT = Open Top (includes pole cap)	DKBZ = Dark Bronze BLCK = Black GRAY = Gray <i>* Contact factory for custom color options</i>	GFI¹ = 20 Amp GFCI Receptacle and Cover EHH¹ = Extra Handhole C05¹ = 0.5" Coupling C07¹ = 0.75" Coupling C20¹ = 2" Coupling VM2 = 2nd mode vibration damper LAB = Less Anchor Bolts

NOTES:

1. Specify option location using MOUNTING ORIENTATION logic shown on this page

MOUNTING ORIENTATION

 Denotes handhole location

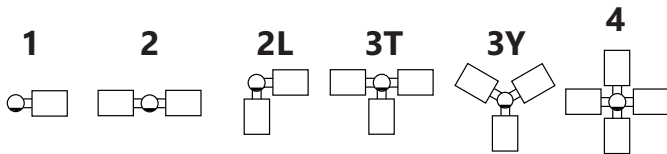

ACCESSORIES - ORDER SEPARATELY

CATALOG NUMBER	DESCRIPTION
VM2SXX*	2nd mode vibration damper

* XX = 08 for 8', 12 for 12', 15 for 16', 20 for 20', and 24' for 24'

RSA-E Series Poles

Round | Straight | Aluminum

Ordering Information

Project Name _____

Date _____ Type _____

Notes _____

CATALOG NUMBER	HEIGHT		NOMINAL SHAFT DIMENSIONS	WALL THICKNESS	BOLT CIRCLE (SUGGESTED)	BOLT SQUARE (RANGE)	BASE PLATE DIAMETER	ANCHOR BOLT SIZE	BOLT PROJECTION	POLE WEIGHT
	FEET	METERS								
RSA-E-08-30-A	8	2.4	3" round	0.125"	6"	5.66"	Triangular	5/8"x24"x3"	2-3/4"	18
RSA-E-05-30-C	8	2.4	3" round	.25"	6"	5.66"	Triangular	5/8"x24"x3"	2-3/4"	28

RSA-E-10-40-A	10	3.0	4" round	0.125"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	27
RSA-E-12-40-A	12	3.7	4" round	0.125"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	31
RSA-E-14-40-A	14	4.3	4" round	0.125"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	36
RSA-E-16-40-A	16	4.9	4" round	0.125"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	40
RSA-E-18-40-A	18	5.5	4" round	0.125"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	45
RSA-E-20-40-A	20	6.1	4" round	0.125"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	50

RSA-E-10-40-B	10	3.0	4" round	0.188"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	38
RSA-E-12-40-B	12	3.7	4" round	0.188"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	44
RSA-E-14-40-B	14	4.3	4" round	0.188"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	51
RSA-E-16-40-B	16	4.9	4" round	0.188"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	58
RSA-E-18-40-B	18	5.5	4" round	0.188"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	65
RSA-E-20-40-B	20	6.1	4" round	0.188"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	71






RSA-E-12-40-C	12	3.7	4" round	.25"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	57
RSA-E-14-40-C	14	4.3	4" round	.25"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	66
RSA-E-16-40-C	16	4.9	4" round	.25"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	75
RSA-E-18-40-C	18	5.5	4" round	.25"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	83
RSA-E-20-40-C	20	6.1	4" round	.25"	6.75"	4.77"	9.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	92

RSA-E-12-50-B	12	3.7	5" round	0.188"	7.75"	5.48"	10.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	56
RSA-E-14-50-B	14	4.3	5" round	0.188"	7.75"	5.48"	10.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	64
RSA-E-16-50-B	16	4.9	5" round	0.188"	7.75"	5.48"	10.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	73
RSA-E-18-50-B	18	5.5	5" round	0.188"	7.75"	5.48"	10.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	81
RSA-E-20-50-B	20	6.1	5" round	0.188"	7.75"	5.48"	10.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	90
RSA-E-25-50-B	25	7.6	5" round	0.188"	7.75"	5.48"	10.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	111

RSA-E-16-60-A	16	4.9	6" round	0.125"	8.75"	6.19"	11.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	60
RSA-E-18-60-A	18	5.5	6" round	0.125"	8.75"	6.19"	11.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	67
RSA-E-20-60-A	20	6.1	6" round	0.125"	8.75"	6.19"	11.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	74
RSA-E-25-60-A	25	7.6	6" round	0.125"	8.75"	6.19"	11.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	91

RSA-E-18-60-C	18	5.5	6" round	.25"	8.75"	6.19"	11.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	127
RSA-E-20-60-C	20	6.1	6" round	.25"	8.75"	6.19"	11.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	140
RSA-E-25-60-C	25	7.6	6" round	.25"	8.75"	6.19"	11.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	174
RSA-E-30-60-C	30	9.1	6" round	.25"	8.75"	6.19"	11.62" Dia x 1.88" Thk	3/4"x30"x3"	2-3/4"	208

NOTES:
 1. Factory supplied template must be used when setting anchor bolts. Current will deny any claim for incorrect anchorage placement resulting from failure to use factory supplied template and anchor bolts.



OPTION ORIENTATION

Follow the logic below when ordering location specific options. For each option, include its orientation (in degrees) and its height (in feet).
Example: Option C07 should be ordered as: RSA-E-20-40-A-TA-DBT-CO7-0-15 (5" coupling on the handhole/arm side of pole, 15 feet up from the pole base) 1' spacing required between option. Consult factory for other configurations.

RSA-E Series Poles

Round | Straight | Aluminum


EPA Load Rating - Wind Maps

Project Name _____


Date _____ Type _____

Notes _____


ASCE7-05 WIND MAP

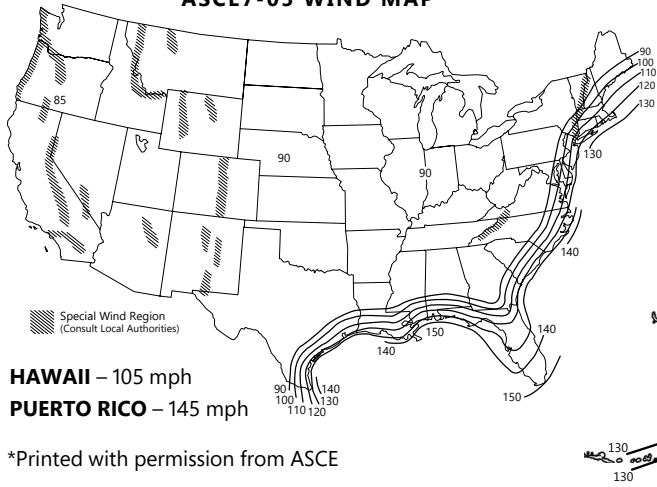

ALASKA REGION WIND MAP

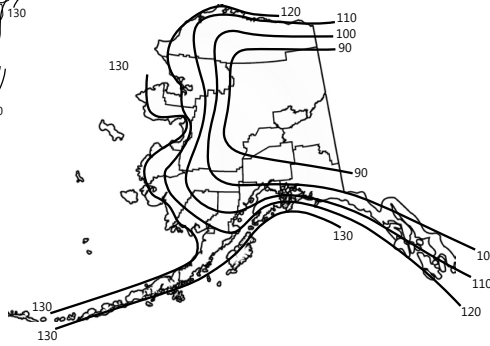

FLORIDA REGION WIND MAP

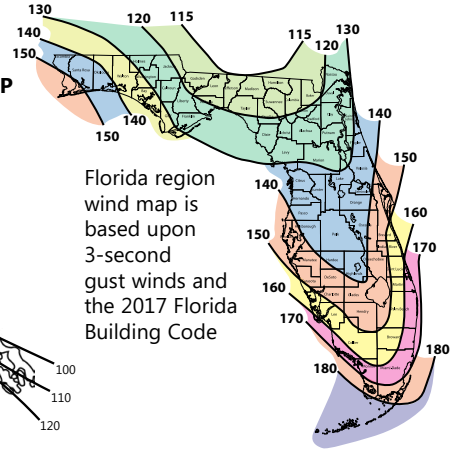

*Printed with permission from ASCE

ASCE 7-05 wind map EPA Load Rating - 3 second gust wind speeds (Use for all locations except Florida)										
Catalog Number	85	90	100	105	110	120	130	140	145	150
RSA-E-08-30-A	6.3	5.5	4.3	3.8	3.4	2.7	2.2	1.7	1.5	1.4
RSA-E-08-30-C	11.8	10.5	8.5	7.6	6.9	5.6	4.7	3.9	3.6	3.3

Florida Building Code 2017 EPA Load Rating - 3 second gust wind speeds (Use for Florida only)								
Catalog Number	115	120	130	140	150	160	170	180
RSA-E-08-30-A	4.5	4.1	3.3	2.7	2.2	1.8	1.5	1.2
RSA-E-08-30-C	8.8	8.1	6.8	5.7	4.9	4.1	3.5	3.0

RSA-E-10-40-A	9.0	7.9	6.2	5.5	4.8	3.9	3.2	2.7	2.5	2.3
RSA-E-12-40-A	6.8	5.9	4.5	3.9	3.4	2.6	2.1	1.7	1.6	1.4
RSA-E-14-40-A	5.1	4.4	3.1	2.6	2.2	1.6	1.2	0.9	0.8	0.7
RSA-E-16-40-A	3.8	3.2	2.1	1.6	1.3	0.7	0.5	NR	NR	NR
RSA-E-18-40-A	2.7	2.1	1.2	0.8	NR	NR	NR	NR	NR	NR
RSA-E-20-40-A	1.7	1.2	NR	NR	NR	NR	NR	NR	NR	NR

RSA-E-10-40-A	6.4	5.8	4.7	3.8	3.1	2.5	2.4	2.3
RSA-E-12-40-A	4.6	4.1	3.2	2.4	1.8	1.7	1.6	1.5
RSA-E-14-40-A	3.2	2.8	2.0	1.4	0.9	NR	NR	NR
RSA-E-16-40-A	2.1	1.7	1.0	0.5	NR	NR	NR	NR
RSA-E-18-40-A	1.1	0.8	NR	NR	NR	NR	NR	NR
RSA-E-20-40-A	NR	NR	NR	NR	NR	NR	NR	NR

RSA-E-10-40-B	13.7	12.1	9.6	8.6	7.7	6.3	5.3	4.5	4.2	3.9
RSA-E-12-40-B	10.7	9.4	7.3	6.5	5.7	4.6	3.8	3.2	3.0	2.7
RSA-E-14-40-B	8.4	7.3	5.6	4.9	4.2	3.3	2.7	2.2	2.0	1.9
RSA-E-16-40-B	6.6	5.8	4.2	3.6	3.0	2.2	1.8	1.4	1.3	1.1
RSA-E-18-40-B	5.1	4.3	3.0	2.4	2.0	1.3	1.0	0.7	0.6	0.5
RSA-E-20-40-B	3.8	3.1	2.0	1.5	1.1	0.5	NR	NR	NR	NR

RSA-E-10-40-B	10.1	9.1	7.6	6.3	5.3	4.4	4.2	3.9
RSA-E-12-40-B	7.6	6.9	5.6	4.5	3.7	2.9	2.8	2.7
RSA-E-14-40-B	5.8	5.1	4.0	3.1	2.4	1.8	1.6	1.4
RSA-E-16-40-B	4.3	3.7	2.7	2.0	1.3	0.8	0.5	NR
RSA-E-18-40-B	3.0	2.5	1.7	1.0	NR	NR	NR	NR
RSA-E-20-40-B	1.9	1.5	0.7	NR	NR	NR	NR	NR

RSA-E-12-40-C	14.1	12.5	9.9	8.8	7.9	6.4	5.4	4.6	4.2	3.9
RSA-E-14-40-C	11.3	9.9	7.7	6.8	6.0	4.8	4.0	3.4	3.1	2.9
RSA-E-16-40-C	9.1	7.9	6.0	5.3	4.6	3.5	2.9	2.4	2.2	2.0
RSA-E-18-40-C	7.3	6.3	4.6	3.9	3.3	2.4	1.9	1.6	1.4	1.2
RSA-E-20-40-C	5.7	4.8	3.4	2.8	2.3	1.5	1.1	0.8	0.7	0.6

RSA-E-12-40-C	10.3	9.3	7.7	6.4	5.3	4.4	4.2	4.0
RSA-E-14-40-C	8.0	7.2	5.8	4.7	3.8	3.0	2.8	2.6
RSA-E-16-40-C	6.2	5.5	4.3	3.3	2.5	1.9	1.7	1.5
RSA-E-18-40-C	4.6	4.0	3.0	2.1	1.5	0.9	0.7	0.5
RSA-E-20-40-C	3.3	2.8	1.9	1.2	0.6	NR	NR	NR

RSA-E-12-50-B	18.1	16.0	12.9	11.7	10.6	8.9	7.5	6.4	5.9	5.5
RSA-E-14-50-B	14.6	12.8	10.2	9.2	8.4	7.0	5.8	5.0	4.6	4.3
RSA-E-16-50-B	11.9	10.3	8.1	7.3	6.6	5.4	4.5	3.8	3.5	3.3
RSA-E-18-50-B	9.5	8.2	6.3	5.7	5.1	4.2	3.4	2.8	2.6	2.4
RSA-E-20-50-B	7.5	6.4	4.8	4.3	3.8	3.0	2.4	2.0	1.8	1.6
RSA-E-25-50-B	3.8	2.9	1.9	1.6	1.3	0.9	0.6	NR	NR	NR

RSA-E-12-50-B	13.2	12.0	9.9	9.4	8.0	6.8	5.9	5.1
RSA-E-14-50-B	10.4	9.3	7.5	7.0	6.3	5.3	4.5	3.8
RSA-E-16-50-B	8.0	7.1	5.6	5.3	4.9	4.0	3.3	2.7
RSA-E-18-50-B	6.1	5.3	3.9	3.6	3.3	3.0	2.3	1.8
RSA-E-20-50-B	4.4	3.7	2.9	2.8	2.7	2.1	1.5	1.1
RSA-E-25-50-B	1.3	0.7	1.0	0.5	NR	NR	NR	NR

RSA-E-16-60-A	11.9	10.6	8.4	7.6	6.9	5.7	4.7	4.0	3.7	3.4
RSA-E-18-60-A	9.5	8.4	6.7	6.0	5.4	4.4	3.6	3.0	2.8	2.5
RSA-E-20-60-A	7.5	6.5	5.1	4.6	4.1	3.3	2.7	2.2	2.0	1.8
RSA-E-25-60-A	3.6	3.1	2.2	1.9	1.6	1.1	0.8	0.5	NR	NR

RSA-E-16-60-A	9.3	8.4	6.8	5.5	4.5	3.7	2.9	2.3
RSA-E-18-60-A	7.4	6.6	5.3	4.2	3.3	2.5	1.9	1.4
RSA-E-20-60-A	5.9	5.2	4.0	3.0	2.2	1.6	1.0	0.6
RSA-E-25-60-A	3.0	2.4	1.5	0.8	0.2	NR	NR	NR

RSA-E-18-60-C	21.4	19.1	15.5	14.0	12.0	9.9	8.3	7.0	6.5	6.0
RSA-E-20-60-C	17.9	15.9	12.8	11.6	10.5	8.1	6.8	5.7	5.2	4.8
RSA-E-25-60-C	11.4	10.1	8.0	7.2	6.5	4.8	3.9	3.2	2.9	2.6
RSA-E-30-60-C	6.9	6.0	4.6	4.1	3.6	2.4	1.8	1.4	1.2	1.1

RSA-E-18-60-C	16.5	15.0	12.4	10.4	8.7	7.4	6.2	5.2
RSA-E-20-60-C	13.8	12.5	10.3	8.5	7.0	5.8	4.8	4.0
RSA-E-25-60-C	9.0	8.0	6.3	4.9	3.8	2.9	2.1	1.5
RSA-E-30-60-C	5.6	4.8	3.5	2.4	1.5	0.8	NR	NR

NOTES

Wind-speed Website disclaimer:

Current has no connection to the linked website and makes no representations as to its accuracy. While the information presented on this third-party website provides a useful starting point for analyzing wind conditions, Current has not verified any of the information on this third party website and assumes no responsibility or liability for its accuracy. The material presented in the windspeed website should not be used or relied upon for any specific application without competent examination and verification of its accuracy, suitability and applicability by engineers or other licensed professionals. Current Inc. does not intend that the use of this information replace the sound judgment of such competent professionals, having experience and knowledge in the field of practice, nor to substitute for the standard of care required of such professionals in interpreting and applying the results of the windspeed report provided by this website. Users of the information from this third party website assume all liability arising from such use. Use of the output of these referenced websites do not imply approval by the governing building code bodies responsible for building code approval and interpretation for the building site described by latitude/longitude location in the windspeed report. <http://windspeed.atcouncil.org>

1. Allowable EPA, to determine max pole loading weight, multiply allowable EPA by 30 lbs.
2. The tables for allowable pole EPA are based on the ASCE 7-05 Wind Map or the Florida Region Wind Map for the 2010 Florida Building Code. The Wind Maps are intended only as a general guide and cannot be used in conjunction with other maps. Always consult local authorities to determine maximum wind velocities, gusting and unique wind conditions for each specific application
3. Allowable pole EPA for jobsite wind conditions must be equal to or greater than the total EPA for fixtures, arms, and accessories to be assembled to the pole. Responsibility lies with the specifier for correct pole selection. Installation of poles without luminaires or attachment of any unauthorized accessories to poles is discouraged and shall void the manufacturer's warranty
4. Wind speeds and listed EPAs are for ground mounted installations. Poles mounted on structures (such as bridges and buildings) must consider vibration and coefficient of height factors beyond this general guide; Consult local and federal standards
5. Wind Induced Vibration brought on by steady, unidirectional winds and other unpredictable aerodynamic forces are not included in wind velocity ratings. Consult Current's Pole Vibration Application Guide for environmental risk factors and design considerations: <http://images.salsify.com/image/upload/s--Uk0Lfj10--/bf7prkg0aey64uqoipso>
6. Extreme Wind Events like, Hurricanes, Typhoons, Cyclones, or Tornadoes may expose poles to flying debris, wind shear or other detrimental effects not included in wind velocity ratings

Due to our continued efforts to improve our products, product specifications are subject to change without notice.