


## versatile™ 4C Surface Mount Collar, SM13D

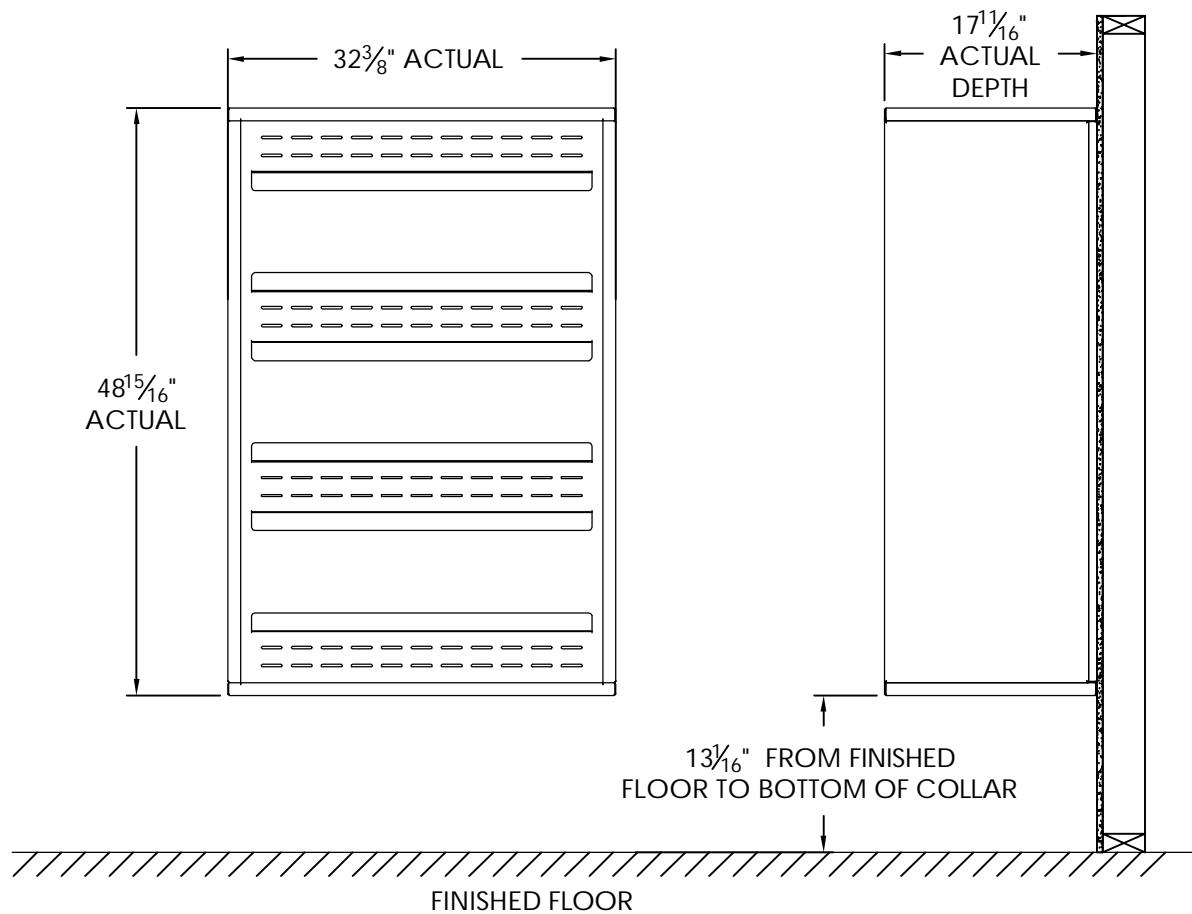

### Notes:


1. Designed to mount Florence Versatile™ 4C mailbox double column 13-High Suite modules (sold separately).
2. For use with front loading modules only.

### PRODUCT SERIES: VERSATILE™ 4C SURFACE MOUNT COLLAR

**AF FLORENCE**  
manufacturing company  
5935 Corporate Drive • Manhattan, KS 66503  
[www.florencemailboxes.com](http://www.florencemailboxes.com) • (800) 275-1747  
A GIBRALTAR INDUSTRIES COMPANY

MODEL	SM13D	REV	B
SCALE	NONE	LAST REV DATE	7/02/2014
DRAWING NUMBER	SM13DCS	DRAWN BY	TNS

# versatile™ 4C Mailbox, 4C13D-15

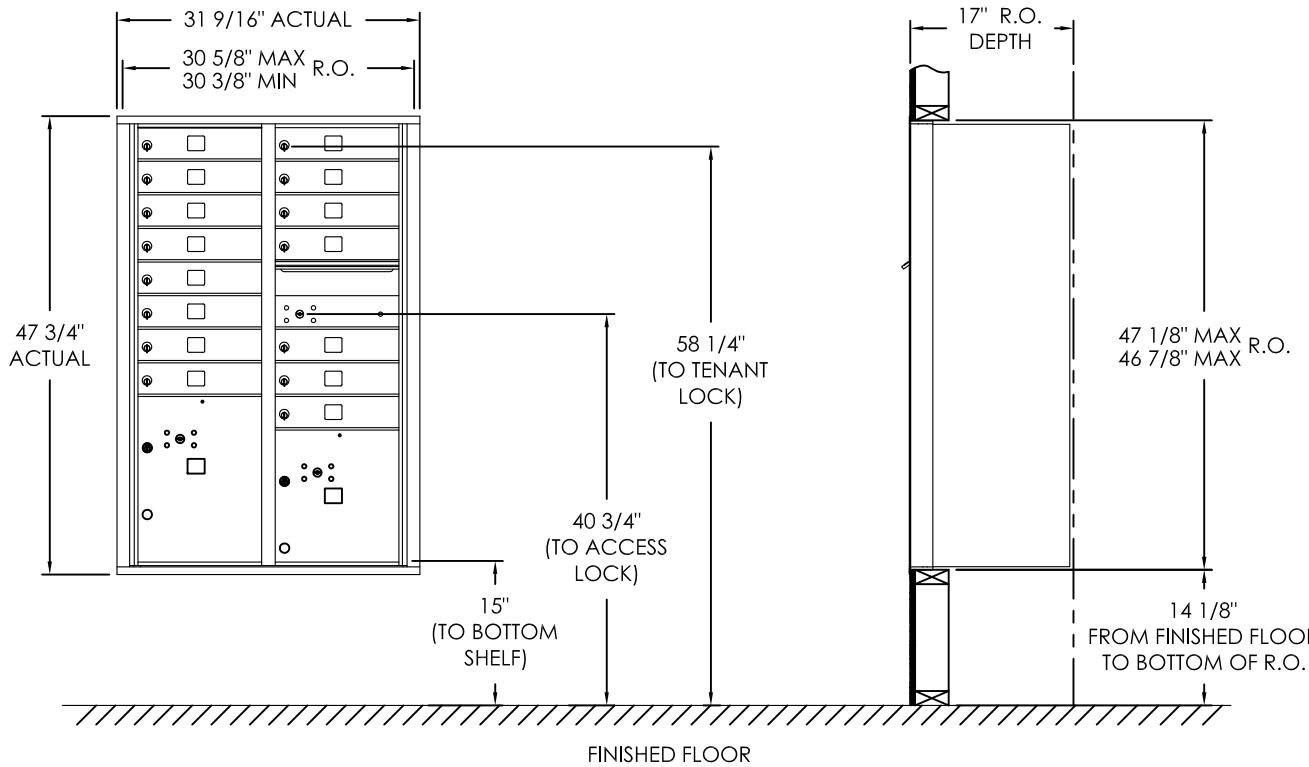

## Notes:

1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
  - a. At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
  - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
  - c. No patron (tenant) lock shall be positioned more than 67" AFF.
  - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
  - e. The USPS Arrow lock shall be positioned 36"- 48" AFF.
2. This 4C mailbox can also be used for private applications.
3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: [www.florencemailboxes.com/configurator](http://www.florencemailboxes.com/configurator).

PRODUCT SERIES: **VERSATILE™ 4C FRONT LOAD MAILBOX**

**FLORENCE**  
CORPORATION  
5935 Corporate Drive • Manhattan, KS 66503  
800.275.1747 • [www.florencemailboxes.com](http://www.florencemailboxes.com)

DOOR TYPE	PART NUMBER	Compartment Size	Number
MAILBOX	MB1	3" H x 12" W x 15" D	15
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1
PARCEL	PL4	13-1/2" H x 12" W x 15" D	1
PARCEL	PL5	17" H x 12" W x 15" D	1

MODEL	4C13D-15	REV	B
SCALE	NONE	LAST REV DATE	07/09/19
DRAWING NUMBER	4C13D-15CS	DRAWN BY	RAK