



Technical Support

If you need technical support with your Boss Audio product or have questions about its use, please contact us:

805.751.4853

www.BossAudio.com

Congratulations on your purchase of the Boss Audio CX Series Subwoofer. Boss Audio takes great pride in producing products that look great, sound great, and stand up to the daily rigors applied by audio enthusiasts around the world.

*Due to ongoing product development, specifications are subject to change without notice.




CX10 10" (25cm) Subwoofer

- *Single 4 Ω Voice Coil*
- *600 W Peak Power Handling*
- *High Temperature Voice Coil*
- *Foam Surround*


Enclosures

The CX10 will operate in both sealed and ported enclosure. Since the woofer has pole-vent, it needs a minimum clearance from the rear wall of the enclosure of 0.75" (19 mm). Below you will find the dimensions to make the enclosure to suit the subwoofers needs, it has been designed for maximum output while retaining great sound quality. The dimensions have already accounted for the volume displacement of the subwoofer, and using 3/4" (19mm) MDF. All dimensions are external.

Enclosure Dimensions

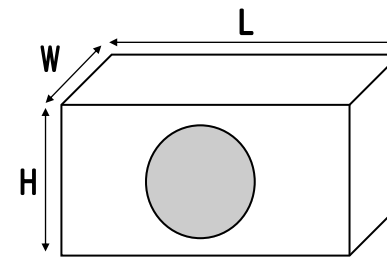

Sealed Dimensions:
 Length (L) : 19" (483 mm)
 Width (W) : 11.5" (292 mm)
 Height (H) : 13.5" (343 mm)
 Cutout Diameter: 9-1/16" (230 mm)
 Int. Volume: 1.2 ft³

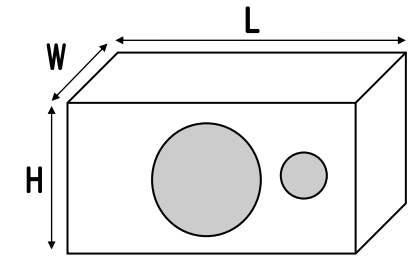

Ported Dimensions:
 Length (L) : 20.5" (521mm)
 Width (W) : 14.75" (375 mm)
 Height (H) : 12" (305 mm)
 Cutout Diameter: 9-1/8" (230 mm)
 Port Dimensions: 3"x 7" (76 x 178mm)
 Tuning Freq: 37 Hz
 Int. Volume: 1.5ft³




Wiring your Subwoofer

4 Ω



Multiple Subwoofers

Parallel
2 Ω



Series
8 Ω



Product Specifications

Impedance	4 Ω
Resonant Frequency	36 Hz
Qts	1.193
Qms	8.639
Qes	1.384
Vas	2.679 cu ft. (75.9 liters)
Xmax	4 mm
Sensitivity (1 W/ 1 m)	87 dB
Peak Power Handling	600 W
Mounting Depth	3-3/4" (95 mm)
Cutout Diameter	9-1/16" (230 mm)