

2-Port Dual-Monitor HDMI/DisplayPort KVM Switch - 4K 60Hz - USB 5Gbps


Product ID

P2ADDH462-KVM-SWITCH

Front View



Rear View

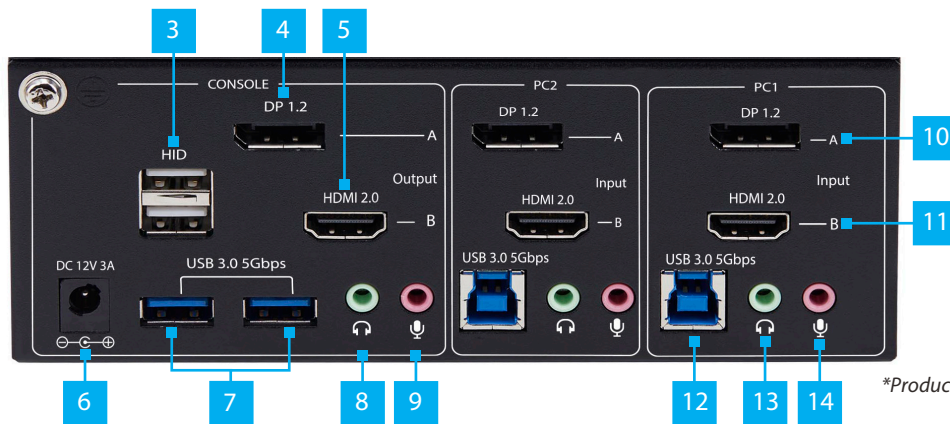

*Product may vary from image

Component	Function
1 LED Indicators	<ul style="list-style-type: none"> • PC LED: Solid Green when a Host Connection is detected • PC LED: Blinking Green when a Host Connection is not detected • Hub LED: Solid Red when the PC Port selected
2 Push Button Selector	<ul style="list-style-type: none"> • Press the Button to switch to the corresponding PC Port
3 USB HID Ports	<ul style="list-style-type: none"> • Connect a Human Interface Device (HID) (e.g. Keyboard, Mouse, Trackpad, Number Keypad, or Drawing Tablet)
4 Console DisplayPort Output	<ul style="list-style-type: none"> • Connect to a DisplayPort Monitor
5 Console HDMI Output	<ul style="list-style-type: none"> • Connect to an HDMI Monitor
6 DC Power Input Port	<ul style="list-style-type: none"> • Connect the supplied Universal Power Adapter to the KVM Switch
7 USB 5Gbps Hub Ports	<ul style="list-style-type: none"> • Connect a USB 5Gbps Peripheral Device
8 Console Audio Output Port	<ul style="list-style-type: none"> • Green: Connect an Audio Device (e.g. Speakers or Headphones)
9 Console Audio Input Port	<ul style="list-style-type: none"> • Pink: Connect an Audio Input Device (e.g. Microphone)
10 DisplayPort Inputs	<ul style="list-style-type: none"> • Connect to a DisplayPort Output Port on PC 1 - 2
11 HDMI Inputs	<ul style="list-style-type: none"> • Connect to an HDMI Output Port on PC 1 - 2
12 PC 1 - 2 USB Host Connection	<ul style="list-style-type: none"> • Connect to a Computer with a USB 5Gbps Port
13 PC 1 - 2 Headphone Port	<ul style="list-style-type: none"> • Connect to a Headphone Port on PC 1 - 2
14 PC 1 - 2 Microphone Port	<ul style="list-style-type: none"> • Connect to a Microphone Port on PC 1 - 2

Package Contents

- KVM Switch x 1
- Universal Power Adapter (NA/EU/UK/ANZ) x 1
- Quick-Start Guide x 1

Requirements

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit:

www.StarTech.com/P2ADDH462-KVM-SWITCH

Source PCs

- DisplayPort Enabled Computer x 2
- DisplayPort Cable x 2
- HDMI Cable x 2
- (Optional) 3.5mm TRS Audio Cable x 4

Console

- DisplayPort Display x 1
- DisplayPort Cable x 1
- HDMI Display x 1
- HDMI Cable x 1
- USB Mouse x 1
- USB Keyboard x 1
- (Optional) Audio Devices (e.g. Headphones/Microphone) x 2
- (Optional) SuperSpeed USB 5Gbps Devices x 2

Installation

Connect the Console

Note: Power off all Computers, Displays, and Peripherals before completing the following steps.

1. Connect the **DisplayPort Display** to the **Console DisplayPort Port**, located on the rear of the **KVM Switch**, using a **DisplayPort Cable** (sold separately).
2. Connect the **HDMI Display** to the **Console HDMI Port**, located on the rear of the **KVM Switch**, using an **HDMI Cable** (sold separately).
3. Connect a **USB Mouse** and a **USB Keyboard** to the **Console USB HID Ports**, located on the rear of the **KVM Switch**.
4. (Optional) Connect **Headphones** or **Speakers** to the **Console Audio Output Port**, located on the rear of the **KVM Switch**, using a **3.5mm Audio Cable** (sold separately).
5. (Optional) Connect a **Microphone** to the **Console Audio Input Port**, located on the rear of the **KVM Switch**, using a **3.5mm Audio Cable** (sold separately).
6. (Optional) Connect up to two **SuperSpeed USB 5Gbps Devices** to the **Console USB Hub Ports**, located on the rear of the **KVM Switch**.

Connect the PCs

7. Connect a **DisplayPort Cable** (sold separately) from the **DisplayPort Output Port** on the **Computer** to the **PC 1 DisplayPort Input Port**, located on the rear of the **KVM Switch**.
8. Connect an **HDMI Cable** (sold separately) from the **HDMI Output Port** on the **Computer** to the **PC 1 HDMI Input Port**, located on the rear of the **KVM Switch**.
9. Connect a **USB to USB 5Gbps Type-B Cable** (sold separately) from a **USB Port** on the **Computer** to the **PC 1 USB Host Connection**, located on the rear of the **KVM Switch**.
10. (Optional) Connect a **3.5mm Audio Cable** (sold separately) from a **Headphone Port** on the **Computer** to the **PC 1 Headphone Port**, located on the rear of the **KVM Switch**.
11. (Optional) Connect a **3.5mm Audio Cable** (sold separately) from a **Microphone Port** on the **Computer** to the **PC 1 Microphone Port**, located on the rear of the **KVM Switch**.
12. Repeat **Steps 1 to 5** for the remaining **PC**.
13. Connect the included **Power Adapter** from an available **Wall Outlet** to the **DC Power Input Port**, located on the rear of the **KVM Switch**.
14. Power on all connected **Peripheral Devices**.

StarTech.com Ltd.
45 Artisans Crescent
London, Ontario
N5V 5E9
Canada

StarTech.com LLP
4490 South Hamilton
Road
Groveport, Ohio
43125
U.S.A.

StarTech.com Ltd.
Unit B, Pinnacle 15
Gowerton Road
Brackmills,
Northampton
NN4 7BW
United Kingdom

StarTech.com Ltd.
Siriusdreef 17-27
2132 WT Hoofddorp
The Netherlands

FR: startech.com/fr
DE: startech.com/de
ES: startech.com/es
NL: startech.com/nl
IT: startech.com/it
JP: startech.com/jp

