
# Gainsborough

## **Avant Series with QuickFix™ - Passage and Privacy** Installation Instructions


#### Step 1.

- · Fold template where indicated.
- Position template on door edge at desired latch height (suggested height is 970mm from floor).
- Firmly hold template and mark latch height and handle fixing holes at 60mm backset (refer template).
- Measure door thickness and mark centre.
- Drill 25mm (1") latch hole. **Note:** it is important to drill this hole squarely.
- Drill one 50mm (2") hole or one 54mm (2 1/x") hole through door face at required backset as marked on template.



#### Step 2.

- Mark and chisel door edge for latch face plate to a recess of 2mm or until flush with door. Use latch face plate as a template.
- Pre-drill wood screw holes with suitable drill size.
- Insert latch and fasten with wood screws provided.




Latch is included with selected passage sets only. Latches can be ordered separately.

### Step 3.

Email


www.allegion.com.au

 Attach QuickFix furniture with preinstalled studs and screws.



#### Step 4.

· Install furniture.



Continued on next page

Carefully follow these instructions when installing. Screws to be hand tightened to a recommended 2.5Nm torque.


NOTE:



info.au@allegion.com

Mark centre-line of latch hole


Mark centre-line of latch hole

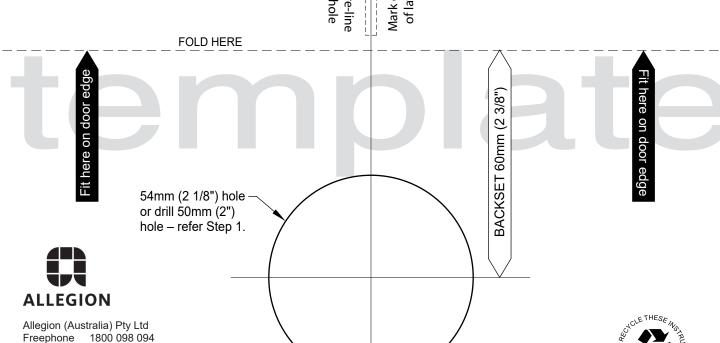




Gainsborough

## **Avant Series with QuickFix<sup>™</sup> - Passage and Privacy** Installation Instructions

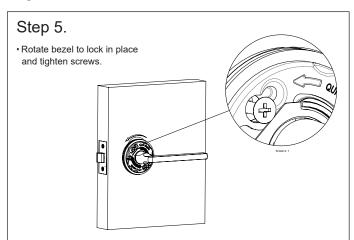


#### Step 6.

- Measure Ø8mm either side of centre mark, drill Ø25x15mm hole.
- Use strike as a guide to mark and chisel recess, allowing space behind strike plate for the dust box.
- Insert dust box, drill holes and screw strike in place.




#### Step 7.

• Fit rose cover.



#### Step 8. (For privacy function only)

· Fit privacy pin.




3

www.allegion.com.au

Mark centre-line of latch hole

Mark centre-line of latch hole

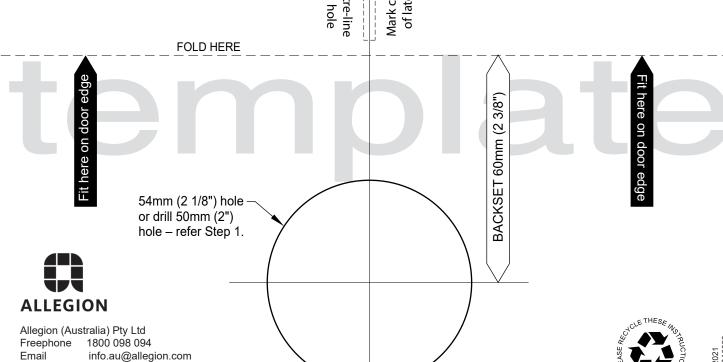

NOTE: Carefully follow these instructions when installing. Screws to be hand tightened to a recommended 2.5Nm torque.

PDGA009