

INSTALLATION INSTRUCTIONS

WARNING NEVER attempt any work without shutting off the electricity.

- Read all instructions before installing.
- System is intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
- Go to the main fuse box, or circuit breaker. Place the main power switch in the "OFF" position and unscrew the fuse(s) or switch "OFF" the circuit breaker switch(es) that control the power to the fixture or room that you are working on.
- Place the wall switch in the "OFF" position.
- Supply conductors(Power Wires) Connecting the fixture must be rated minimum 90 °C. If uncertain, consult an electrician.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver



Pliers



Wire strippers


INCLUDED ACCESSORIES BAG



Wire Connector
Qty: 4 pcs
P3




Junction Box Screw
Qty: 2 pcs
#8-32, * 3/4"



Mounting Plate
Qty: 1 pc

INSTALLATION

3 inch/4 inch Junction Box

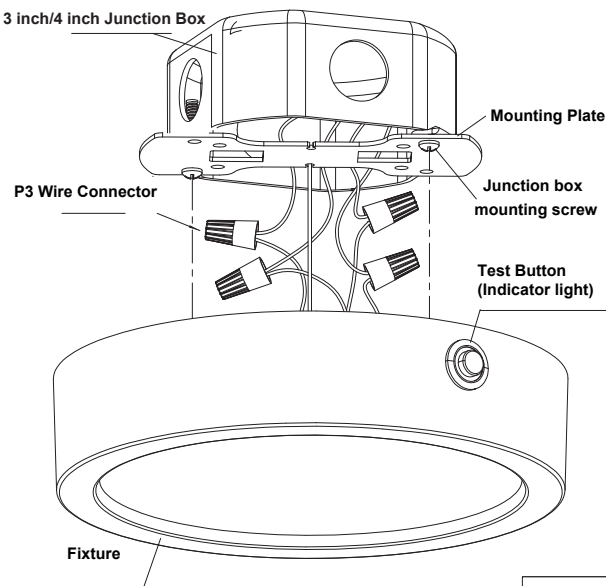

1. Prior to installation, install the mounting plate on the junction box with mounting screws. Drive screws completely to the end of the junction box.
2. Attach support cable to the slotted holes on mounting plate, and carefully allow support cable to support the weight of the fixture while wiring. Make electrical wiring connections between fixture and power supply (see ELECTRICAL WIRING DIAGRAM).
3. Completing the installation by pushing the fixture into the mounting plate.

Troubleshooting

Status	Cause	Solution
Indicator flashes	Charging	Keep it in Charging
Indicator light remains Lit	Full Charging	Normal Status
Indicator light is not illuminated	The emergency driver is not conncted	Check the circuit, circuit interface, or check if the driver is damaged
Upon pressing the button to turn off the indicator light, the fixture fails to illuminate	Battery failure	Do driver module replacement
The fixture stays lit upon pressing the button to switch off the indicator light.	Perform a 30-second emergency test	It will automatically return to normal charging status after 30 seconds
WARNING Risk of Electric Shock	Note: 1. Actuate the test switch once to verify that the battery is de-energized before performing installation, maintenance, storage or shipping. 2. Minimum charge duration: 24 hours.	

VERIFIED LIST OF TESTED DIMMERS

Brand	Model No.
LUTRON	DVCL-153P-AL
	DVCL-253P-WH
	AYCL-253P-LA
	PD-6WCL-WH-R
Leviton	IPL06-10Z
	IPE04-1LZ

MAINTENANCE

- This product is suitable for use in damp locations where the ambient temperature is a minimum of 10°C and a maximum of 50°C. Product is not suitable for heated air outlets and wet or hazardous locations.



Contains Li-ion, Rechargeable Battery. Must be recycled or disposed of properly.

FCC INFORMATION

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.