

GEREON 2 LIGHT SEMI FLUSH CONVERTIBLE PENDANT

7728502

General Product Information

| | | | |
|---|--|---|--|
|  <p>Intertek</p> |  <p>SAVE THESE INSTRUCTIONS!</p> |  <p>STANDARD INSTALLATION</p> |  <p>TITLE 24 COMPLIANT</p> |
|  <p>DIMMER COMPATIBLE</p> |  <p>BULB(S) (NOT INCLUDED)</p> |  <p>LED</p> |  <p>NEC COMPLIANT JUNCTION BOX</p> |
|  <p>DAMP LOCATION SAFE</p> |  <p>PLEASE SEE visualcomfort.com FOR PRODUCT SPECS</p> |  <p>CLEAN WITH SOFT, DRY CLOTH ONLY. NO HARSH CHEMICALS!</p> |  <p>BEST PRACTICE: HANDLE FIXTURE WITH GLOVES</p> |



WARRANTY



FCC STATEMENT

Tools Required



PHILLIPS-HEAD SCREWDRIVER

Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



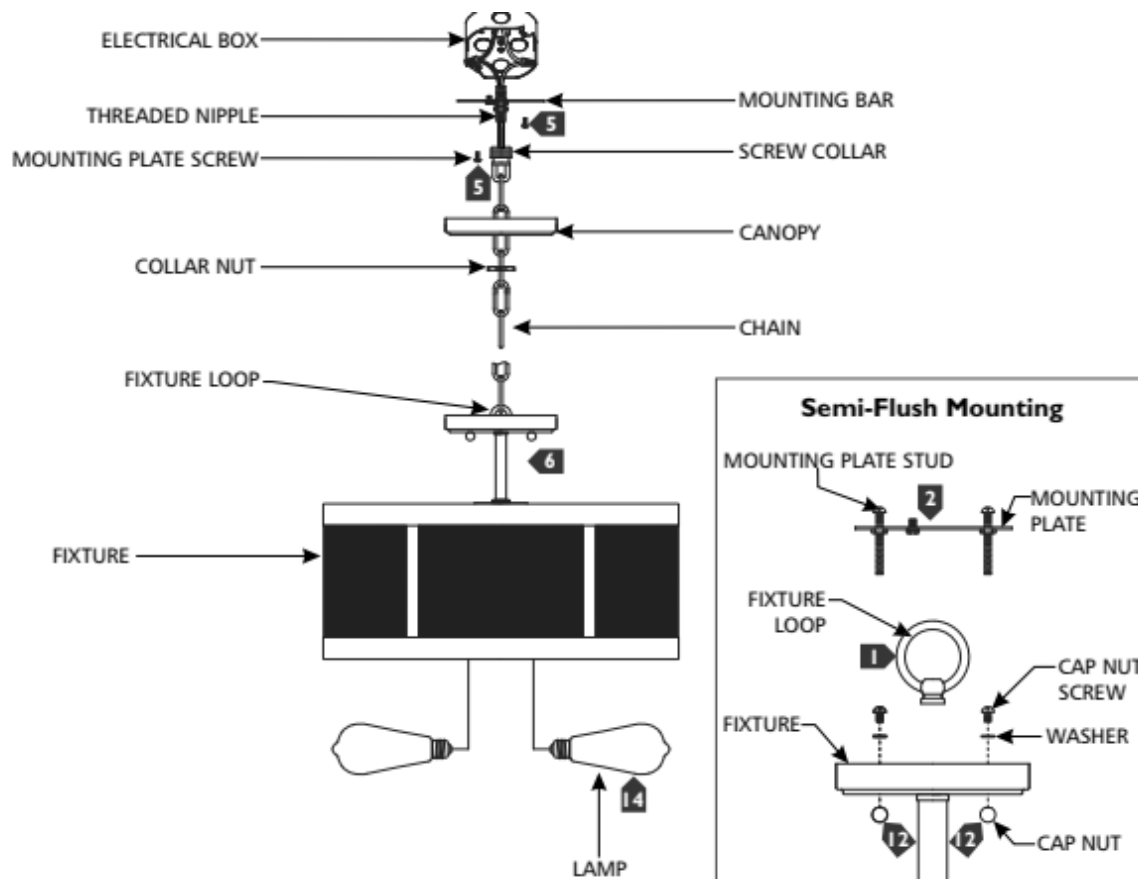

INSTRUCTIONS

I. Preparing the Fixture

1. **FOR SEMI-FLUSH MOUNT ONLY:** Unscrew and remove the fixture loop from the fixture, then unscrew the cap nuts to remove the cap nut screws and washers.
2. **FOR SEMI-FLUSH MOUNT ONLY:** Install the mounting plate to the electrical box with two mounting plate studs. **Skip to part II. Wiring the Fixture.**
3. If necessary, screw the shorter end of the threaded nipple tightly onto the mounting bar.
4. Temporarily unscrew and remove the collar nut from the screw collar, then screw the screw collar tightly onto the threaded nipple.
5. Secure the mounting bar to the electrical box with two mounting plate screws.
6. Screw the fixture loop onto the fixture. Determine the desired height of the fixture and open a link to remove a portion from the bottom of the chain.
7. Install the canopy and collar nut onto the chain, then install the open link onto the fixture loop. Close the link to secure in place.
8. Weave the cord through the chain and canopy, then trim the cord, leaving enough length to make electrical connections.

II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around, or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:

- a) White fixture wire to neutral power line wire
 - b) Black fixture wire to hot power line wire
4. **FOR SEMI-FLUSH MOUNT ONLY:** Align, then place the fixture onto the mounting plate studs. Secure with two cap nuts. **SKIP TO STEP 6.**
 5. Neatly place all wires into the electrical box, place the canopy onto the ceiling, and screw the collar nut tightly onto the screw collar to secure in place.
 6. Screw lamps into sockets to complete installation.