

































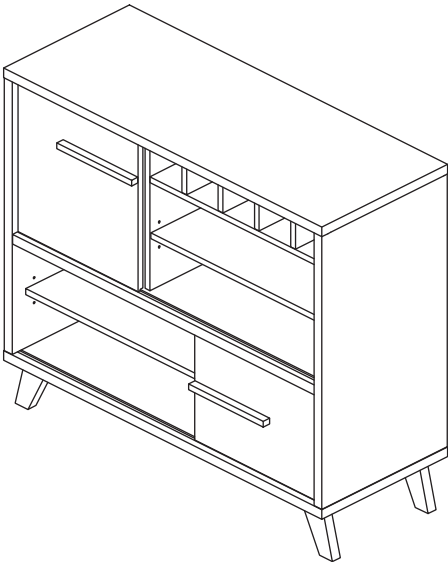


# ASSEMBLY INSTRUCTION

## SERVER

<b>A</b> Top Panel  1pc	<b>B</b> Left Side Panel  1pc	<b>C</b> Right Side Panel  1pc	<b>D</b> Bottom Panel  1pc
<b>E</b> Top Shelf Panel  1pc	<b>F</b> Shelf  1pc	<b>G</b> Adjustable Shelf Panel  2pcs	<b>H</b> Small Top Divider Panel  4pcs
<b>I</b> Big Top Divider Panel  1pc	<b>J</b> Bottom Divider Panel  1pc	<b>K</b> Handle  2pcs	<b>L</b> Top Door  1pc
<b>M</b> Bottom Door  1pc	<b>N</b> Back Panel  1pc	<b>O</b> H-Holder  2pcs	<b>P</b> Leg  1pc
<b>Q</b> Support Leg  1pc	<b>R</b> Iron Plate 3.15" x 3.15" x 0.07"  2pcs	<b>S</b> Minifix ø0.27" x 0.8"  1pc	<b>T</b> Cam 0.47"  4pcs
<b>U</b> Wood Dowel ø0.23" x 0.98"  1pc	<b>V</b> Screw ø0.17" x 1.96"  4pcs	<b>W</b> Wood Dowel ø0.31" x 1.57"  16pcs	<b>X</b> Screw ø0.16" x 0.98"  16pcs
<b>Y</b> Shelf Support 0.19" x 0.59"  8pcs	<b>Z</b> Screw M6 x 0.78"  8pcs	<b>AA</b> Hanger Bolt ø0.25" x 1.57"  12pcs	<b>AB</b> Adjustable Leg 0.25" x 0.87"  4pcs
8pcs	8pcs	1pc	1pc

<b>AC</b> Screw $\varnothing 0.16'' \times 0.62''$  16pcs	<b>AD</b> Back Plate Holder $0.12'' \times 0.59''$ (Screw)  8sets	<b>AE</b> Allen Wrench M4 x 2.2"  1pc	<b>AF</b> Sticker  8pcs
<b>AG</b> Glue  2pcs	<b>AH</b> Anti-Tipping Kit  1set		




These pages list all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

\*\*\* **Do not tighten screws & bolts until the entire unit is completely assembled.**


**1**

Insert Minifix (S) into Top Panel (A), Left & Right Side Panel (B & C), Shelf (F) and Big Top Divider Panel (I). Apply Glue (AG) to the Dowel Holes of Left & Right Side Panel (B & C) and Shelf (F) and insert Wood Dowel (W). Apply Glue (AG) to the Dowel Holes of Top Shelf Panel (E), Small & Big Top Divider Panel (H & I), Bottom Divider Panel (J) and Handle (K) and insert Wood Dowel (U). Attach Iron Plate (R) to Leg (P) using Screw (Z) with screwdriver (not provided).

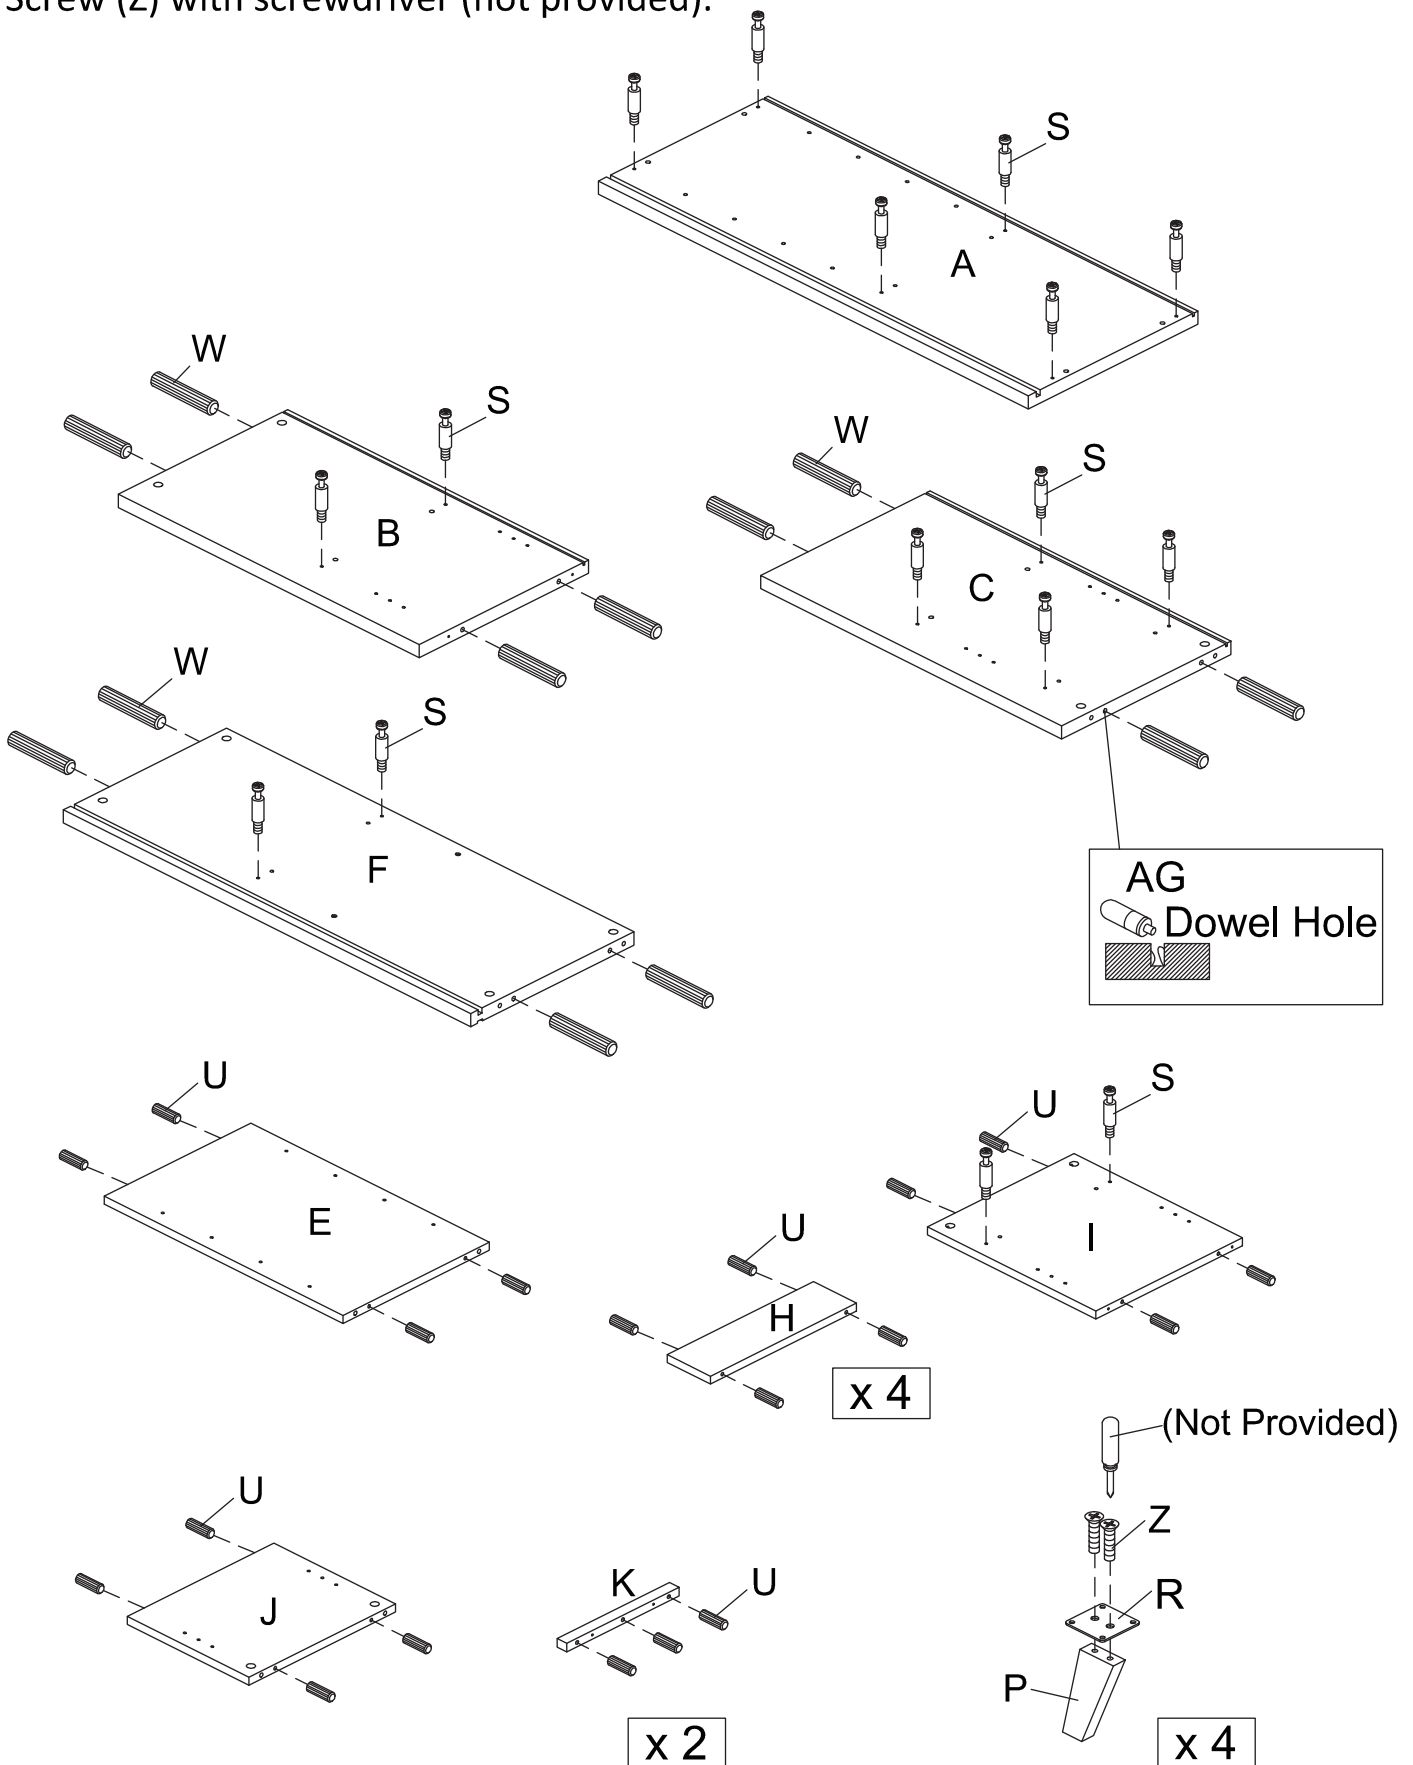


2

Insert Cam (T) into Top Shelf Panel (E). Attach Big Top Divider Panel (I) to Top Shelf Panel (E) using Cam (T) with screwdriver (not provided). Apply Glue (AG) to the Dowel Holes of Top Shelf Panel (E). Then attach Small Top Divider Panel (H) to Top Shelf Panel (E).

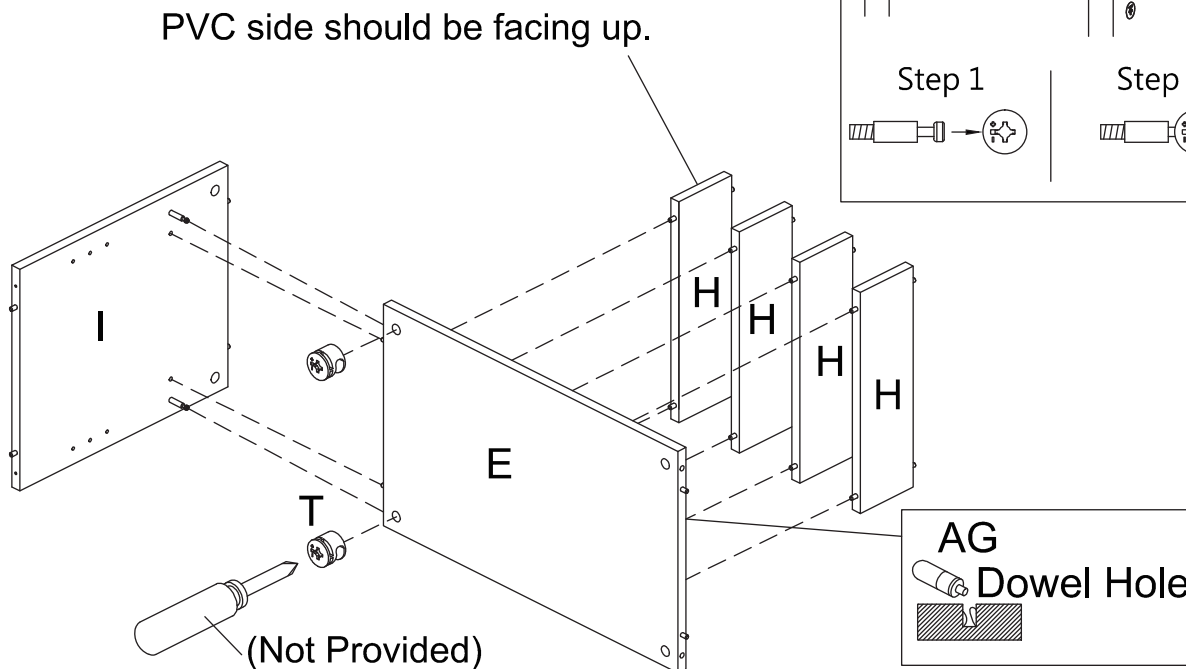


3

Apply Glue (AG) to the Dowel Holes of Shelf (F). Then attach Big Top Divider Panel (I) to Shelf (F) using Screw (V) with screwdriver (not provided).

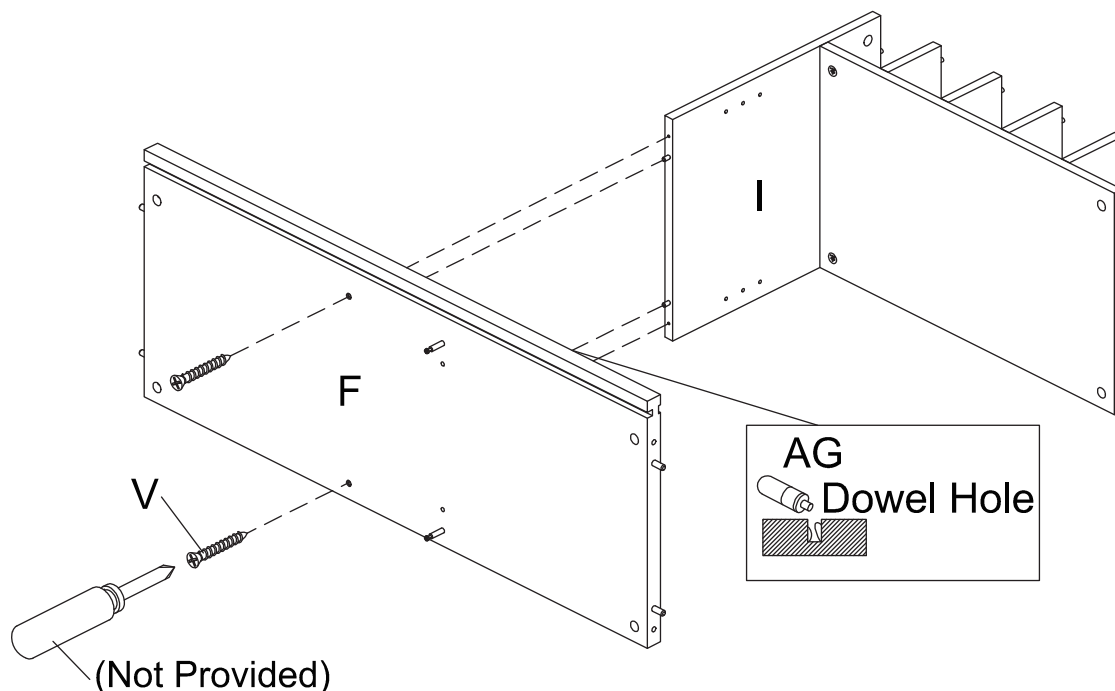


4

Insert Cam (T) into Top Shelf Panel (E) and Shelf (F). Then attach Left & Right Side Panel (B & C) to Top Shelf Panel (E) and Shelf (F) using Cam (T) with screwdriver (not provided).

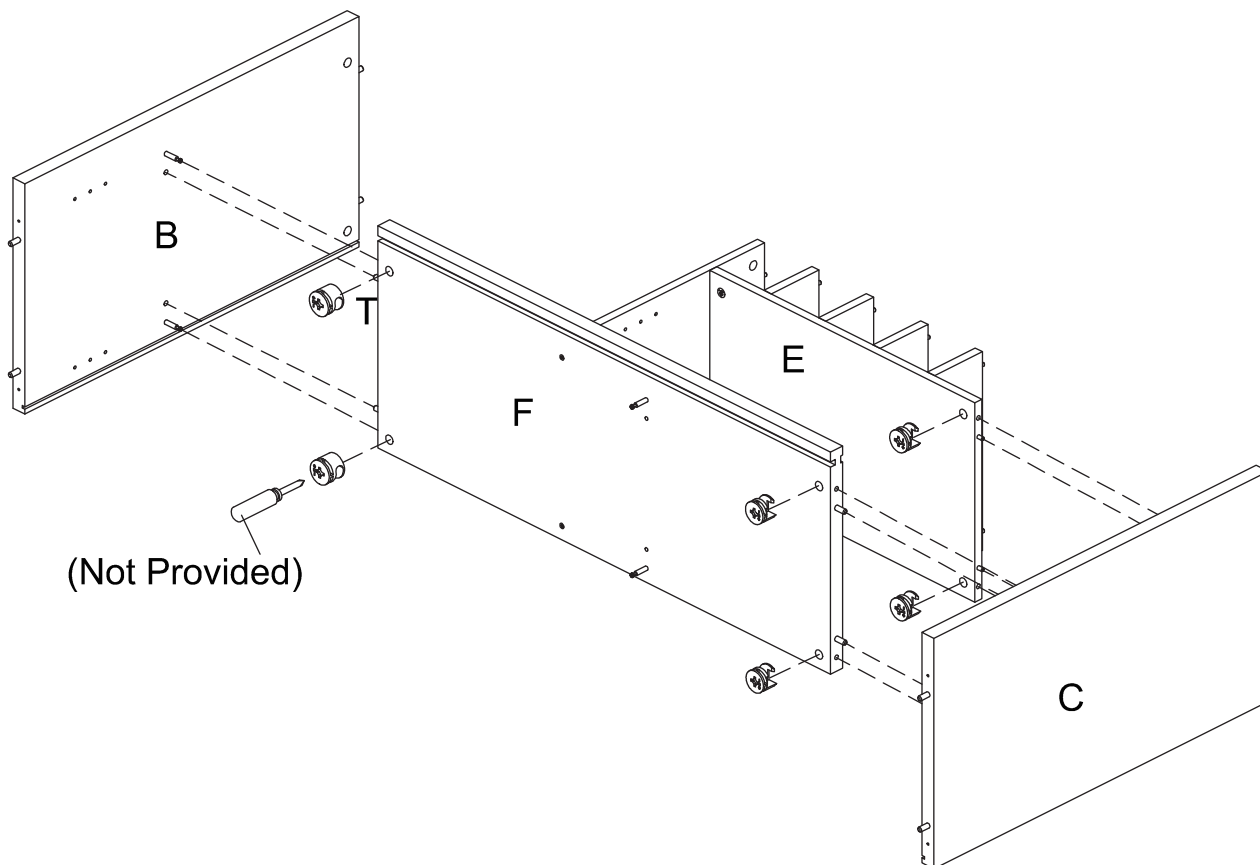


5

Insert Cam (T) into Left & Right Side Panel (B & C), Big Top Divider Panel (I) and Bottom Divider Panel (J). Apply Glue (AG) to the Dowel Holes of Top Panel (A) and Shelf (F). Then attach Top Panel (A) to Left & Right Side Panel (B & C) and Big Top Divider Panel (I) using Cam (T) with Allen Wrench (AE) and screwdriver (not provided) and cover Cam (T) by Sticker (AF). Attach Bottom Divider Panel (J) to Shelf (F) using Cam (T) with screwdriver (not provided) and cover Cam (T) by Sticker (AF).

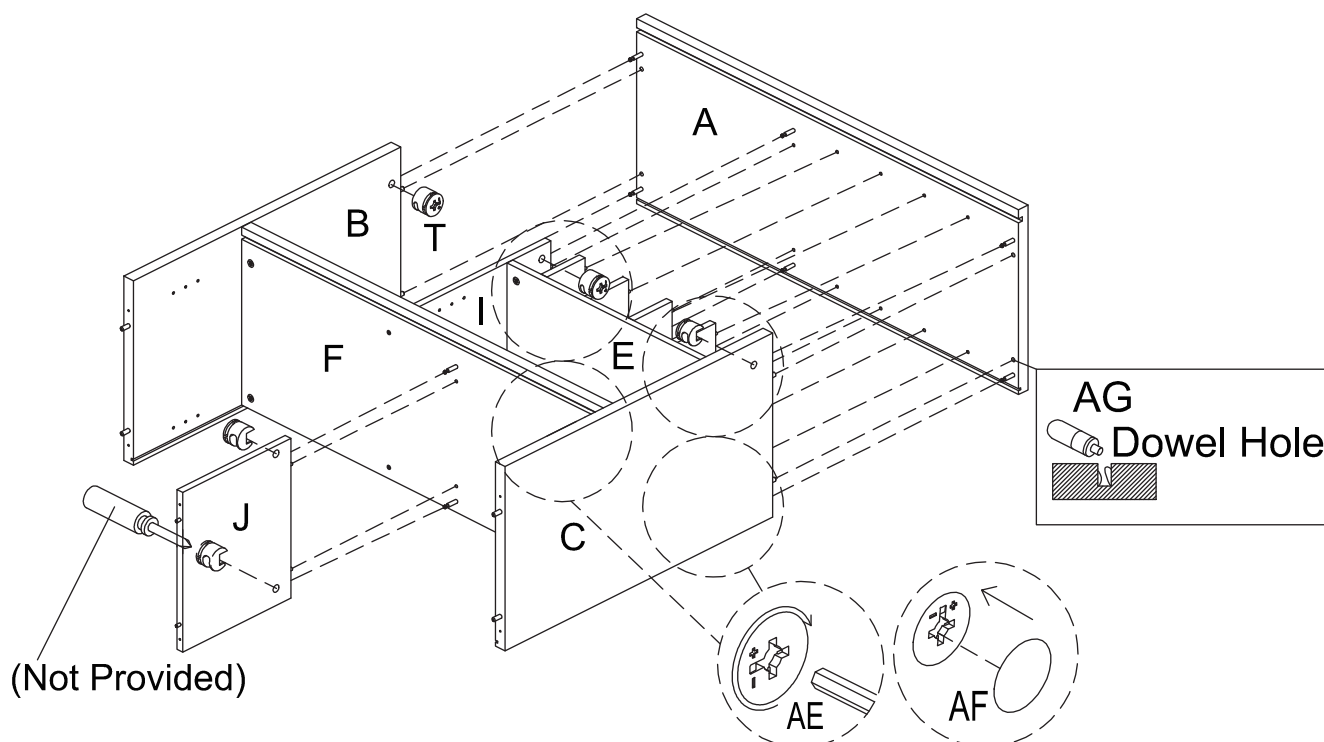


6

Slot the first Back Panel (N), H-Holder (O) and the second Back Panel (N) into the grooves of Top Panel (A) and Left & Right Side Panel (B & C). Then attach Bottom Panel (D) to Left & Right Side Panel (B & C) and Bottom Divider Panel (J) using Screw (V) with screwdriver (not provided).

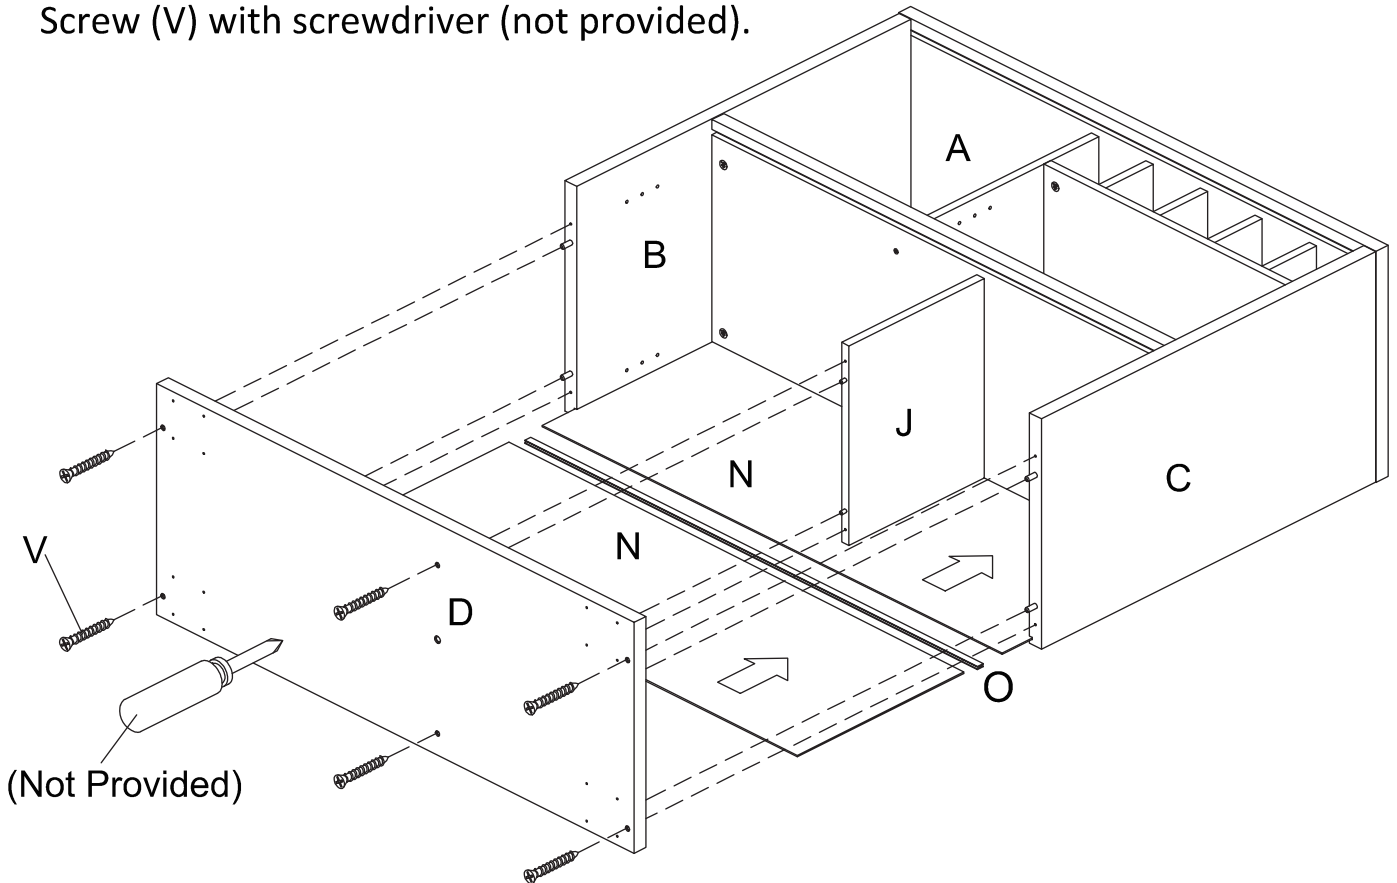


7

Attach Leg (P) to Bottom Panel (D) by Iron Plate (R) using Screw (AC) with screwdriver (not provided). Insert Hanger Bolt (AA) and Adjustable Leg (AB) into Support Leg (Q) and attach to Bottom Panel (D).

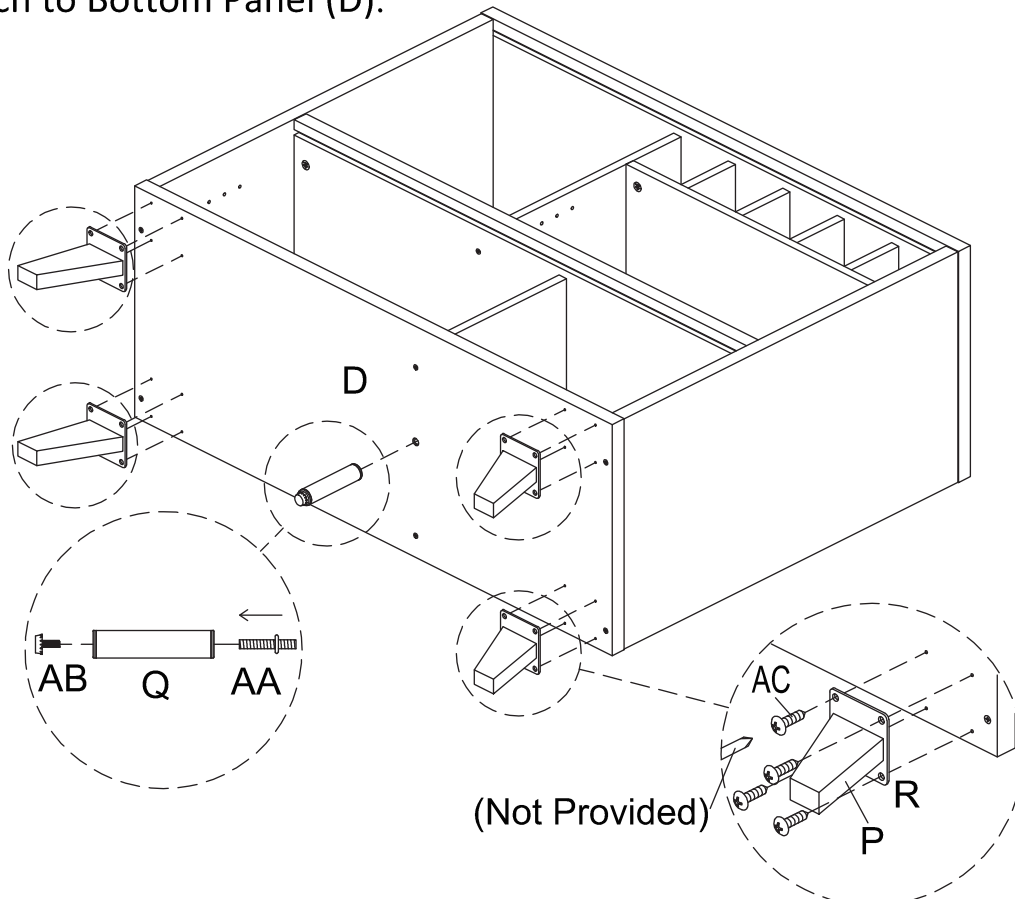


8

Insert Shelf Support (Y) into Left & Right Side Panel (B & C), Big Top Divider Panel (I) and Bottom Divider Panel (J). Then put Adjustable Shelf Panel (G) into the server.

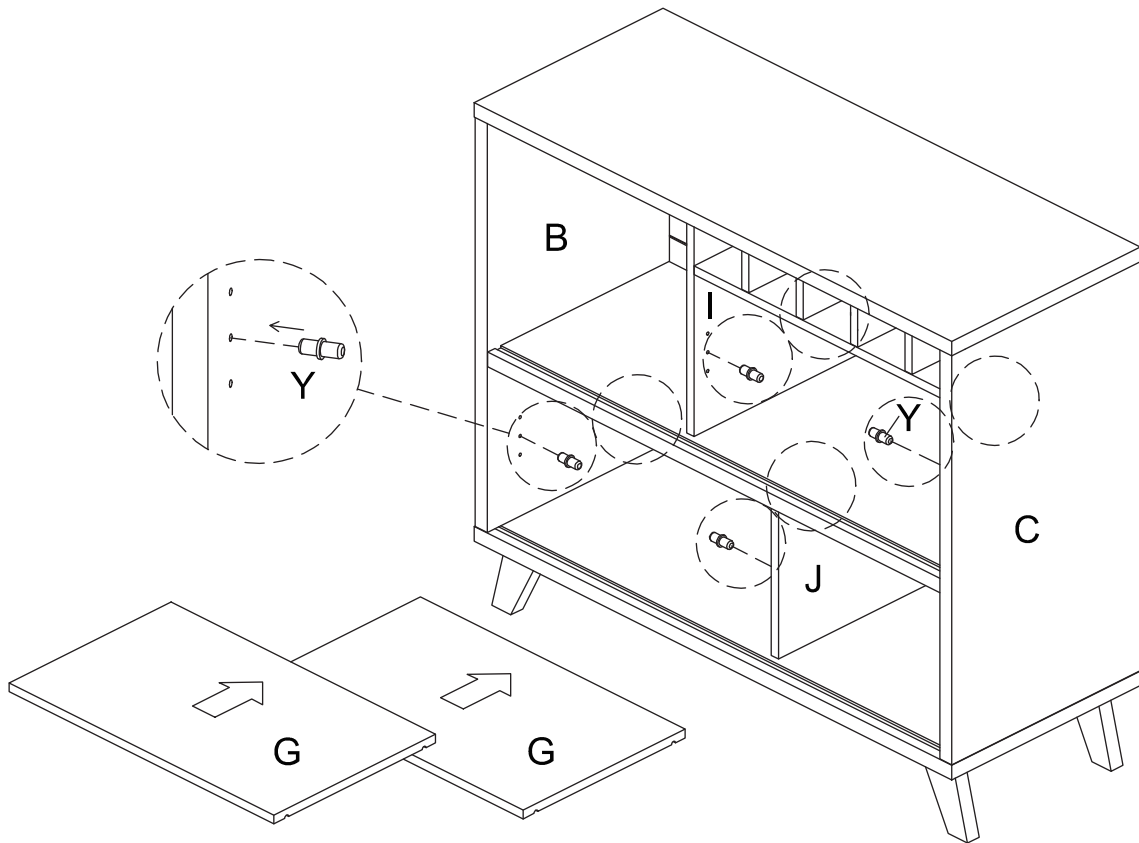

9


Attach Handle (K) to Top & Bottom Door (L & M) using Screw (X) with screwdriver (not provided). Then slot Top & Bottom Door (L & M) into the grooves of Top Panel (A), Shelf (F) and Bottom Panel (D).

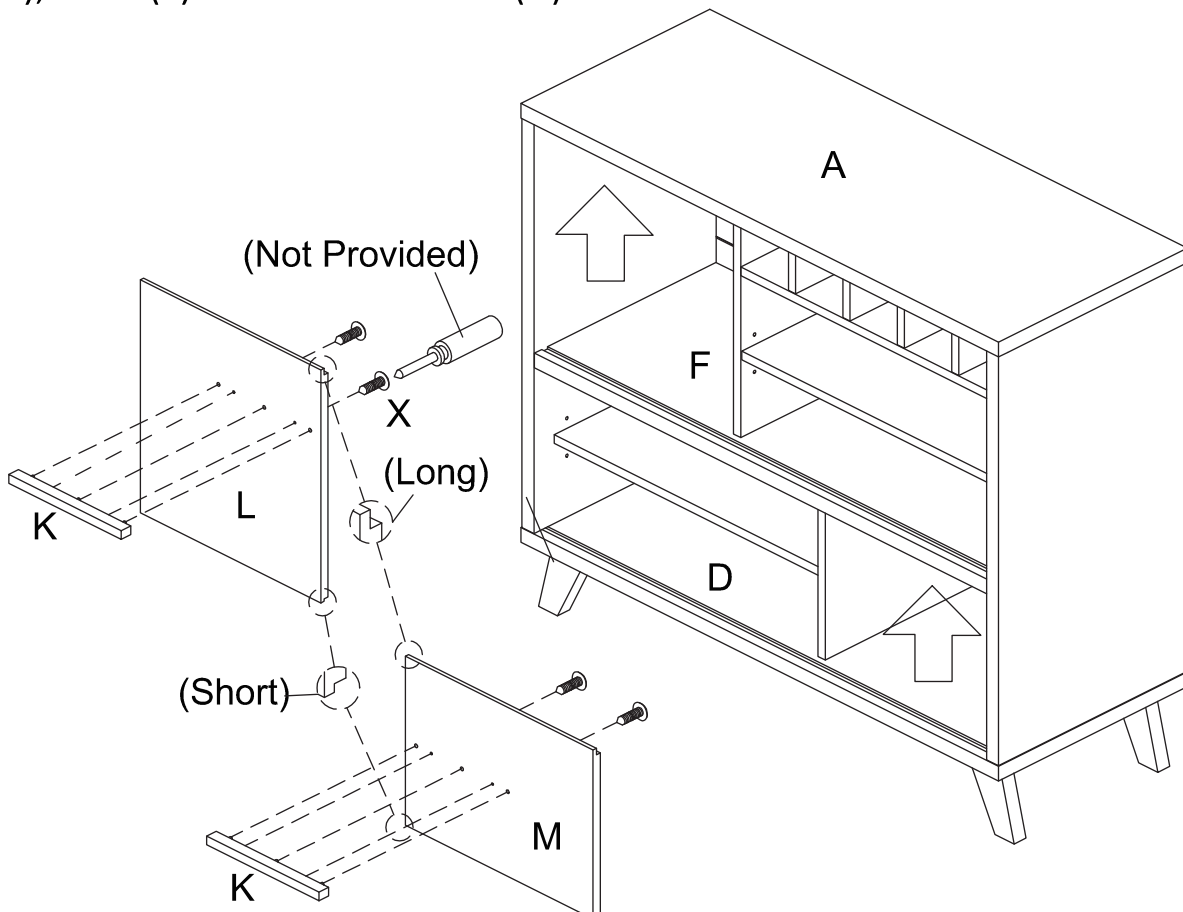

**10** Attach Back Plate Holder (AD) to the four corners of each Back Panel (N) with screwdriver (not provided).

Follow the instructions below to attach Anti-Tipping Kit (AH) to the wall.

Drill a 7mm hole on the wall and fix Wall Anchor into it. Attach Wall Hanger to Wall Anchor and the wall using Long Screw and screwdriver (not provided). Then attach Bracket to the back of Top Panel (A) using Small Screw and screwdriver (not provided). Thread Cable Tie through Bracket and Wall Hanger and pull it tight.

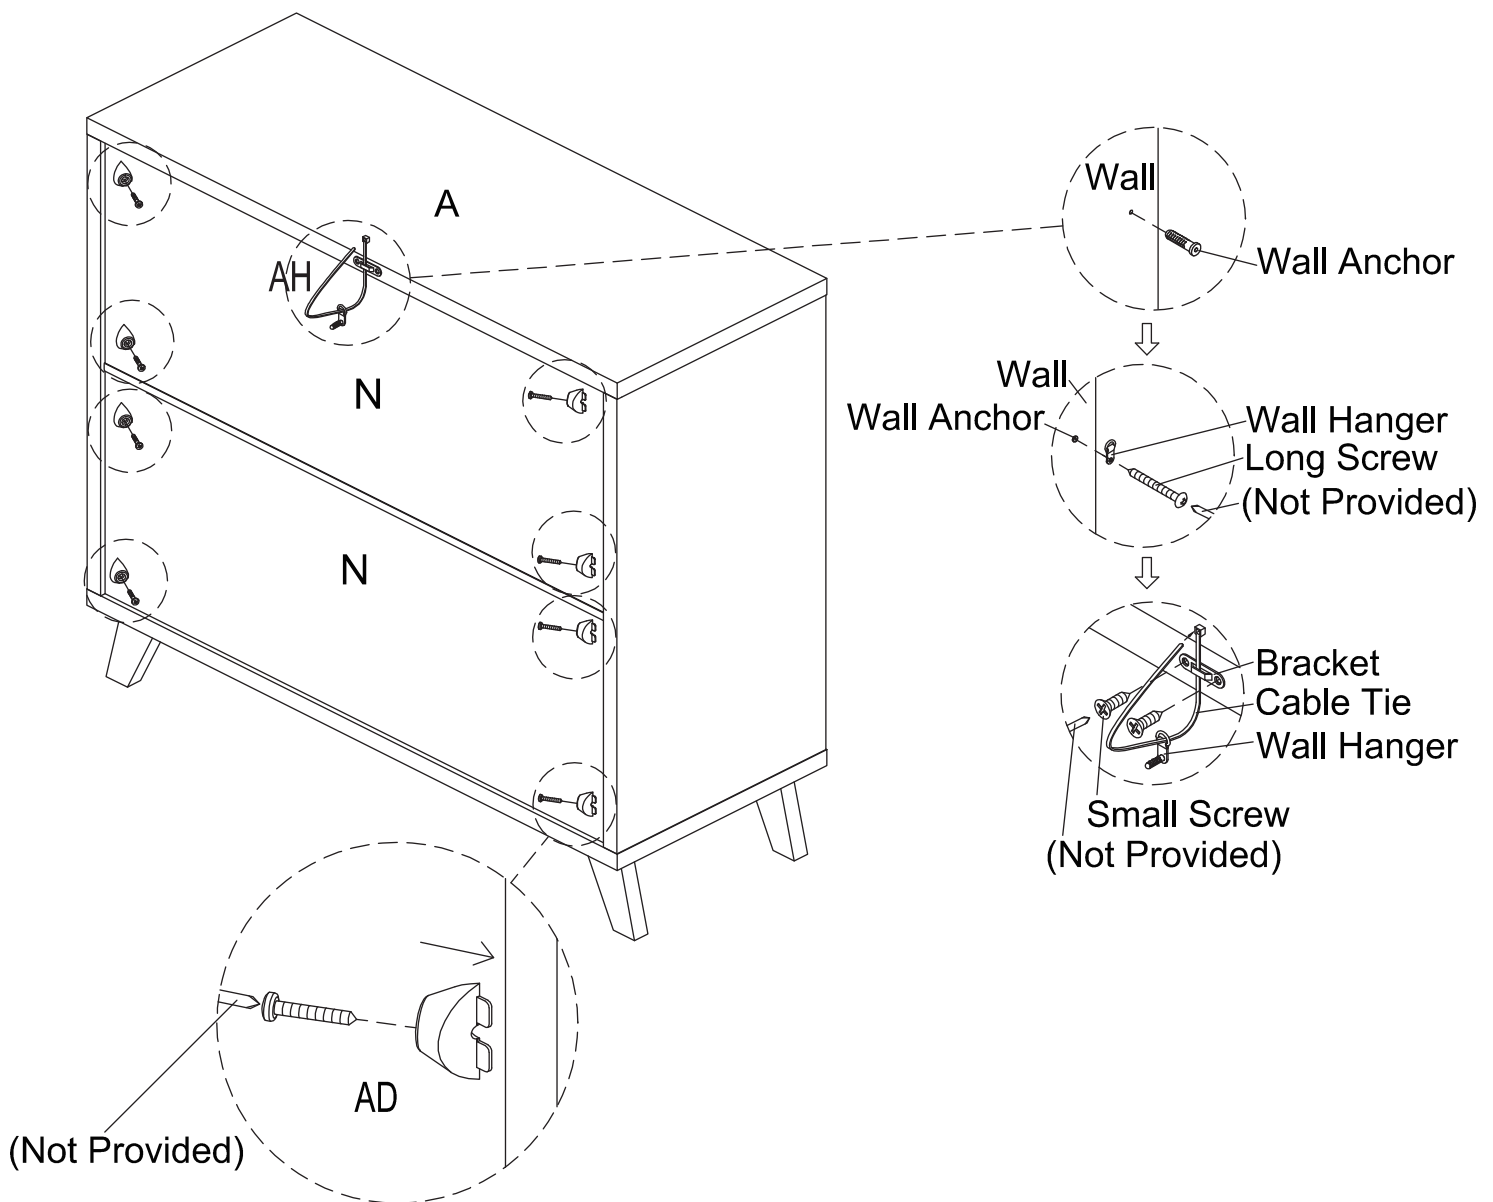

## Cleaning & Care

Treat surfaces with care. Surfaces are resistant to scratches but are not scratch resistant. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.